

ORION™ TL

POLES

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

ORION™ TL

POLES

TYPE:

PROJECT NAME:



Fixture Specifications

Protection . IP 65 - IK 08

Body Pole . Extruded aluminium alloy

Body/Base . Die-cast aluminium alloy

Screen . Opal polycarbonate

Seals . Closed-cell EPDM rubber

Screws . Stainless steel A2

Paint / Finishing . Anti-corrosive UV stabilised polyester powder

Finishes



PURE WHITE
RAL 9016



BLACK
RAL 9005



WHITE
RAL 9010



BRONZE



RUST



ANTHRACITE



SLATE GREY



GREY
RAL 9006

Assembly

Ground connection system with anchoring brackets to be ordered separately. The orientation is independent of the layout of the ground fixing holes.

Application



Residential areas




Cycle
Pedestrian paths



Access areas



Parks
Gardens

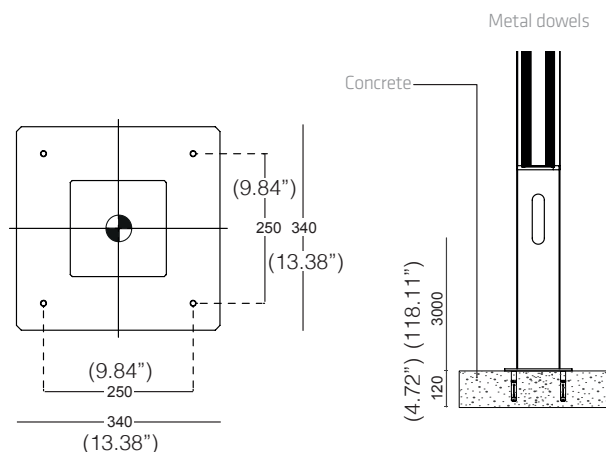





ORION™ TL

POLES

TYPE:

PROJECT NAME:

	1 WAY >120°	I	21W	2160 lm	1010 lm	3000 K	80
	1 WAY >120°	I	21W	2400 lm	1120 lm	4000 K	80
	2 WAYS >120°	I	40W	4320 lm	2020 lm	3000 K	80
	2 WAYS >120°	I	40W	4800 lm	2240 lm	4000 K	80
	360°	I	80W	8640 lm	4040 lm	3000 K	80
	360°	I	80W	9600 lm	4490 lm	4000 K	80

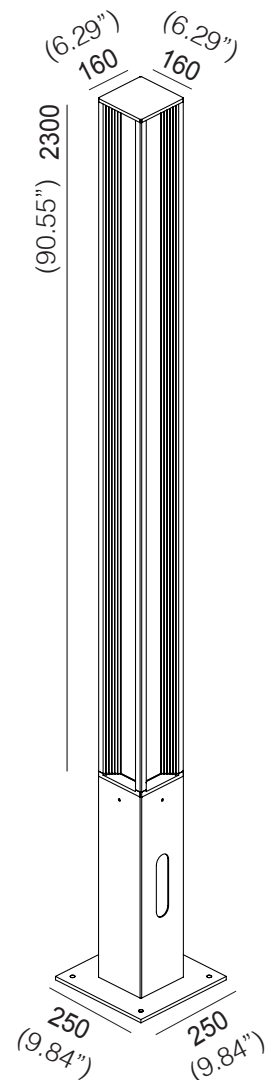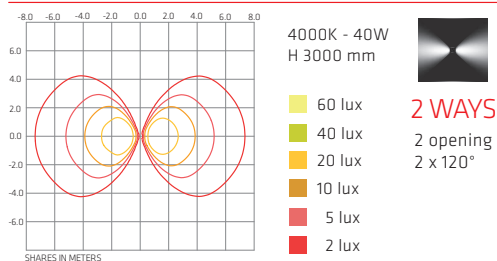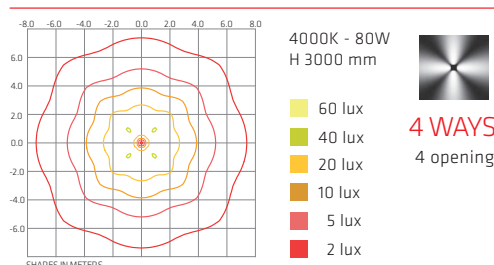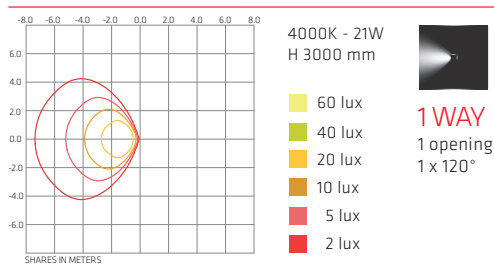

3000 (118.11")

ORDERING INFO

Model (Order Code)	Finish Options	Optic Options	Accessories	LED	Dimming Options
☐ L90491F2	☐ 00: Pure White ☐ 10: White ☐ 24: Bronze ☐ 25: Rust ☐ 01: Black ☐ 30: Anthracite ☐ 35: Slate Grey ☐ 40: Grey	☐ One Way Optic ☐ Two Ways Optic ☐ Four Ways Optic	☐ G: Ground Anchoring Bracket	☐ 30: 3000K ☐ 40: 4000K	☐ 120V LTE ☐ 120V-277V 0-10V (Universal Voltage)



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM