

POCKET™

RECESSED

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM

POCKET™ SMALL

RECESSED

TYPE:

PROJECT NAME:

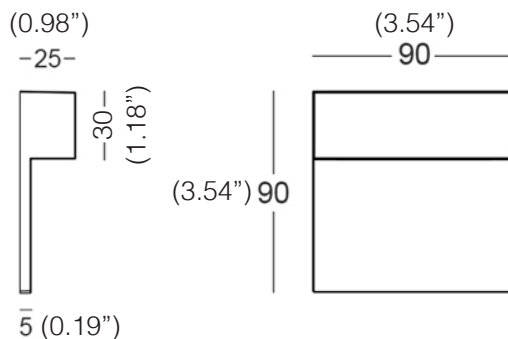

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall recessed installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminum

SCREEN

Pointed glass

SEALS

Molded silicone gasket UV Resist

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

24Vdc

ABSORBED POWER

2W

SOURCE

LED

CCT LED

2700K / 3000K / 4000K

SOURCE FLUX

280 lm

FIXTURE SOURCE

160 lm

APPARENT EFFICIENCY

57 %

OPERATING TA

50 °

CRI

80

STEP MACADAM

3


LIFE TIME TM-21

L80B10 50000h

BEAM OPENING

Diffuse

COLORS

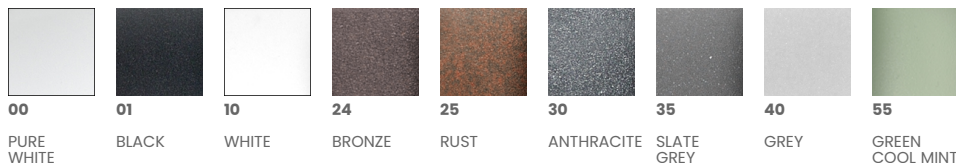

ACCESSORIES



recessed box 502
L 70 x W 50 x H 70
(2.75" x 1.96" x 2.75")

ORDERING INFO

Model (Order Code)	Finish Options	Accessories	LED	Dimming Options
<input type="radio"/> L909200R	<input type="radio"/> 00: Pure White <input type="radio"/> 10: White <input type="radio"/> 24: Bronze <input type="radio"/> 25: Rust <input type="radio"/> 01: Black <input type="radio"/> 30: Anthracite <input type="radio"/> 35: Slate Grey <input type="radio"/> 40: Grey <input type="radio"/> 55: Green Cool Mint	<input type="radio"/> 502: Recessed Box 502	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V (Universal Voltage)




POCKET™ MEDIUM

RECESSED

TYPE:

PROJECT NAME:

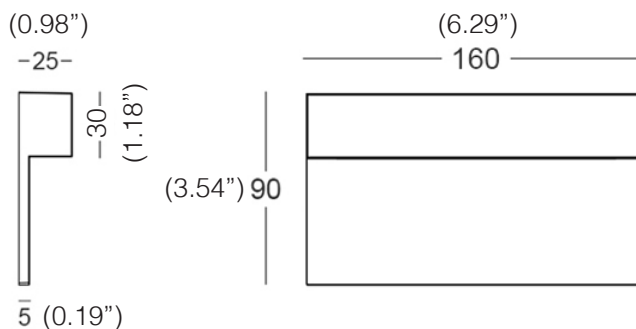

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall recessed installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminum

SCREEN

Pointed glass

SEALS

Molded silicone gasket UV Resist

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

24Vdc

ABSORBED POWER

4W

CCT LED

2700K / 3000k / 4000k

SOURCE FLUX

560 lm

FIXTURE SOURCE

310 lm

APPARENT EFFICIENCY

55 %

OPERATING TA

50 °

CRI

80

STEP MACADAM

3


LIFE TIME TM-21

L80B10 50000h

BEAM OPENING

Diffuse

COLORS

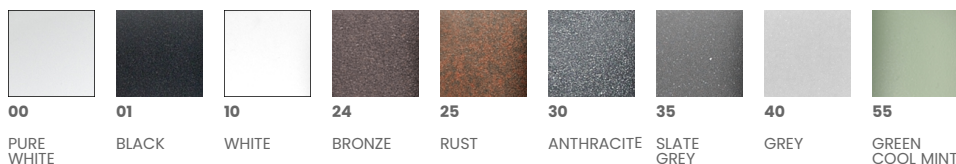

ACCESSORIES



recessed box 503
L 108 x W 53 x H 74
(4.25" x 2.08" x 2.91")


ORDERING INFO

Model (Order Code)	Finish Options	Accessories	LED	Dimming Options
<input type="radio"/> L909201R	<input type="radio"/> 00: Pure White <input type="radio"/> 10: White <input type="radio"/> 24: Bronze <input type="radio"/> 25: Rust <input type="radio"/> 01: Black <input type="radio"/> 30: Anthracite <input type="radio"/> 35: Slate Grey <input type="radio"/> 40: Grey <input type="radio"/> 55: Green Cool Mint	<input type="radio"/> 503: Recessed Box 503	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V (Universal Voltage)



POCKET™ LARGE
RECESSED

TYPE:
PROJECT NAME:

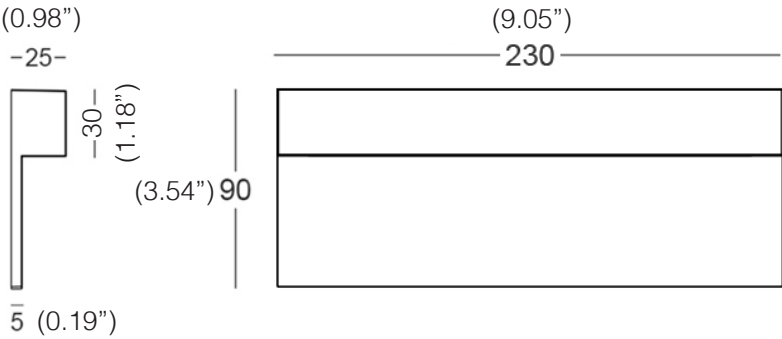

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall recessed installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminum

SCREEN

Pointed glass

SEALS

Molded silicone gasket UV Resist

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

24Vdc

ABSORBED POWER

6W

CCT LED

2700K / 3000K / 4000K

SOURCE FLUX

840 lm

FIXTURE SOURCE

460 lm

APPARENT EFFICIENCY

55 %

OPERATING TA

50 °

CRI

80

STEP MACADAM


3

LIFE TIME TM-21

L80B10 50000h

BEAM OPENING Diffuse

COLORS

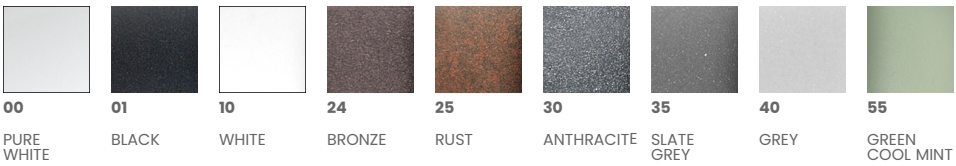

ACCESSORIES



recessed box 504
L 133 x W 53 x H 74
(5.23" x 2.08" x 2.91")

ORDERING INFO

Model (Order Code)	Finish Options	Accessories	LED	Dimming Options
<input type="radio"/> L909202R	<input type="radio"/> 00: Pure White <input type="radio"/> 10: White <input type="radio"/> 24: Bronze <input type="radio"/> 25: Rust <input type="radio"/> 01: Black <input type="radio"/> 30: Anthracite <input type="radio"/> 35: Slate Grey <input type="radio"/> 40: Grey <input type="radio"/> 55: Green Cool Mint	<input type="radio"/> 504: Recessed Box 504	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V (Universal Voltage)

