

POP HOST™

SUSPENSION

TYPE:

PROJECT NAME:



BI COLOR FINISH



MONO WHITE FINISH

SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 05/27/25

POP HOST™ 32

SUSPENSION

TYPE:

PROJECT NAME:

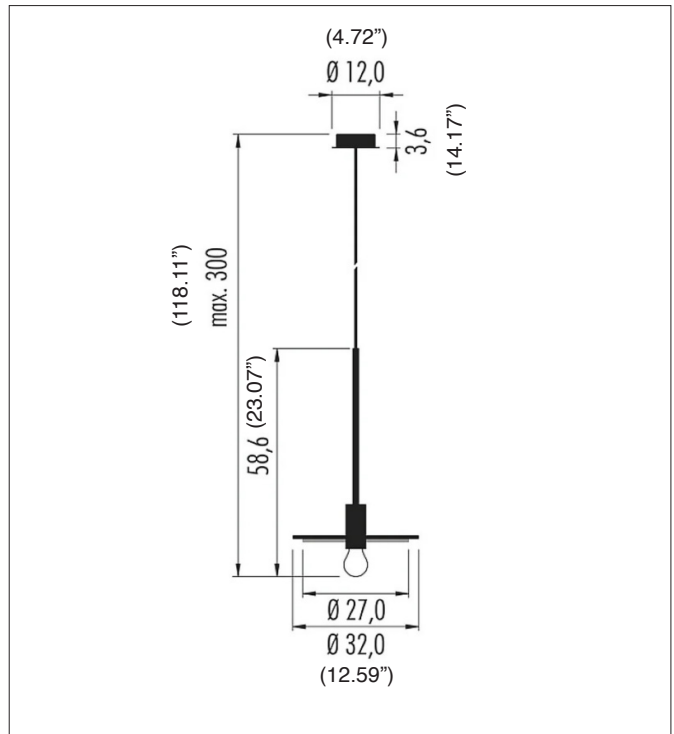

☐ Up ☐ Down Diffuser color

KS			Black/Brass
WS			White/Brass
BS			Blue/Brass
GS			Green/Brass
PS			Rose/Brass
RS			Red/Brass
06			White/White

Power E26

Luminaire Light Flux 2700K 470 lm

Color rendering: CRI >80

Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V

Mounting: Supplied with 94.48" (2400mm) power cable and canopy. To be installed on a standard octagonal junction box. Custom cable length on request (Please specify).

ORDERING INFO

Model (Order Code)	Finish Options	Driver Options
☐ L173H32C.12L Ø12.6"	☐ KS: Black / Brass ☐ WS: White / Brass ☐ BS: Blue / Brass ☐ GS: Green / Brass ☐ PS: Rose / Brass ☐ RS: Red / Brass ☐ 06: White	☐ 120V LTE

Fixture comes with a 4" backplate that mounts to a standard junction box.



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 05/27/25

POP HOST™ 32

SUSPENSION - SWAG CABLE

TYPE:

PROJECT NAME:

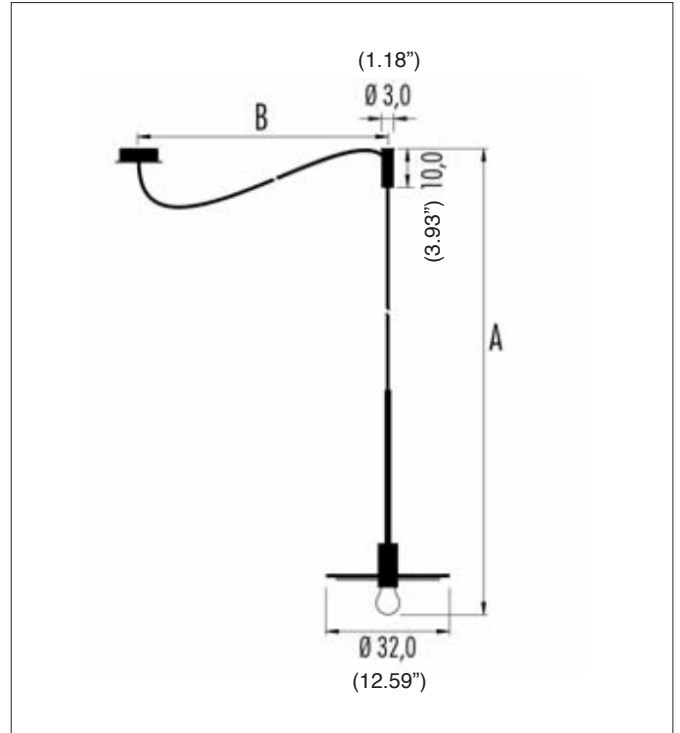

☐ Up ☐ Down Diffuser color

KS	☐	☐	Black/Brass
WS	☐	☐	White/Brass
BS	☐	☐	Blue/Brass
GS	☐	☐	Green/Brass
PS	☐	☐	Rose/Brass
RS	☐	☐	Red/Brass

06 ☐ ☐ White/White

Power E26

Luminaire Light Flux 2700K 470 lm

Color rendering: CRI >80

Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V

Mounting:

To be installed on a standard octagonal junction box. Custom cable length on request (Please specify).

ORDERING INFO

Model (Order Code)	Finish Options	Driver Options
☐ L173H32D.12L Ø12.6"	☐ KS: Black / Brass ☐ WS: White / Brass ☐ BS: Blue / Brass ☐ GS: Green / Brass ☐ PS: Rose / Brass ☐ RS: Red / Brass ☐ 06: White	☐ 120V LTE

Fixture comes with a 4" backplate that mounts to a standard junction box.



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 05/27/25

POP HOST™ 80

SUSPENSION

TYPE:

PROJECT NAME:

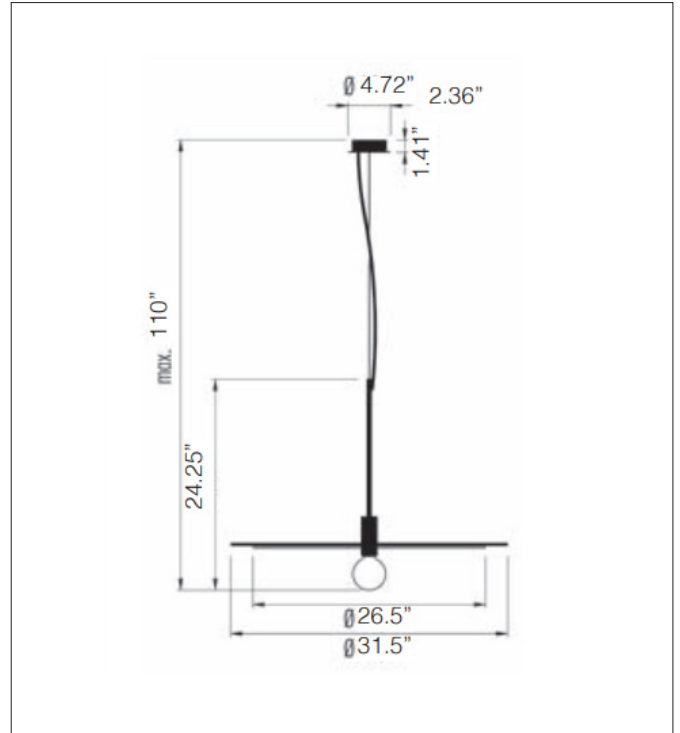

☐ Up ☐ Down Diffuser color

KS			Black/Brass
WS			White/Brass
BS			Blue/Brass
GS			Green/Brass
PS			Rose/Brass
RS			Red/Brass
06			White/White

Power	E26	
Luminaire Light Flux	2700K	470 lm
Color rendering: CRI >80		
Ingress protection: IP20		
Electrical: High efficiency electronic power supply, rated 50,000 hours 120V		
Mounting: Supplied with 82.67" (2100mm) power cable and canopy. To be installed on a standard octagonal junction box. Custom cable length on request (Please specify).		

ORDERING INFO

Model (Order Code)	Finish Options	Driver Options
☐ L173H80C.12L Ø31.5"	☐ KS: Black / Brass ☐ WS: White / Brass ☐ BS: Blue / Brass ☐ GS: Green / Brass ☐ PS: Rose / Brass ☐ RS: Red / Brass ☐ 06: White	☐ 120V LTE

Fixture comes with a 4" backplate that mounts to a standard junction box.



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 05/27/25

POP HOST™ 80

SUSPENSION - SWAG CABLE

TYPE:

PROJECT NAME:

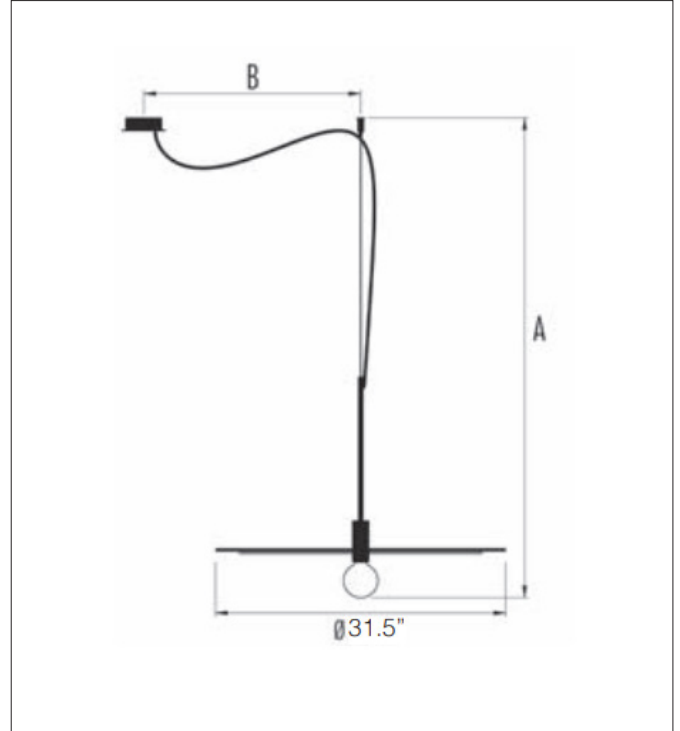

☐ Up Down Diffuser color

KS			Black/Brass
WS			White/Brass
BS			Blue/Brass
GS			Green/Brass
PS			Rose/Brass
RS			Red/Brass

06   White/White

Power E26

Luminaire Light Flux 2700K 470 lm

Color rendering: CRI >80

Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V

Mounting:

To be installed on a standard octagonal junction box.
Custom cable length on request (Please specify).

ORDERING INFO

Model (Order Code)	Finish Options	Driver Options
☐ L173H80D.12L Ø31.5"	☐ KS: Black / Brass ☐ WS: White / Brass ☐ BS: Blue / Brass ☐ GS: Green / Brass ☐ PS: Rose / Brass ☐ RS: Red / Brass ☐ 06: White	☐ 120V LTE

Fixture comes with a 4" backplate that mounts to a standard junction box.



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

Last updated: 05/27/25