

POP HOST™

WALL SUSPENSION

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 05/12/25


POP HOST™

WALL SUSPENSION


TYPE:

PROJECT NAME:

POP HOST T - PLUGIN VERSION

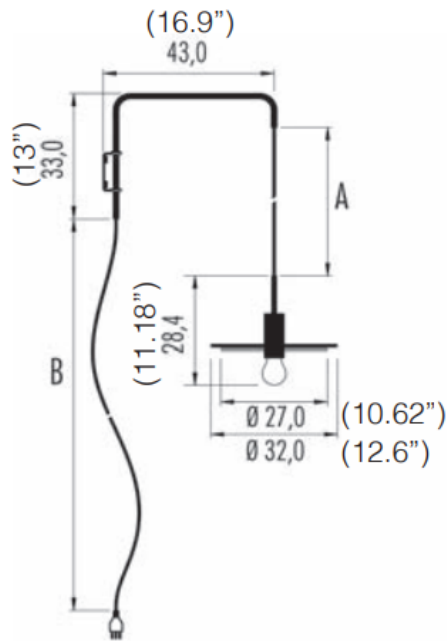

POP HOST N - HARDWIRED VERSION

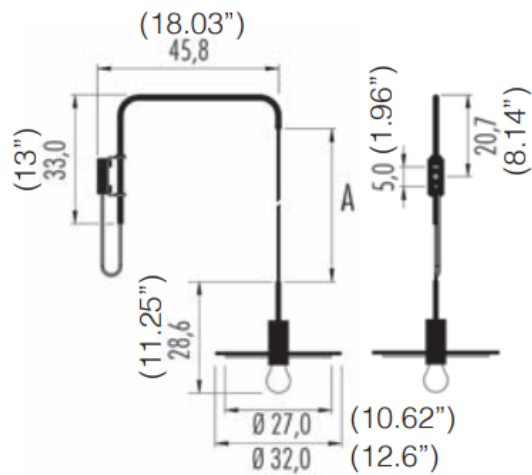

IP20	Ⓛ	A+B=360cm (141.7")
120V	e26 7W	CRI>80
L173H32T.12L	□	dim. IGBT - Triac
Led color	Nominal lm	Beam spread
2700K	806	180°
□	Up	Down
KS	●	●
WS	○	●
BS	●	●
GS	●	●
PS	●	●
RS	●	●
		Diffuser color
		Black/Brass
		White/Brass
		Blue/Brass
		Green/Brass
		Rose/Brass
		Red/Brass

IP20	Ⓛ	A= max. 140cm (55.11")
120V	e26 7W	CRI>80
L173H32N.12L	□	dim. IGBT - Triac
Led color	Nominal lm	Beam spread
2700K	806	180°

Hardwired version comes with a 4" backplate that mounts to a standard junction box.

ORDERING INFO

Model (Order Code)	Finish Options	Voltage
○ L173H32T.12L Plug-in Version	○ KS: Black / Brass	○ 120V LTE
○ L173H80N.12L Hardwire Version	○ WS: White / Brass	
	○ BS: Blue / Brass	
	○ GS: Green / Brass	
	○ PS: Rose / Brass	
	○ RS: Red / Brass	



POP HOST™



WALL SUSPENSION

TYPE:

PROJECT NAME:

POP HOST L - PLUGIN VERSION

POP HOST M - HARDWIRED VERSION

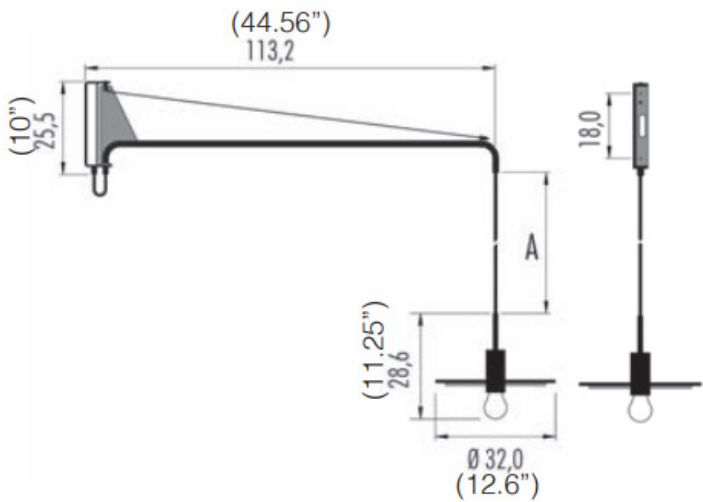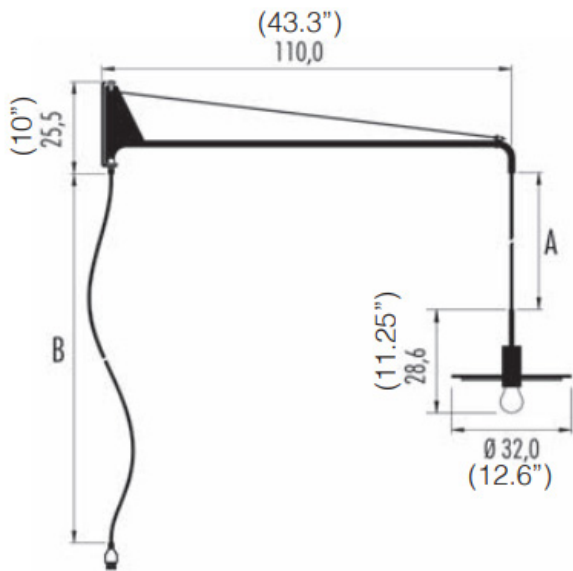

IP20	Ⓛ	A+B=300cm (118\")
120V	e26 7W	CRI>80
L173H32L.12L.□	dim. IGBT - Triac	
Led color	Nominal lm	Beam spread
2700K	806	180°

IP20	Ⓛ	A= max. 130cm (51\")
120V	e26 7W	CRI>80
L173H32M.12L.□	dim. IGBT - Triac	
Led color	Nominal lm	Beam spread
2700K	806	180°

□	Up	Down	Diffuser color
KS	●	●	Black/Brass
WS	○	●	White/Brass
BS	●	●	Blue/Brass
GS	●	●	Green/Brass
PS	●	●	Rose/Brass
RS	●	●	Red/Brass

Hardwired version comes with a 4\"

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Finish Options	Voltage
☐ L173H32L.12L Plug-in Version	☐ KS: Black / Brass	☐ 120V LTE
☐ L173H80M.12L Hardwire Version	☐ WS: White / Brass	
	☐ BS: Blue / Brass	
	☐ GS: Green / Brass	
	☐ PS: Rose / Brass	
	☐ RS: Red / Brass	

