


### INSTALLATION SURFACE MOUNTED OVER JUNCTION BOX - DIMMING LTE OR 0-10V

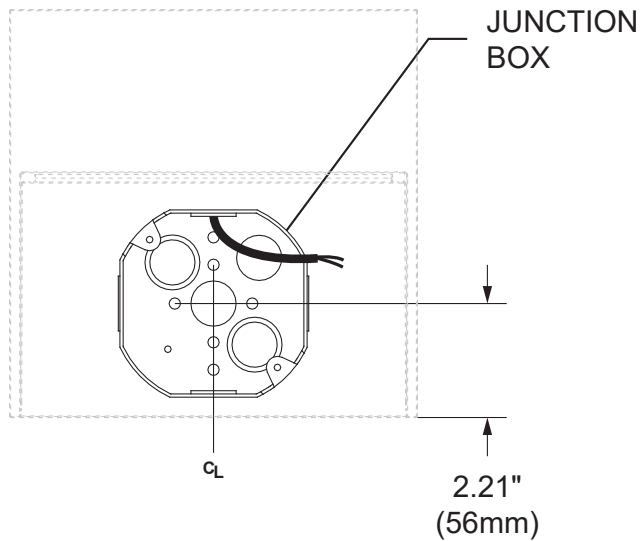


**A**

PREPARE INSTALLATION SURFACE USING THE DIMENSIONS ABOVE.

**B**

UNSCREW THE SCREWS WITH AN ALLEN KEY TO REMOVE THE FIXTURE COVER FROM THE FIXTURE BASE.

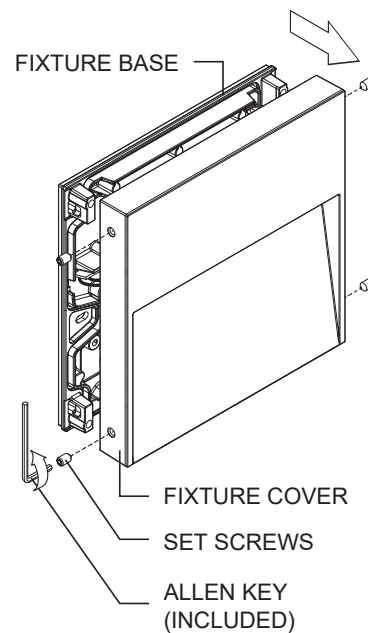

### INSTALLATION SURFACE MOUNTED OVER JUNCTION BOX - DIMMING LTE OR 0-10V

**C**



PASS THE WIRES THROUGH THE MOUNTING PLATE.

MAKE WIRE CONNECTIONS BETWEEN FIXTURE AND DRIVER BY FOLLOWING THE WIRING DIAGRAMS DEPENDS ON THE DIMMING OPTION.

PUT DRIVER IN THE JUNCTION BOX.


INSTALL THE MOUNTING PLATE ON THE JUNCTION BOX.

SECURE THE FIXTURE BASE TO THE MOUNTING PLATE USING THE SCREWS.

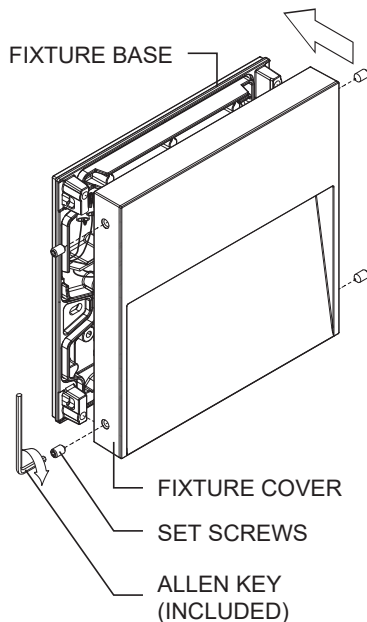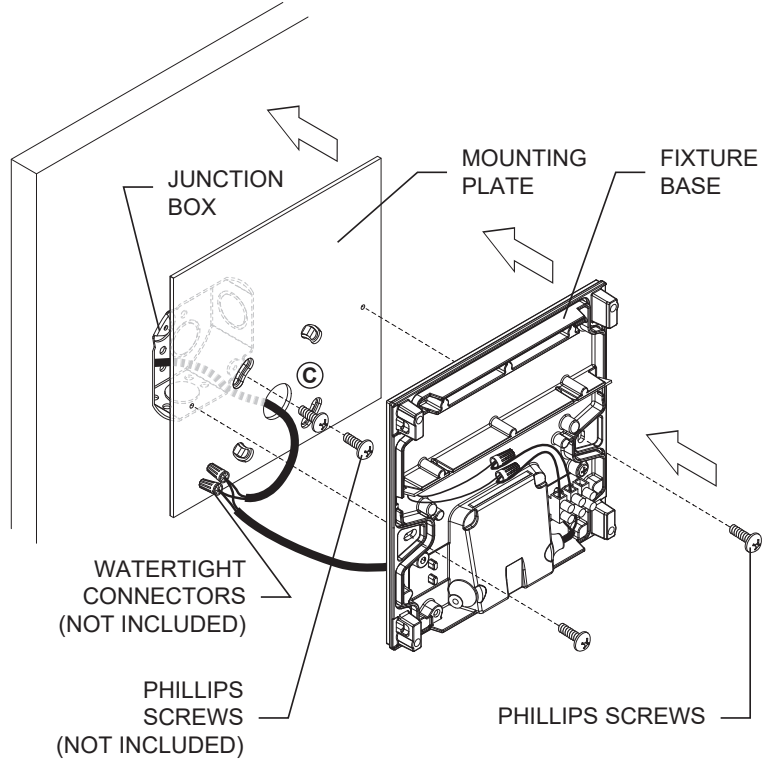


#### WIRING DIAGRAM

**DIMMING (LTE)  
TRIAC/ELV (120V ONLY)**



**DIMMING 0-10V  
120-277V**



\*Junction box for reference only

**D**

FASTEN THE FIXTURE COVER TO THE FIXTURE BASE WITH THE SET SCREWS USING AN ALLEN KEY.