


STIX™ ROUND

BOLLARD

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 04/22/24

STIX™ ROUND

BOLLARD

TYPE:

PROJECT NAME:

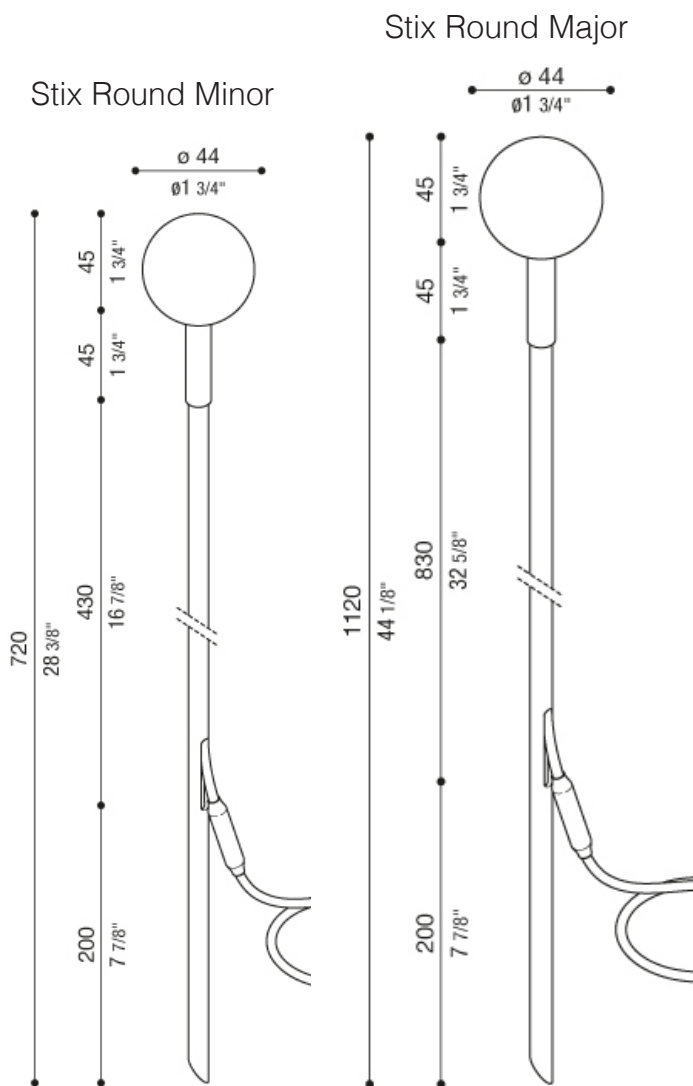

Technical information:

Installation:	Ground
Material:	Fibreglass
Treatment:	Anodization
Diffuser type:	PMMA
CRI:	>80
LB Factor:	L80B20 - 50.000h
Power consumption [Watt]	1.5
Source Lumen:	140 lm
Delivered Lumen:	85 lm
Type of protection:	IP66

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Base Options*	LED	Dimming Options
☐ L53LT14910: H 720mm (28 3/8")	☐ BL: Black Only	☐ Steel Base	☐ 2700K	☐ 120V LTE
☐ L53LT14911: H 1120mm (44 1/8")	☐ BNBR: Brown with Brass	☐ Pole only for ground recessed	☐ 3000K	☐ 120V 0-10V
	☐ BLBR: Black with Brass		☐ 4000K	☐ 277V 0-10V
	☐ GRBR: Green with Brass			



*See details on the next page.


Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 04/22/24


STIX™ ROUND
BOLLARD

TYPE:
PROJECT NAME:

Concrete base for one

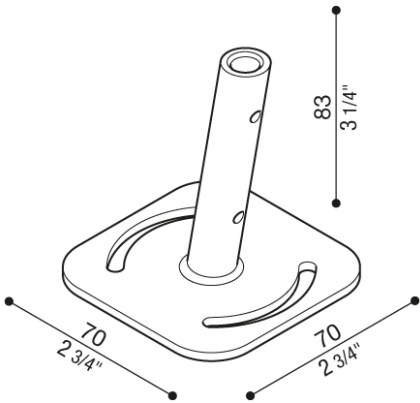

Photometric curves

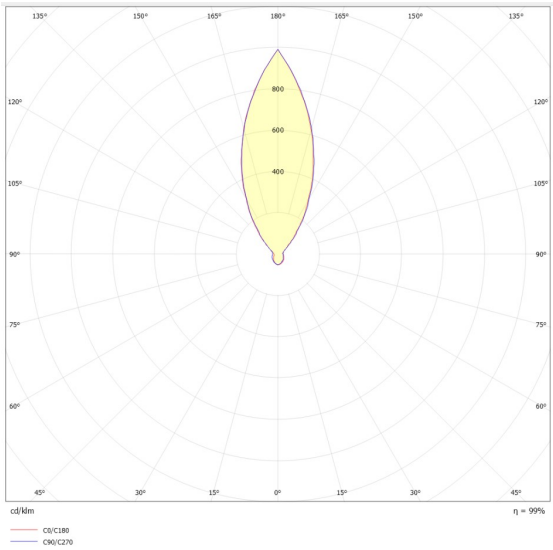

SPECIFICATION SHEET