


STIX™
BOLLARD

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

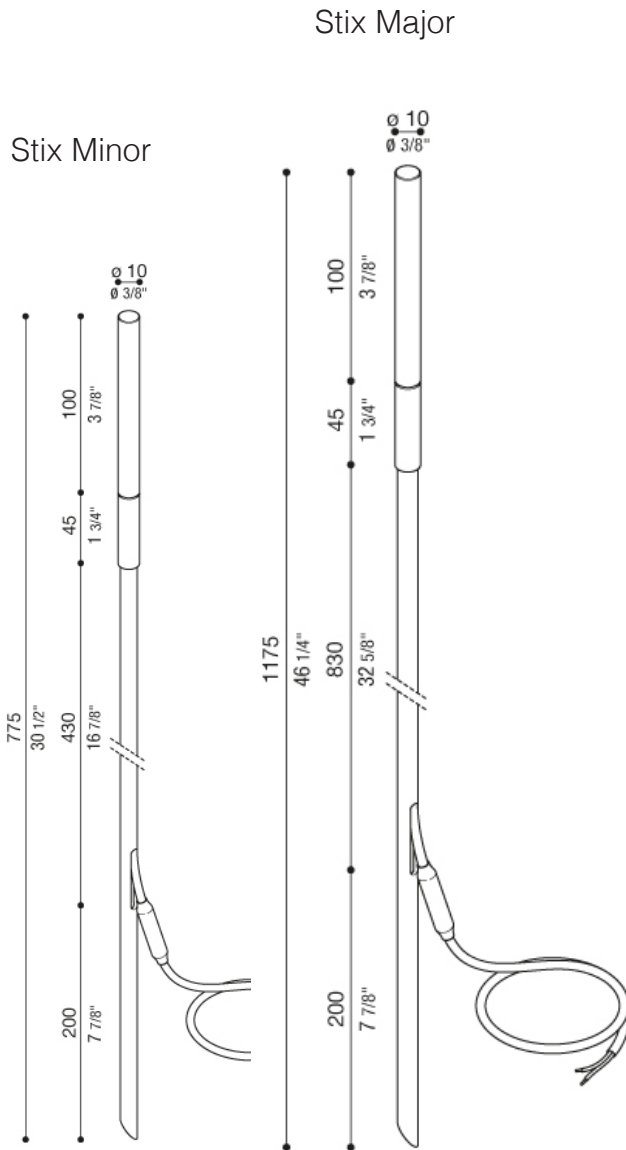

Technical information:

Installation:	Ground
Material:	Fibreglass
Treatment:	Anodization
Diffuser type:	PMMA
CRI:	>80
LB Factor:	L80B20 - 50.000h
Power consumption [Watt]	1.5
Source Lumen:	140 lm
Delivered Lumen:	68 lm
Type of protection:	IP68


ORDERING INFO

Model (Order Code)	Structure Finish	Base Options*	LED	Dimming Options
☐ L53LT14900: H 775mm (30 1/2")	☐ BL: Black Only	☐ Steel Base	☐ 2700K	☐ 120V LTE
☐ L53LT14901: H 1175mm (46 1/4")	☐ BNBR: Brown with Brass	☐ Pole only for ground recessed	☐ 3000K	☐ 120V 0-10V
	☐ BLBR: Black with Brass		☐ 4000K	☐ 277V 0-10V
	☐ GRBR: Green with Brass			



*See details on the next page.

Concrete base for one

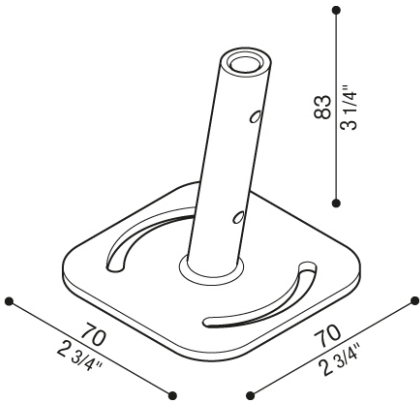

Photometric curves

