TKO™ ROUND

BOLLARD

TYPE:

PROJECT NAME:

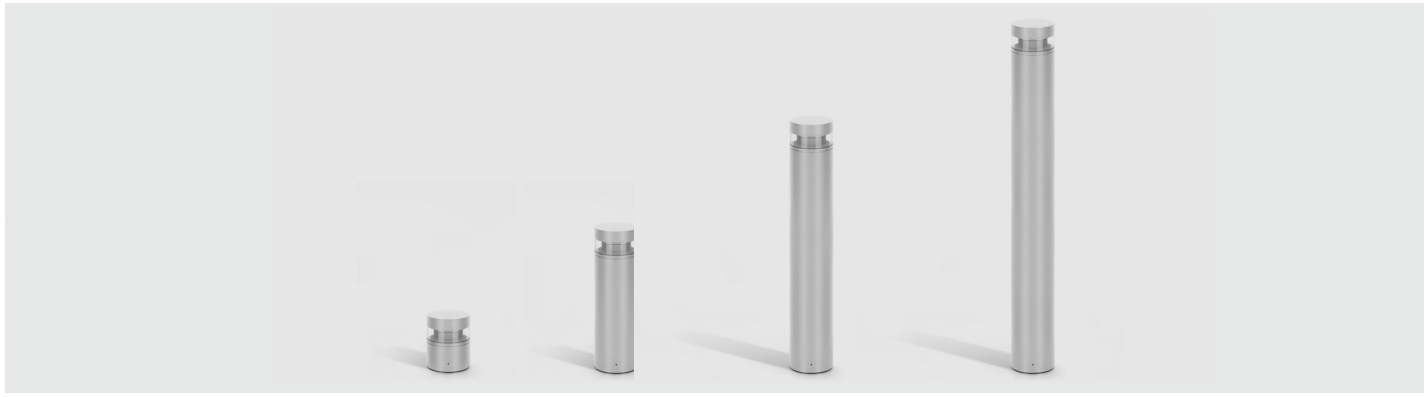

SPECIFICATION SHEET

TKO™ ROUND

BOLLARD - H150

TYPE:

PROJECT NAME:

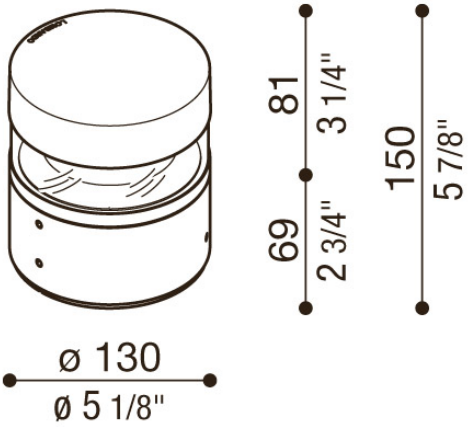

Technical information:

Installation:	**Ground**
Material:	**Aluminum**
Treatment:	**Sea Treatment**
Diffuser type:	**PMMA**
CRI:	**>80**
LB Factor:	**L80B20 - 50.000h**
Power consumption [Watt]	**14**
Source Lumen:	**1860 lm**
Delivered Lumen:	**650 lm**
Type of protection:	**IP66**

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options*	LED	Dimming Options
◯ L53LL1280 H150	◯ AN: Anthracite RAL7021	◯ 360°	◯ 2200K	◯ 120V LTE
	◯ GR: Grey RAL9006	◯ 270°	◯ 2700K	◯ 120V 0-10V
	◯ WH: White RAL9010	◯ 180°	◯ 3000K	◯ 277V 0-10V
	◯ CO: Corten		◯ 4000K	

Intertek

*See details on the next page.

TKO™ ROUND

BOLLARD - H150

TYPE:

PROJECT NAME:

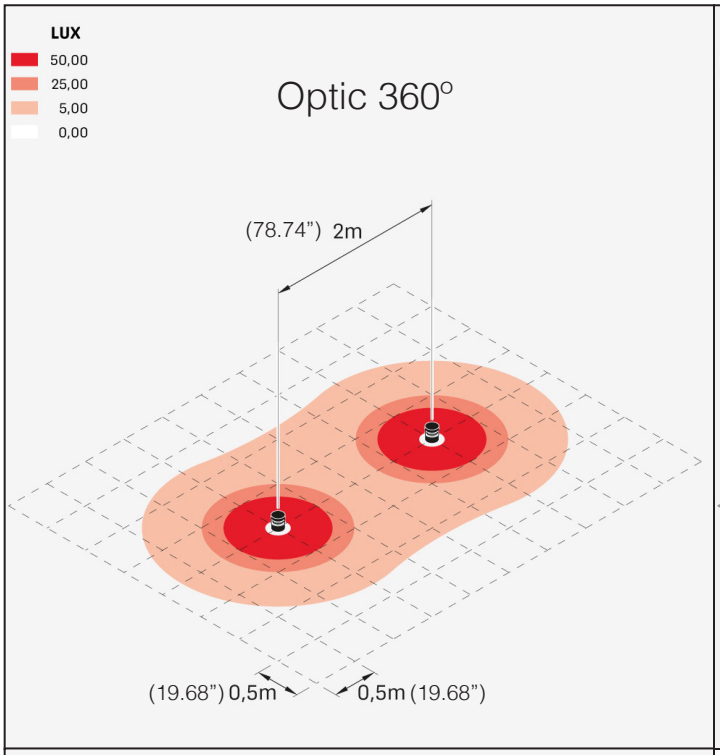

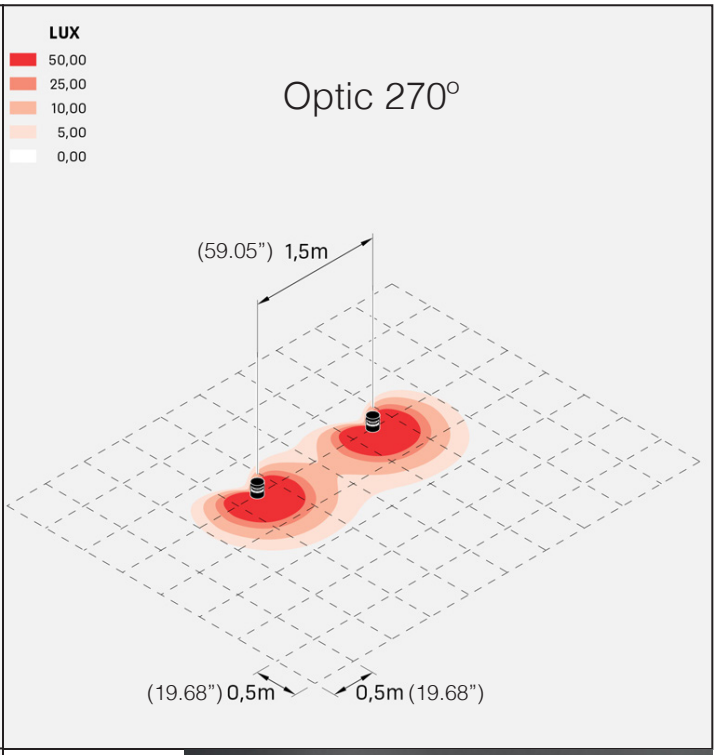

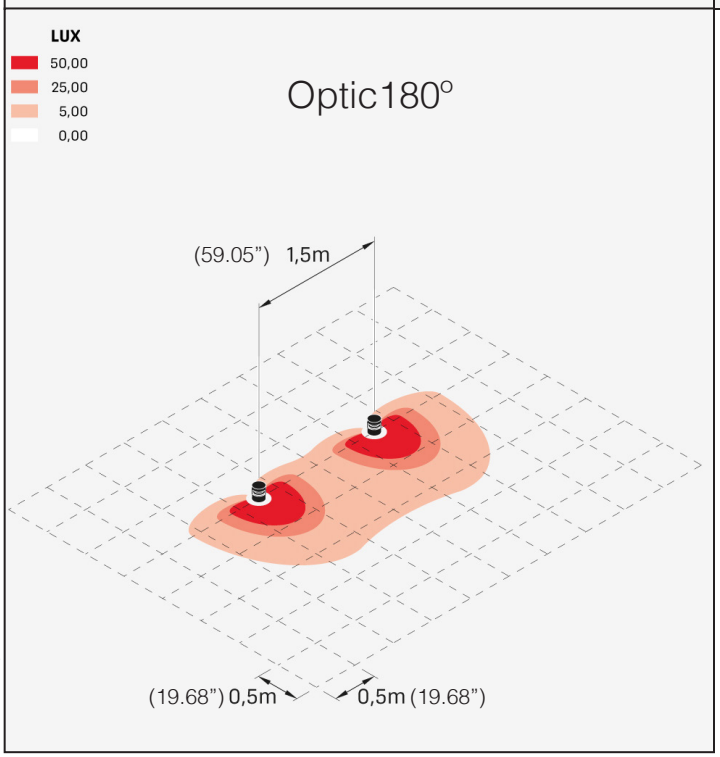

360°

270°

180°

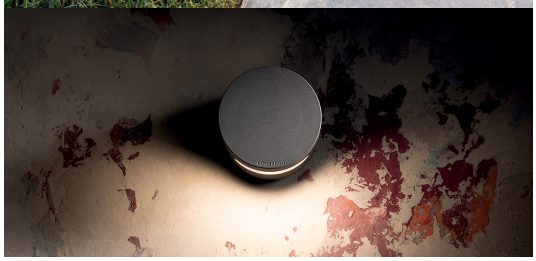

SPECIFICATION SHEET

TKO™ ROUND

BOLLARD - H400

TYPE:

PROJECT NAME:

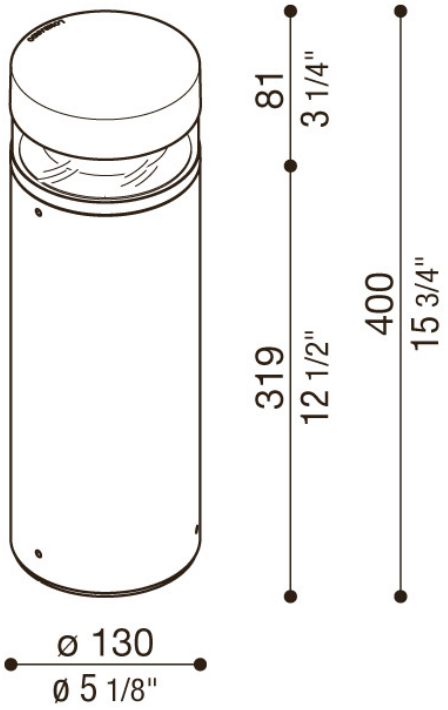

Technical information:

Installation:	**Ground**
Material:	**Aluminum**
Treatment:	**Sea Treatment**
Diffuser type:	**PMMA**
CRI:	**>80**
LB Factor:	**L80B20 - 50.000h**
Power consumption [Watt]	**14**
Source Lumen:	**1860 lm**
Delivered Lumen:	**650 lm**
Type of protection:	**IP66**

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options*	LED	Dimming Options
◯ L53LL1280 H400	◯ AN: Anthracite RAL7021	◯ 360°	◯ 2200K	◯ 120V LTE
	◯ GR: Grey RAL9006	◯ 270°	◯ 2700K	◯ 120V 0-10V
	◯ WH: White RAL9010	◯ 180°	◯ 3000K	◯ 277V 0-10V
	◯ CO: Corten		◯ 4000K	

Intertek

*See details on the next page.

TKO™ ROUND

BOLLARD - H400

TYPE:

PROJECT NAME:

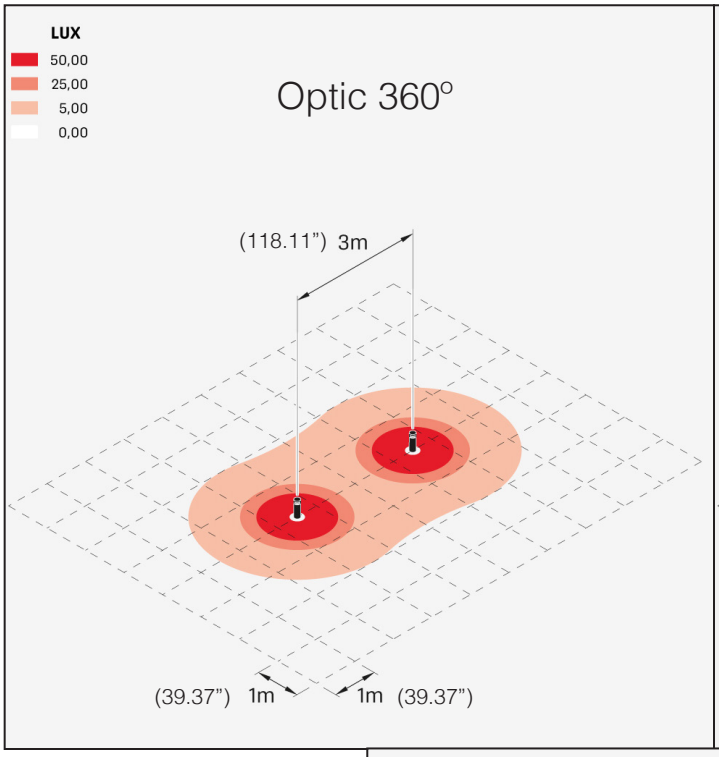

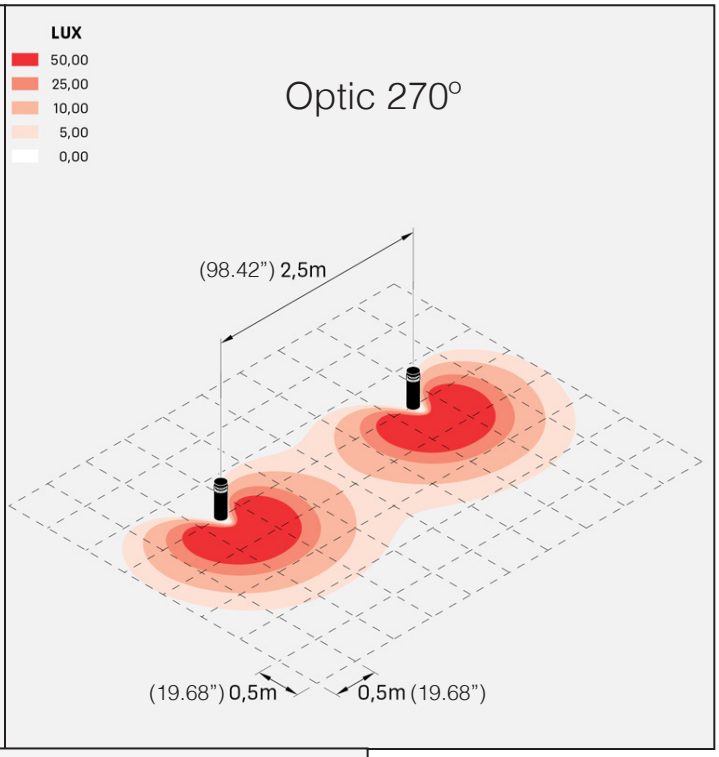

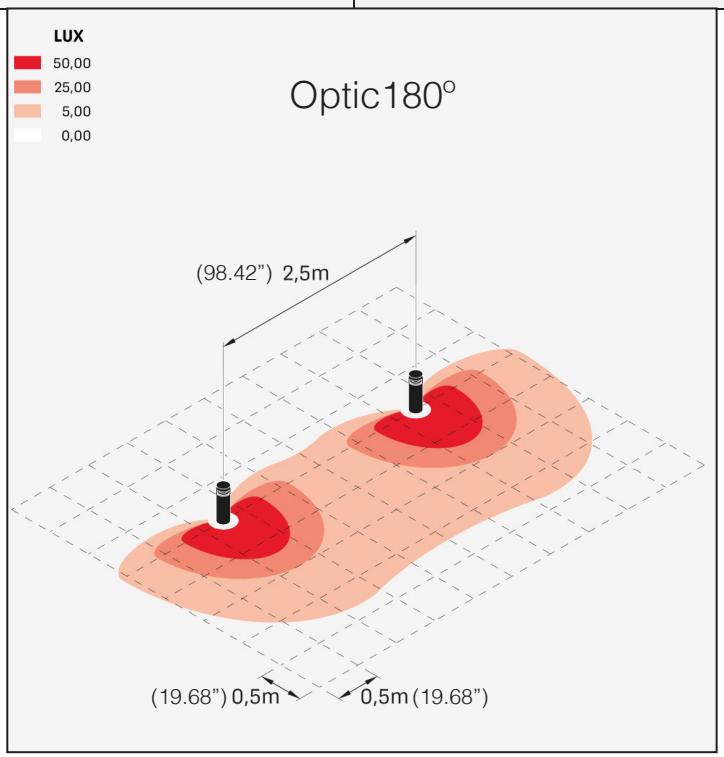

SPECIFICATION SHEET

TKO™ ROUND

BOLLARD - H700

TYPE:

PROJECT NAME:

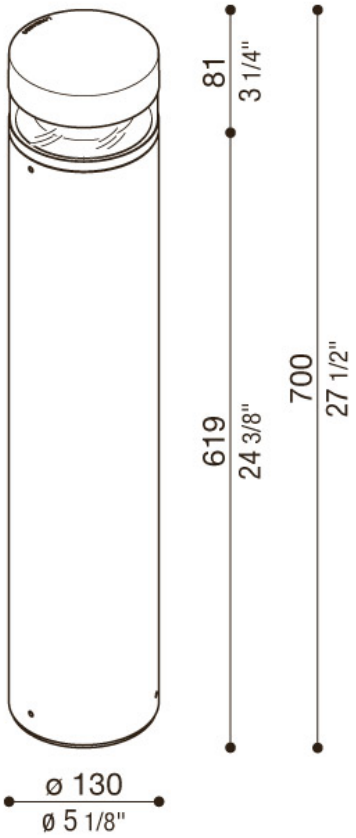

Technical information:

Installation:	Ground
Material:	Aluminum
Treatment:	Sea Treatment
Diffuser type:	PMMA
CRI:	>80
LB Factor:	L80B20 - 50.000h
Power consumption [Watt]	14
Source Lumen:	1860 lm
Delivered Lumen:	650 lm
Type of protection:	IP66

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options*	LED	Dimming Options
◯ L53LL1280 H700	◯ AN: Anthracite RAL7021	◯ 360°	◯ 2200K	◯ 120V LTE
	◯ GR: Grey RAL9006	◯ 270°	◯ 2700K	◯ 120V 0-10V
	◯ WH: White RAL9010	◯ 180°	◯ 3000K	◯ 277V 0-10V
	◯ CO: Corten		◯ 4000K	

Intertek

*See details on the next page.

TKO™ ROUND

BOLLARD - H700

TYPE:

PROJECT NAME:

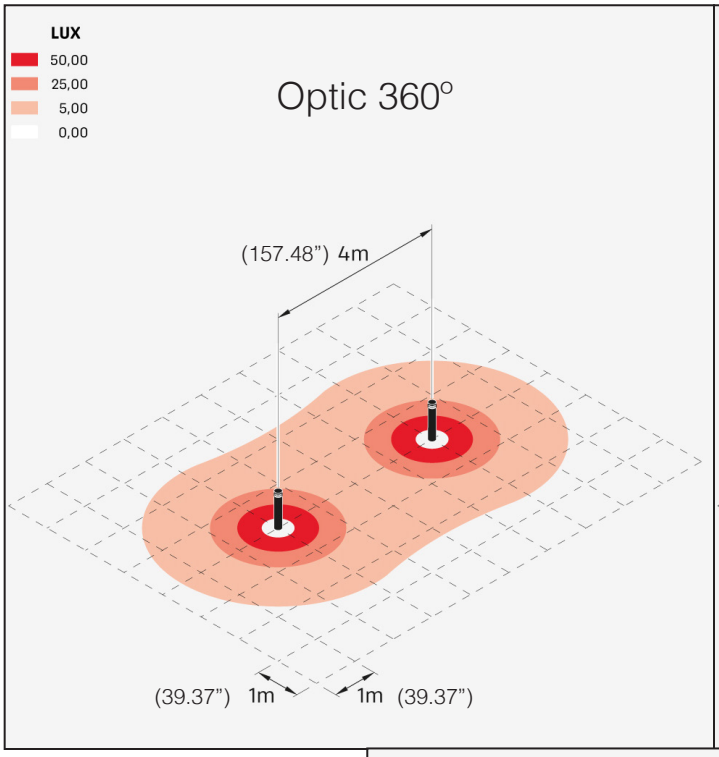

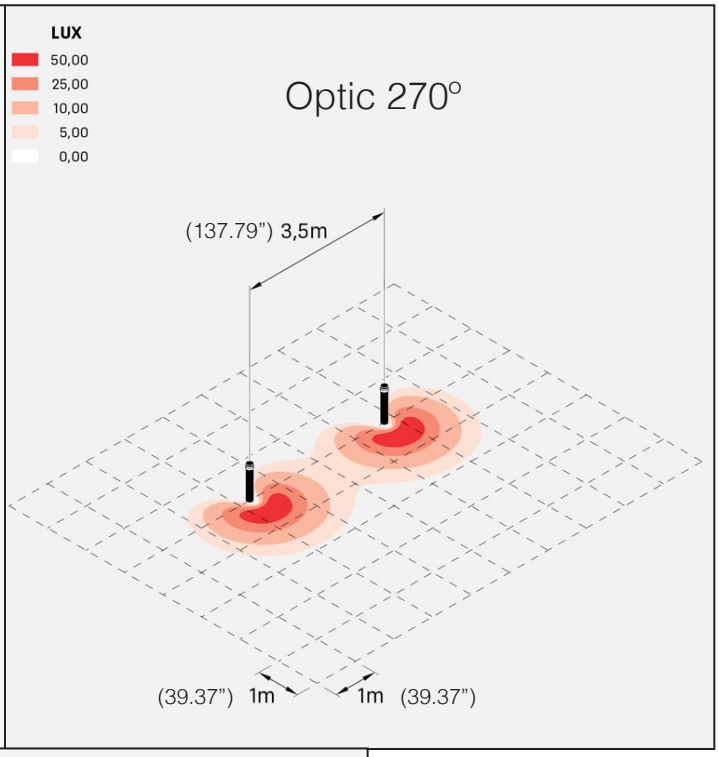

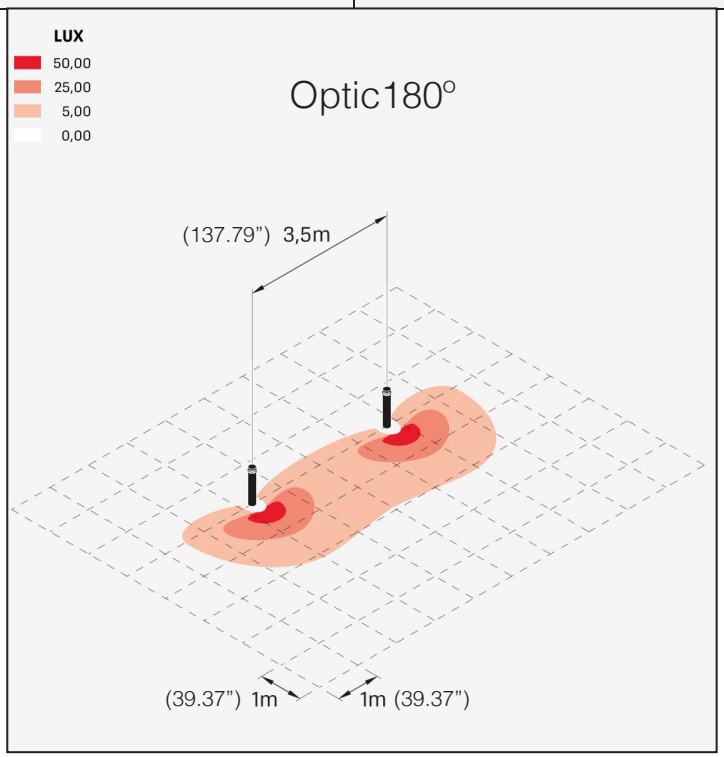

SPECIFICATION SHEET

TKO™ ROUND

BOLLARD - H1000

TYPE:

PROJECT NAME:

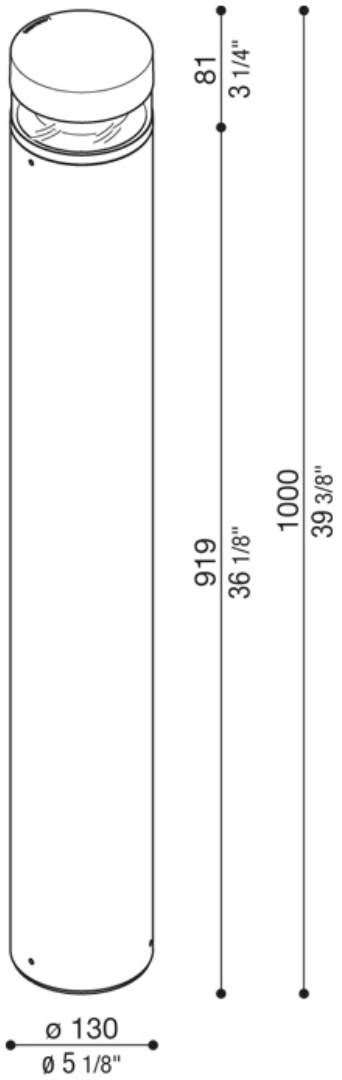

Technical information:

Installation:	Ground
Material:	Aluminum
Treatment:	Sea Treatment
Diffuser type:	PMMA
CRI:	>80
LB Factor:	L80B20 - 50.000h
Power consumption [Watt]	14
Source Lumen:	1860 lm
Delivered Lumen:	650 lm
Type of protection:	IP66

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options*	LED	Dimming Options
◯ L53LL1280 H1000	◯ AN: Anthracite RAL7021	◯ 360°	◯ 2200K	◯ 120V LTE
	◯ GR: Grey RAL9006	◯ 270°	◯ 2700K	◯ 120V 0-10V
	◯ WH: White RAL9010	◯ 180°	◯ 3000K	◯ 277V 0-10V
	◯ CO: Corten		◯ 4000K	

Intertek

*See details on the next page.

TKO™ ROUND

BOLLARD - H1000

TYPE:

PROJECT NAME:

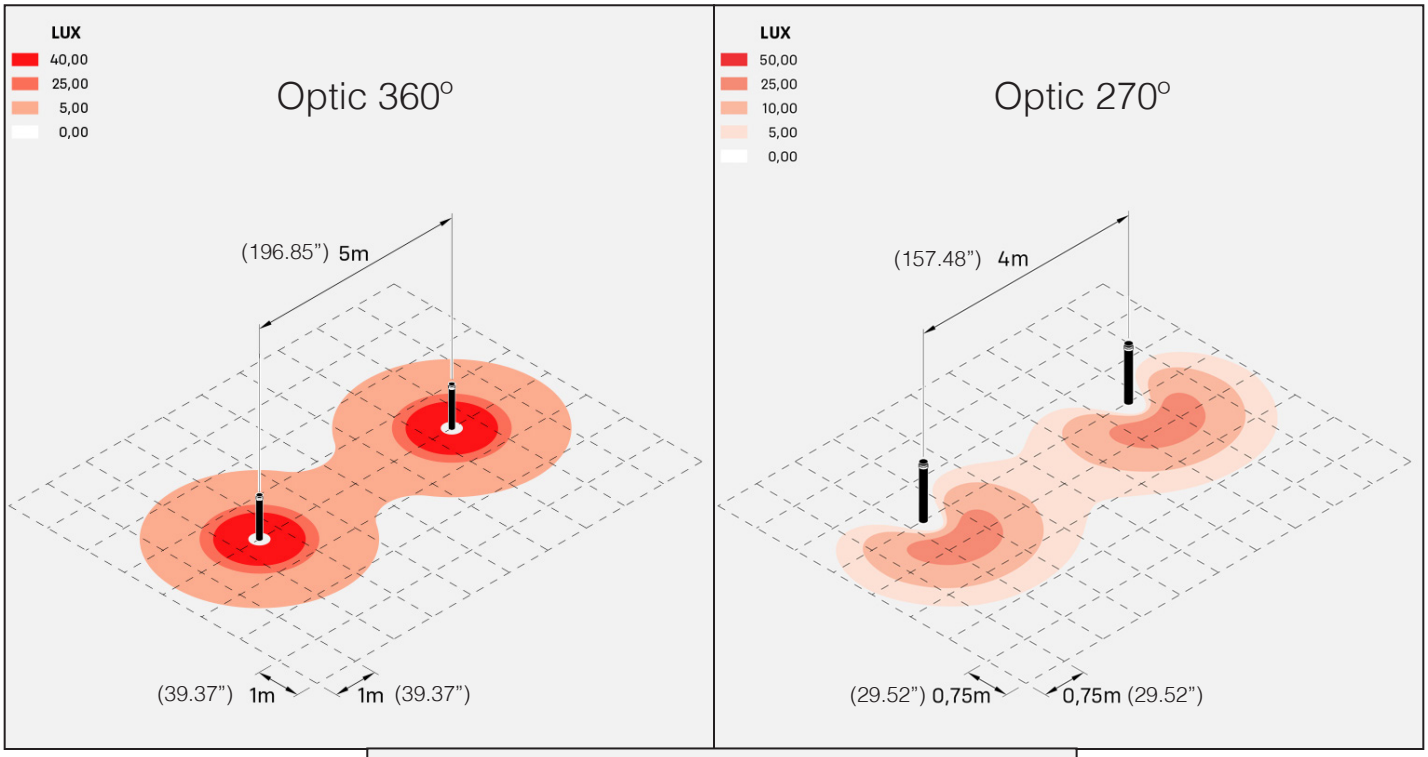

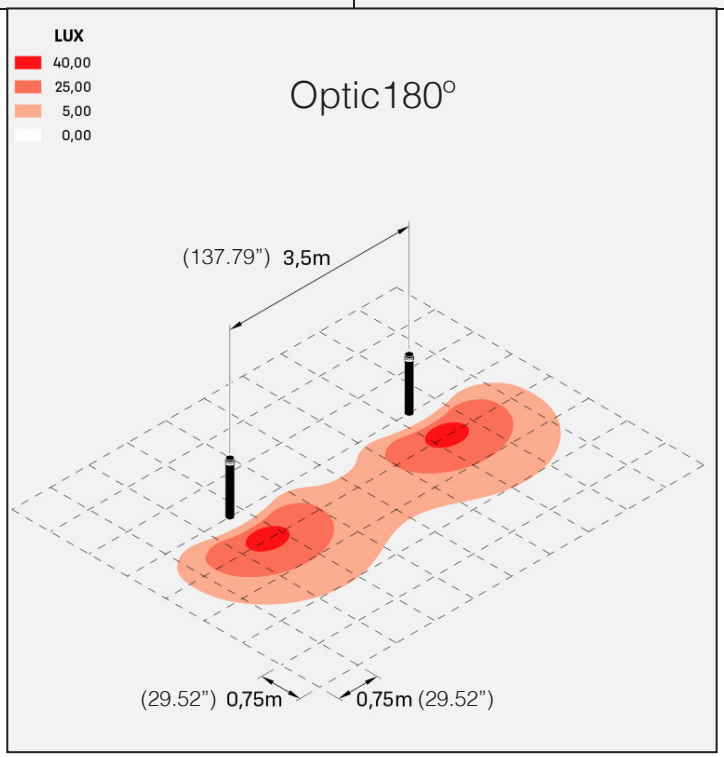

SPECIFICATION SHEET