


TKO™ SQUARE
BOLLARD

TYPE:
PROJECT NAME:

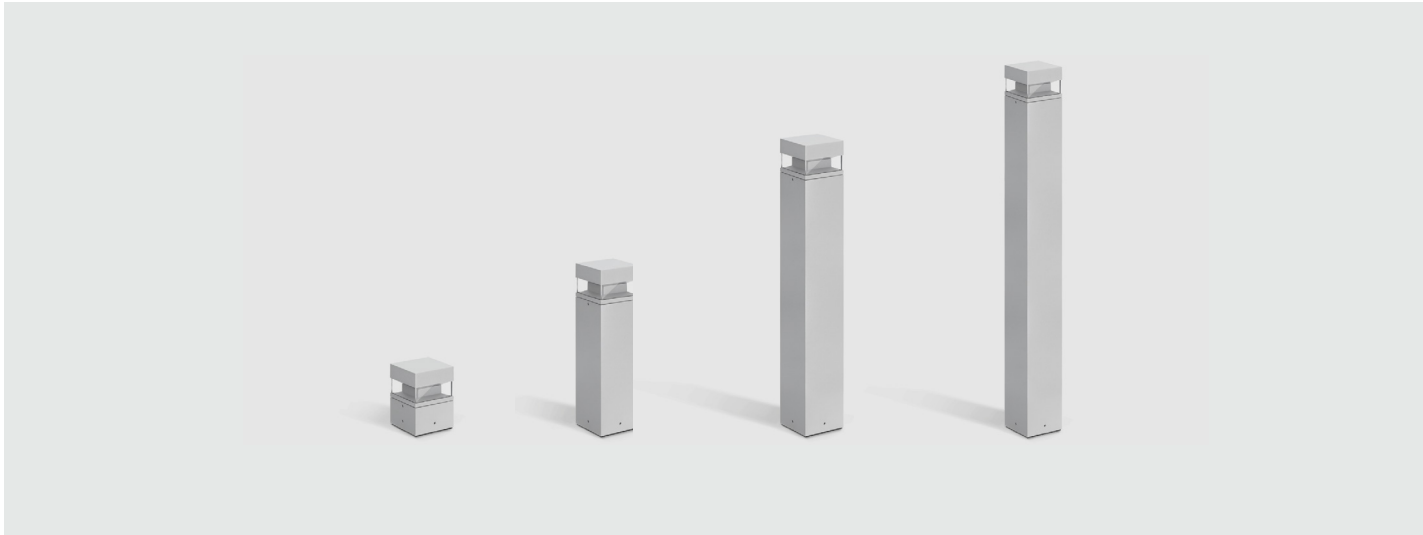


SPECIFICATION SHEET

TKO™ SQUARE

BOLLARD - H150

TYPE:

PROJECT NAME:

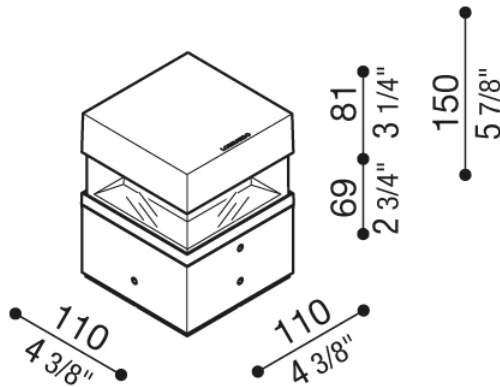

Technical information:

Installation:	Ground
Material:	Aluminum
Treatment:	Sea Treatment
Diffuser type:	PMMA
CRI:	>80
LB Factor:	L80B20 - 50.000h
Power consumption [Watt]	14
Source Lumen:	1920 lm
Delivered Lumen:	630 lm
Type of protection:	IP66

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options*	LED	Dimming Options
☐ L53LL12810	☐ AN: Anthracite RAL7021 ☐ GR: Grey RAL9006 ☐ WH: White RAL9010 ☐ CO: Corten	☐ Four Side Optic ☐ Two Side Optic ☐ One Side Optic	☐ 2200K ☐ 2700K ☐ 3000K ☐ 4000K	☐ 120V LTE ☐ 120V 0-10V ☐ 277V 0-10V



*See details on the next page.

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 04/22/24

TKO™ SQUARE

BOLLARD - H150

TYPE:

PROJECT NAME:

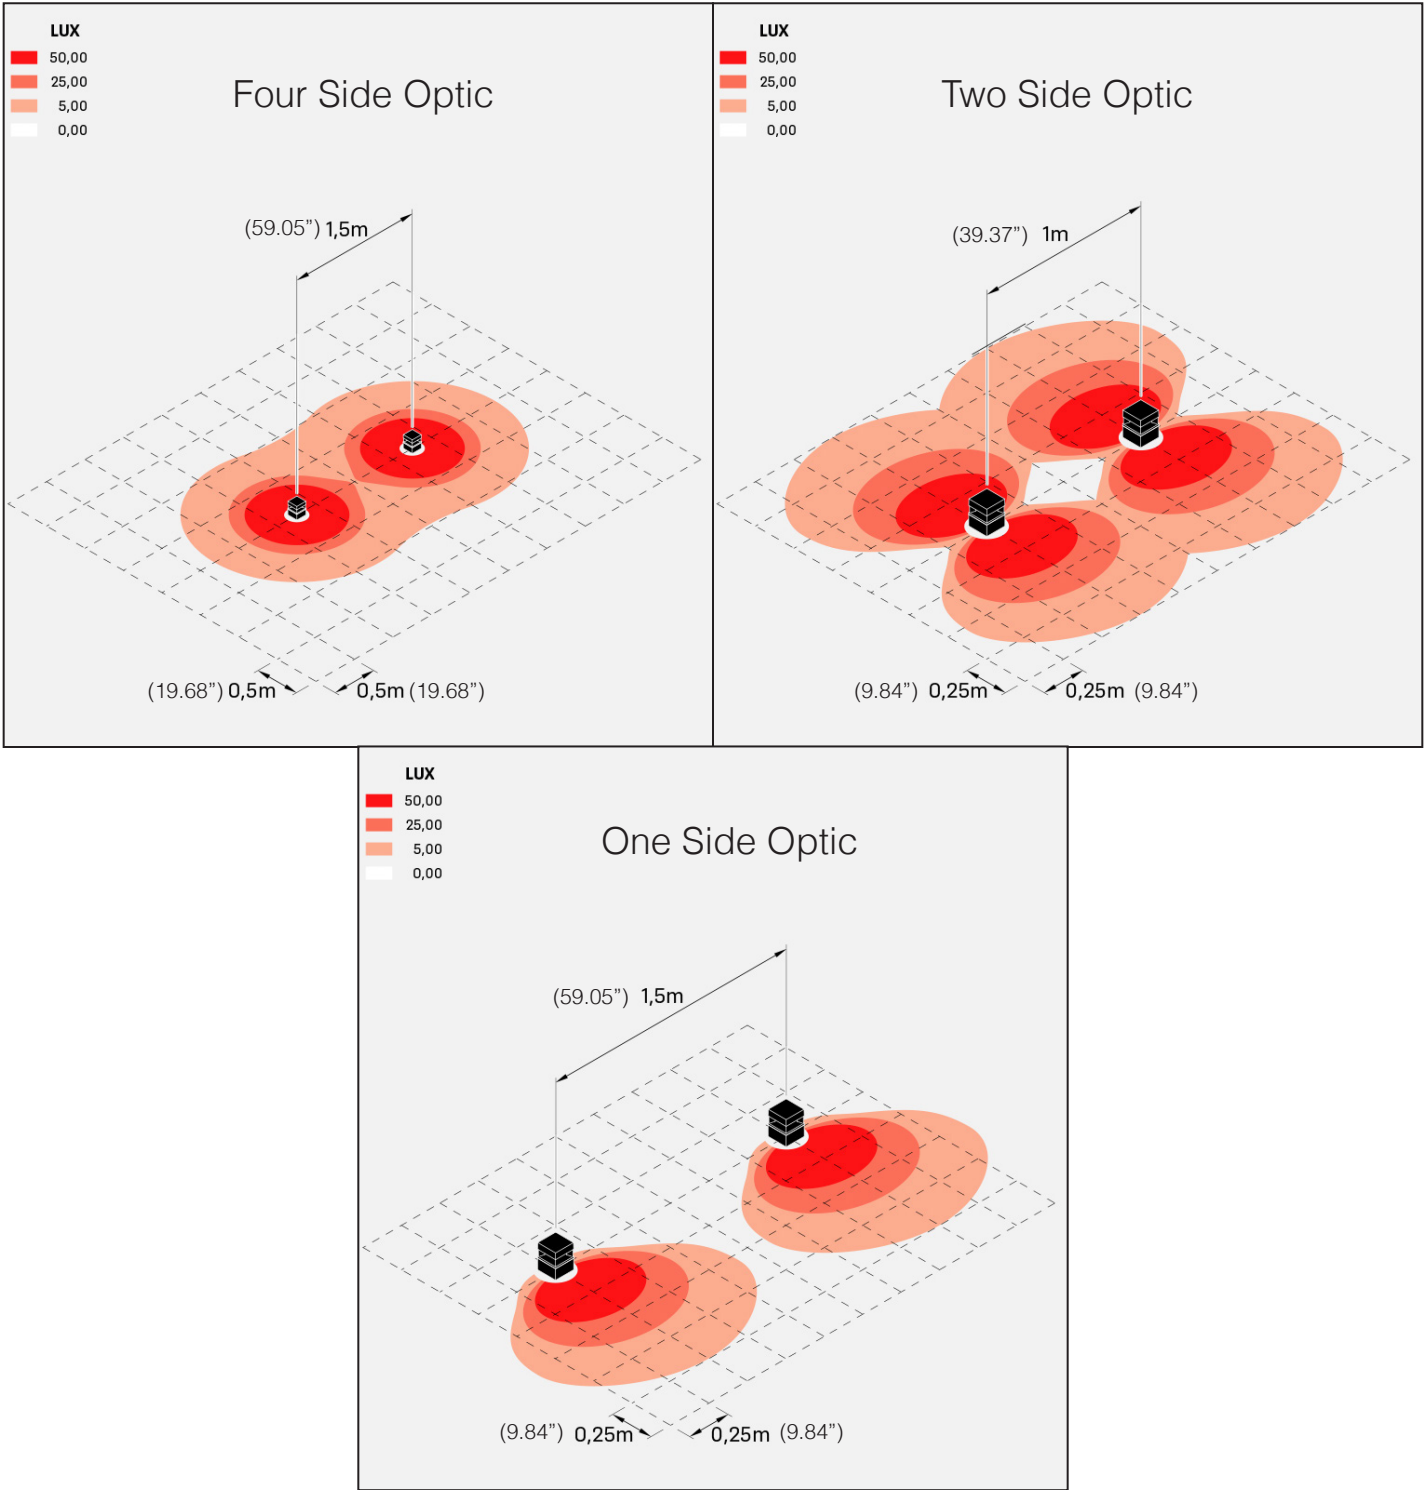


SPECIFICATION SHEET

TKO™ SQUARE

BOLLARD - H400

TYPE:

PROJECT NAME:

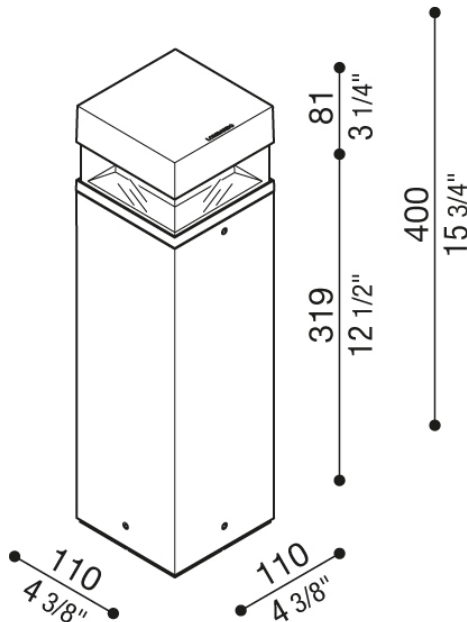

Technical information:

Installation:	Ground
Material:	Aluminum
Treatment:	Sea Treatment
Diffuser type:	PMMA
CRI:	>80
LB Factor:	L80B20 - 50.000h
Power consumption [Watt]	14
Source Lumen:	1920 lm
Delivered Lumen:	630 lm
Type of protection:	IP66

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options*	LED	Dimming Options
☐ L53LL12813	☐ AN: Anthracite RAL7021 ☐ GR: Grey RAL9006 ☐ WH: White RAL9010 ☐ CO: Corten	☐ Four Side Optic ☐ Two Side Optic ☐ One Side Optic	☐ 2200K ☐ 2700K ☐ 3000K ☐ 4000K	☐ 120V LTE ☐ 120V 0-10V ☐ 277V 0-10V



*See details on the next page.

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 04/22/24

TKO™ SQUARE

BOLLARD - H400

TYPE:

PROJECT NAME:

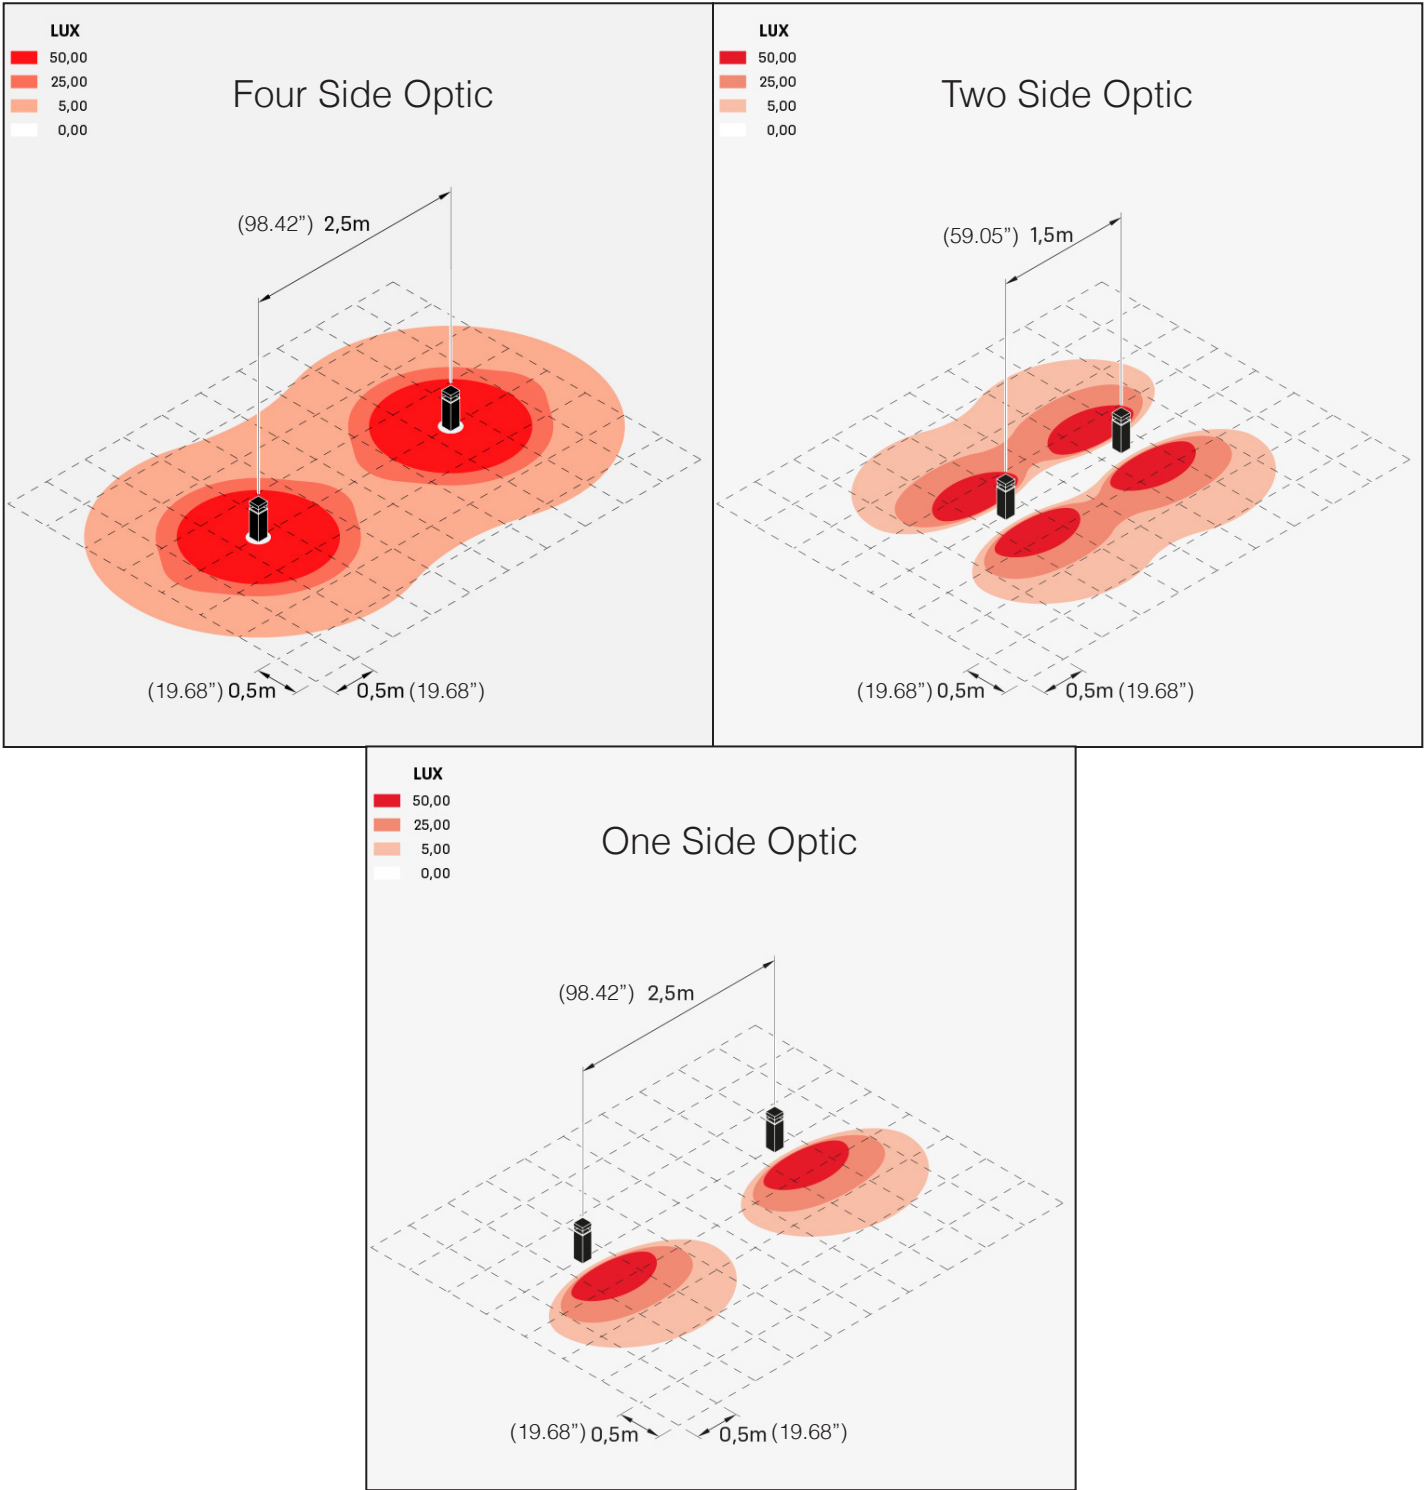


SPECIFICATION SHEET

TKO™ SQUARE

BOLLARD - H700

TYPE:

PROJECT NAME:

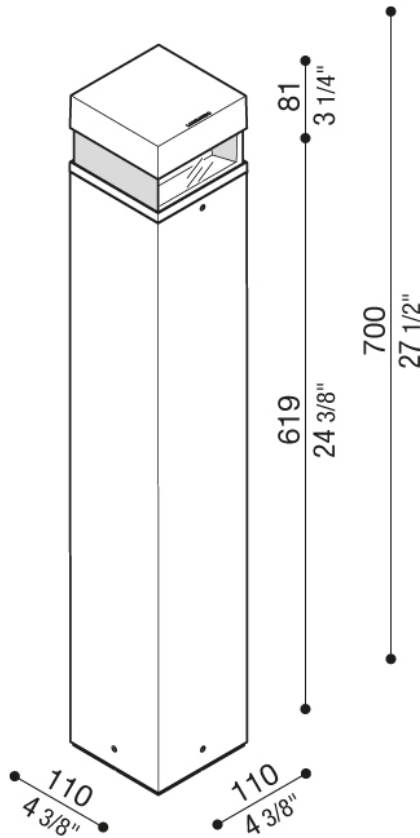

Technical information:

Installation:	Ground
Material:	Aluminum
Treatment:	Sea Treatment
Diffuser type:	PMMA
CRI:	>80
LB Factor:	L80B20 - 50.000h
Power consumption [Watt]	14
Source Lumen:	1920 lm
Delivered Lumen:	630 lm
Type of protection:	IP66

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options*	LED	Dimming Options
☐ L53LL12816	☐ AN: Anthracite RAL7021 ☐ GR: Grey RAL9006 ☐ WH: White RAL9010 ☐ CO: Corten	☐ Four Side Optic ☐ Two Side Optic ☐ One Side Optic	☐ 2200K ☐ 2700K ☐ 3000K ☐ 4000K	☐ 120V LTE ☐ 120V 0-10V ☐ 277V 0-10V



*See details on the next page.

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 04/22/24

TKO™ SQUARE

BOLLARD - H700

TYPE:

PROJECT NAME:

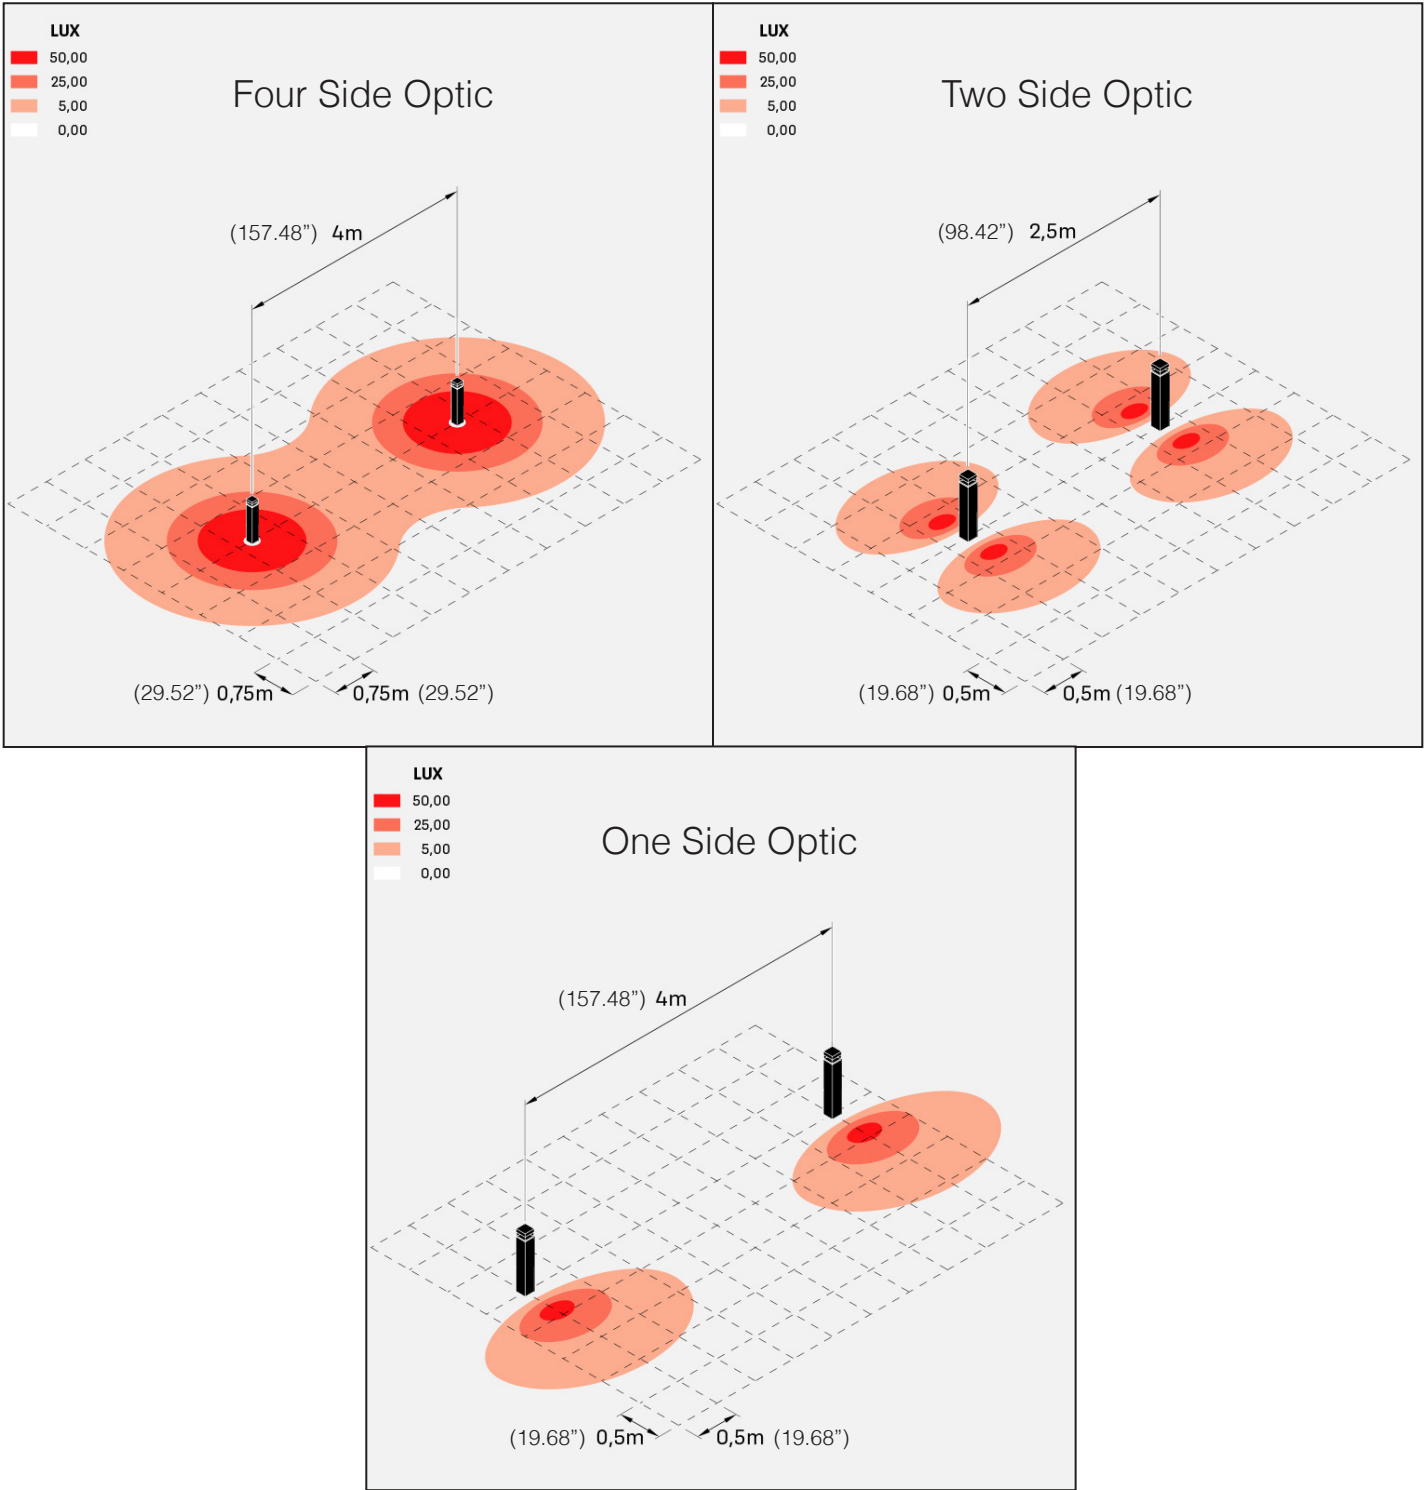


SPECIFICATION SHEET

TKO™ SQUARE

BOLLARD - H1000

TYPE:

PROJECT NAME:

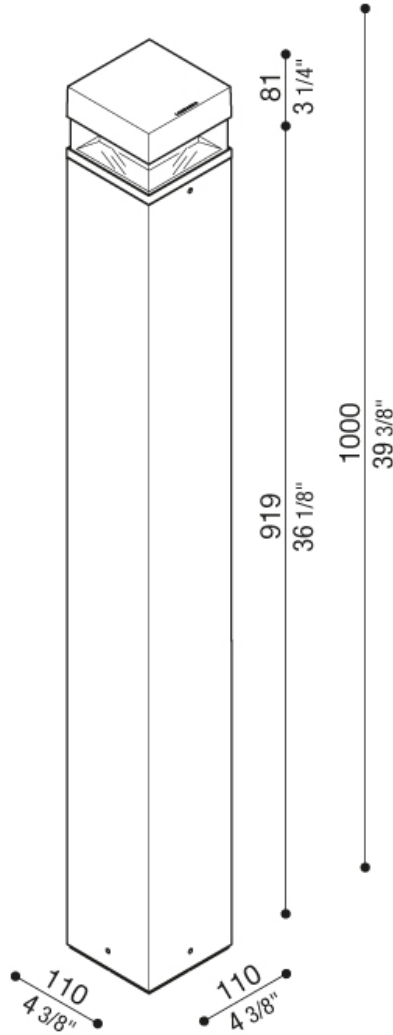

Technical information:

Installation:	Ground
Material:	Aluminum
Treatment:	Sea Treatment
Diffuser type:	PMMA
CRI:	>80
LB Factor:	L80B20 - 50.000h
Power consumption [Watt]	14
Source Lumen:	1920 lm
Delivered Lumen:	630 lm
Type of protection:	IP66

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options*	LED	Dimming Options
☐ L53LL12819	☐ AN: Anthracite RAL7021 ☐ GR: Grey RAL9006 ☐ WH: White RAL9010 ☐ CO: Corten	☐ Four Side Optic ☐ Two Side Optic ☐ One Side Optic	☐ 2200K ☐ 2700K ☐ 3000K ☐ 4000K	☐ 120V LTE ☐ 120V 0-10V ☐ 277V 0-10V



*See details on the next page.

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 04/22/24

TKO™ SQUARE

BOLLARD - H1000

TYPE:

PROJECT NAME:

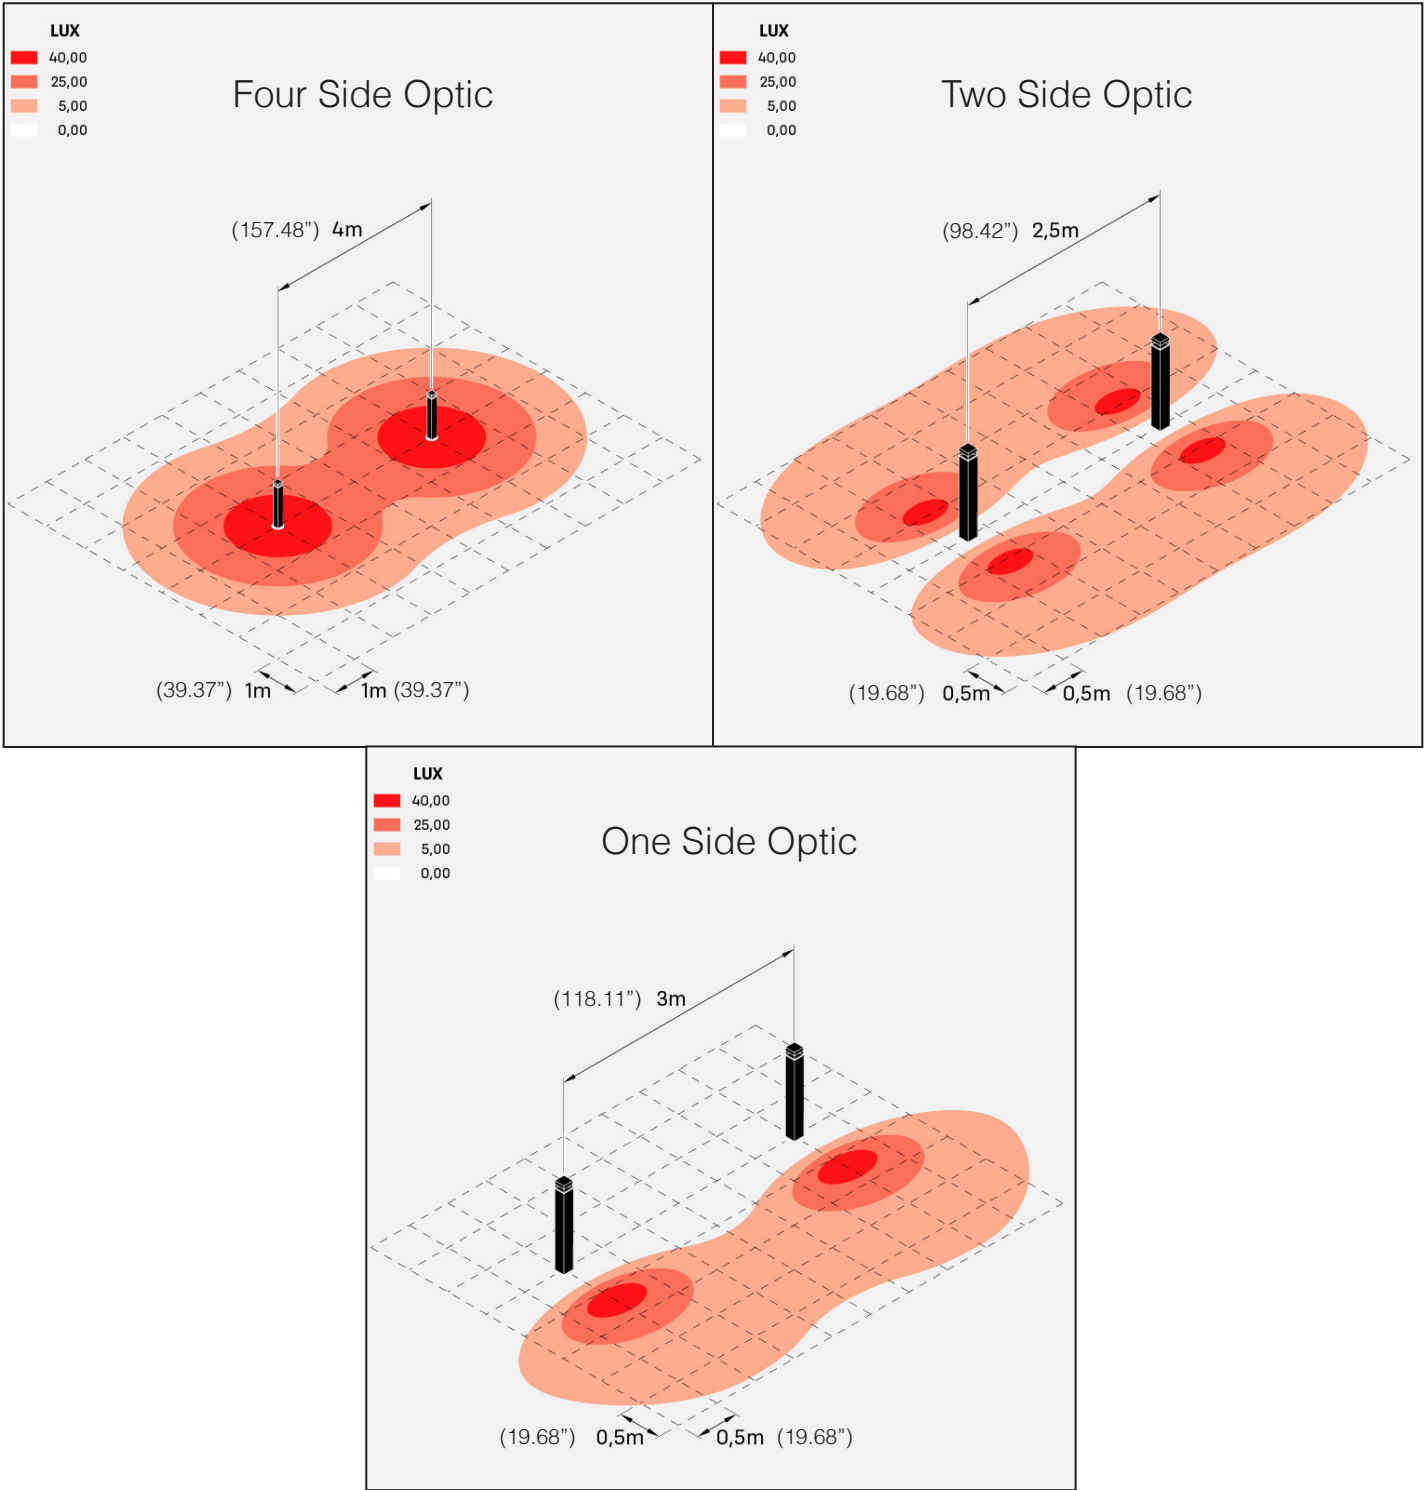

SPECIFICATION SHEET