

POP HOST™ 80

SUSPENSION

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 04/15/25

POP HOST™ 80

SUSPENSION


TYPE:

PROJECT NAME:



☐	Up	Down	Diffuser color
KS			Black/Brass
WS			White/Brass
BS			Blue/Brass
GS			Green/Brass
PS			Rose/Brass
RS			Red/Brass

Power		E26
Luminaire Light Flux	2700K	470 lm

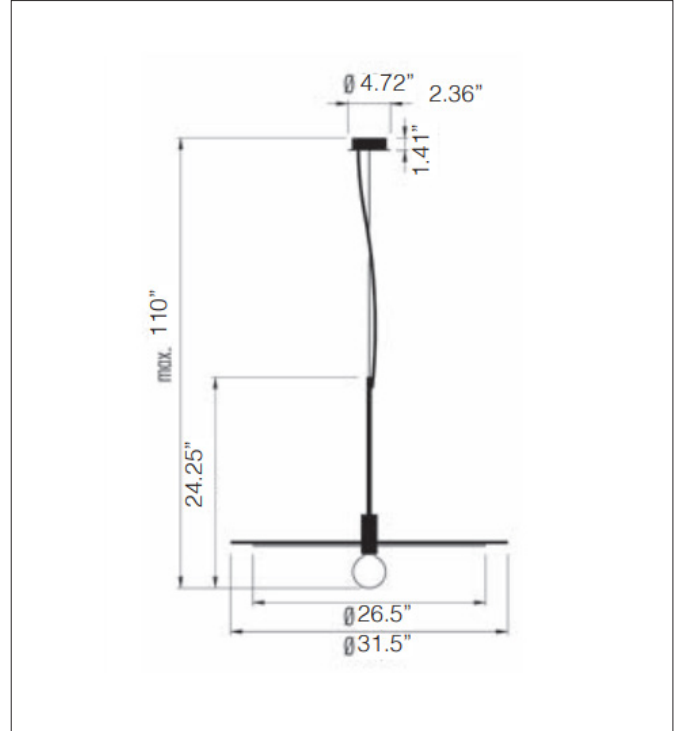

Color rendering: CRI >80

Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V

Mounting: Supplied with 82.67" (2100mm) power cable and canopy. To be installed on a standard octagonal junction box.
Custom cable length on request (Please specify).

ORDERING INFO

Model (Order Code)	Finish Options	Driver Options
☐ L173H80C.12L Ø31.5"	☐ KS: Black / Brass ☐ WS: White / Brass ☐ BS: Blue / Brass ☐ GS: Green / Brass ☐ PS: Rose / Brass ☐ RS: Red / Brass	☐ 120V LTE

Fixture comes with a 4" backplate that mounts to a standard junction box.



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 04/15/25

POP HOST™ 80

SUSPENSION - SWAG CABLE

TYPE:

PROJECT NAME:

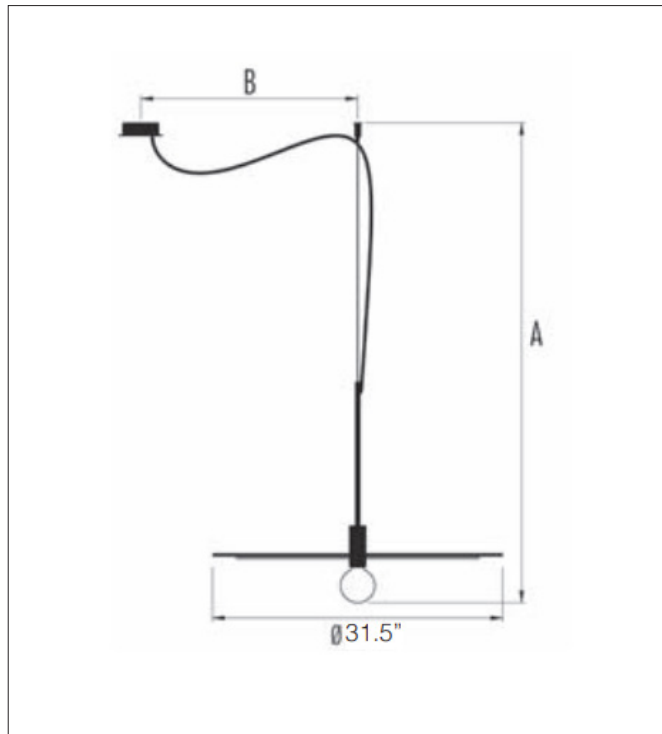

☐	Up	Down	Diffuser color
KS			Black/Brass
WS			White/Brass
BS			Blue/Brass
GS			Green/Brass
PS			Rose/Brass
RS			Red/Brass

Power		E26
Luminaire Light Flux	2700K	470 lm

Color rendering: CRI >80

Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V

Mounting:
To be installed on a standard octagonal junction box.
Custom cable length on request (Please specify).

ORDERING INFO

Model (Order Code)	Finish Options	Driver Options
☐ L173H80D.12L Ø31.5"	☐ KS: Black / Brass ☐ WS: White / Brass ☐ BS: Blue / Brass ☐ GS: Green / Brass ☐ PS: Rose / Brass ☐ RS: Red / Brass	☐ 120V LTE

Fixture comes with a 4" backplate that mounts to a standard junction box.



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 04/15/25