

COTTON™

TYPE:

WALL / CEILING - CUSTOM CONFIGURATION

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

COTTON™

WALL / CEILING - CUSTOM CONFIGURATION

TYPE:

PROJECT NAME:




Declined in hanging and ceiling versions Cotton system completes the series and, together with the many variants as a finished suspension, allows its installation in different contexts and environments, adapting to any system and lighting needs. The wide choice of one-, two-, three-, and four-light modules with different configurations and orientations lets your imagination run wild, free to create a space as you imagine it. Fixture always equipped with high-efficiency LED light source and related driver and available in white, black and bronze colors. The degree of protection against the penetration of dust, solids and liquids is IP40.

Light Source: 9W / 18W / 27W / 36W

CCT: 3000K

IP: 40

Finish:



BLACK




WHITE



BRONZE

INSTALLATION OPTION

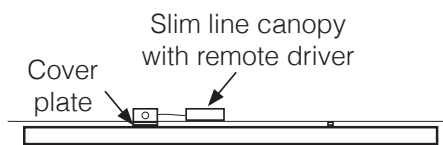

Remote Driver
Installation


COTTON™

WALL / CEILING - CUSTOM CONFIGURATION

TYPE:

PROJECT NAME:

INSTALLATION OPTIONS

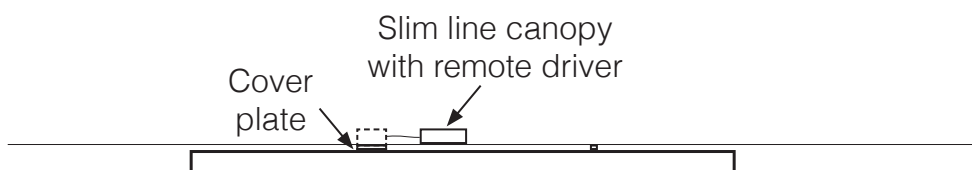


Remote Driver
Installation

**SLIM LINE CANOPY
WITH REMOTE DRIVER**
L25COTTOND2 60W/96W



D2 REMOTE DRIVER CANOPY

Ø120mm
(4.72")



**FRONT
VIEW**

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

COTTON™


WALL / CEILING - CUSTOM CONFIGURATION

TYPE:

PROJECT NAME:


COTTON SINGLE

L25A24-632.30

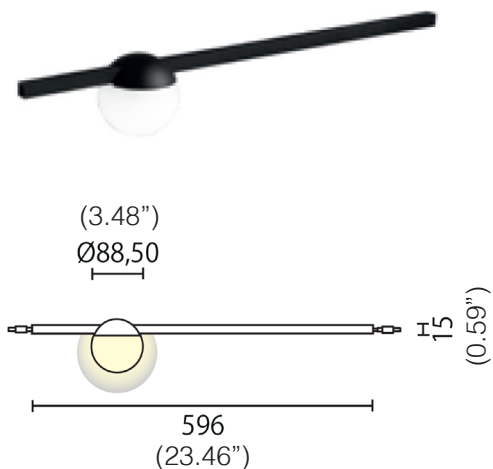


COTTON DOUBLE

L25A24-632.2.30

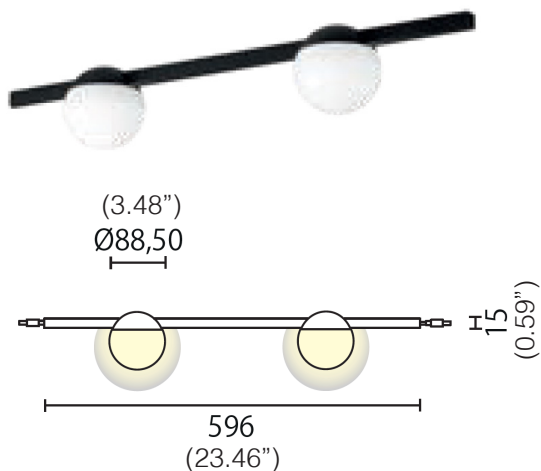


COTTON TRIPLE

L25A24-632.3.30

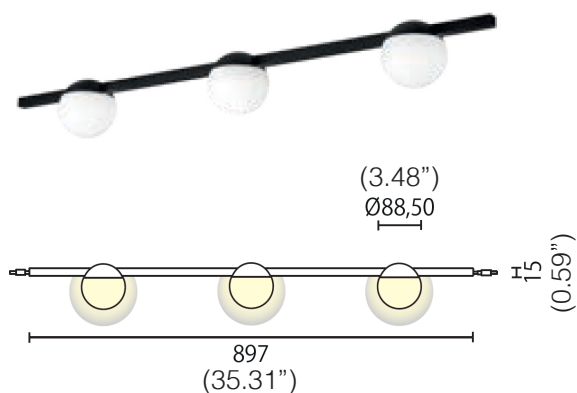

COTTON QUAD

L25A24-632.4.30

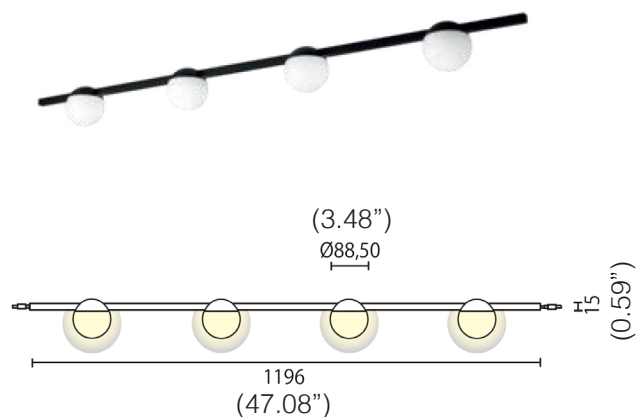

SPECIFICATION SHEET

	Light Source [W]	Lum. flux of light source [lm] (3000K)	Code
Cotton Single	9W	1000lm	L25A24-632.30
Cotton Double	18W	2000lm	L25A24-632.2.30
Cotton Triple	27W	3000lm	L25A24-632.3.30
Cotton Quad	36W	4000lm	L25A24-632.4.30

Luminart®

WWW.LUMINARTLIGHTING.COM

EMPTY PROFILE 600
L25A24-600.060



Empty profile 600 mm (23.62")

EMPTY PROFILE 900
L25A24-600.090



Empty profile 900 mm (53.43")

EMPTY PROFILE 1200
L25A24-600.120



Empty profile 1200 mm (47.24")

COTTON END CAP WITH POWER
L25A24-124A



End cap for power cable and
fixing bracket.

COTTON END CAP
L25A24-125




End cap for fixing bracket.

SPECIFICATION SHEET

			Code
Cotton Empty Profile 600	-	-	L25A24-600.060
Cotton Empty Profile 900	-	-	L25A24-600.090
Cotton Empty Profile 1200	-	-	L25A24-600.120
Cotton End Cap with power	-	-	L25A24-124A
Cotton End Cap	-	-	L25A24-125

COTTON LINEAR JOINT WITH POWER


L25A24-126A

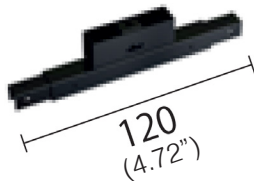

Electrified linear joint for power cable and fixing bracket.

COTTON LINEAR JOINT


L25A24-126

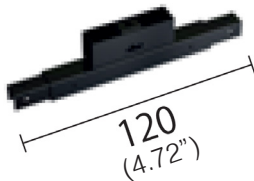

Electrified linear joint for fixing bracket.

COTTON 90° JOINT WITH POWER


L25A24-129A



Electrified 90° joint for power cable and fixing bracket.

COTTON 90° JOINT


L25A24-129



Electrified 90° joint for fixing bracket.

COTTON 90° VERTICAL JOINT WITH POWER


L25A24-128A



Electrified 90° vertical joint for power cable and fixing bracket.

COTTON 90° VERTICAL JOINT

L25A24-128A



Electrified 90° vertical joint for fixing bracket.

SPECIFICATION SHEET

			Code
Cotton Linear Joint with power feed	-	-	L25A24-126A
Cotton Linear Joint	-	-	L25A24-126
Cotton 90° Joint with power feed	-	-	L25A24-129A
Cotton 90° Joint	-	-	L25A24-129
Cotton 90° Vertical Joint with power feed	-	-	L25A24-128A
Cotton 90° Vertical Joint	-	-	L25A24-128

COTTON™

TYPE:


WALL / CEILING - CUSTOM CONFIGURATION

PROJECT NAME:



SYSTEM EXAMPLE

A new feed-drop is necessary every time power consumption exceeds the maximum power capacity (96W / driver) of the driver.

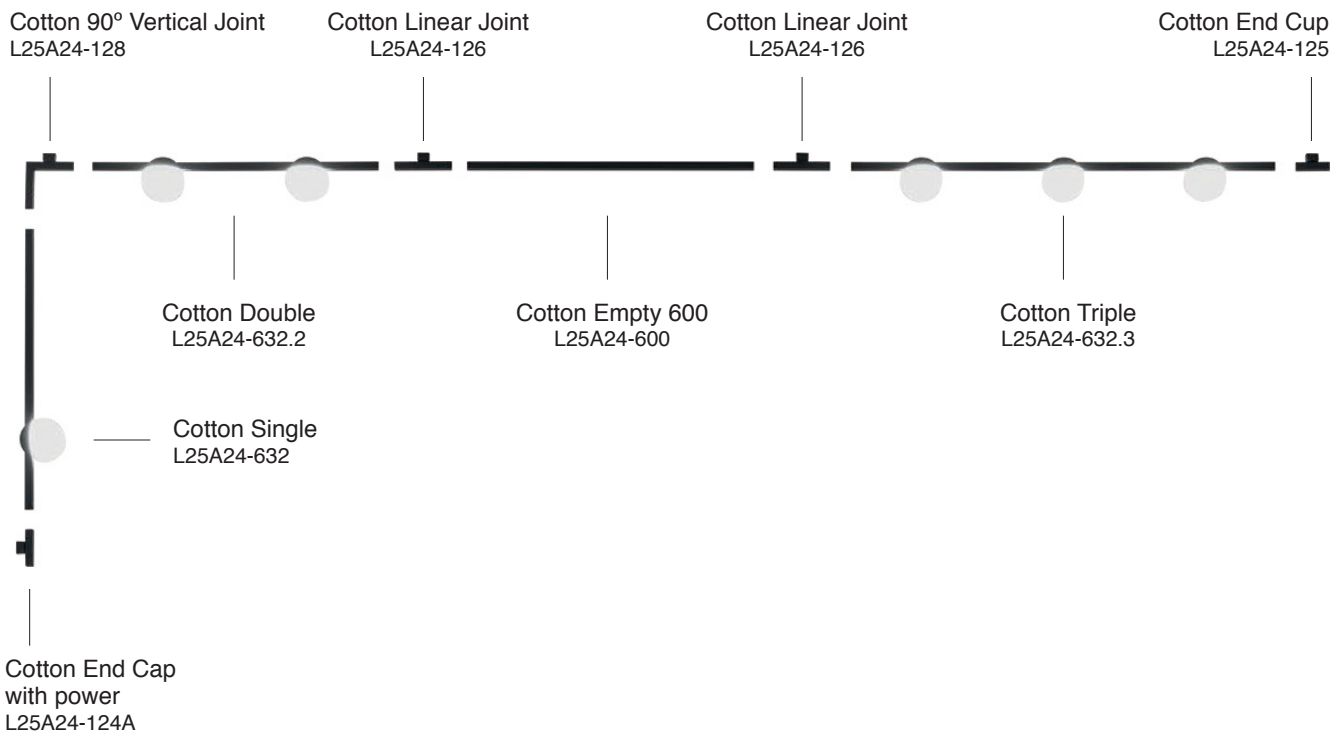

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

CONFIGURATION SHEET

The Cotton system can be designed in multiple configurations by using the different modules.
Please use the modules to create your own unique preliminary design, and submit to Luminart for engineering and quotation.

SPECIFICATION SHEET

COTTON™

TYPE:

WALL / CEILING - CUSTOM CONFIGURATION

PROJECT NAME:

ORDERING INFO

LED

Dimming Options

☐ 30: 3000K

☐ 120V LTE

☐ 120-277V 0-10V



Order Code

Finish

Quantity

SPECIFICATION SHEET

Luminart®

— WWW.LUMINARTLIGHTING.COM