

FREEDOM CIRCLE™

CEILING

TYPE:

PROJECT NAME:




SPECIFICATION SHEET

FREEDOM CIRCLE™

CEILING

TYPE:

PROJECT NAME:

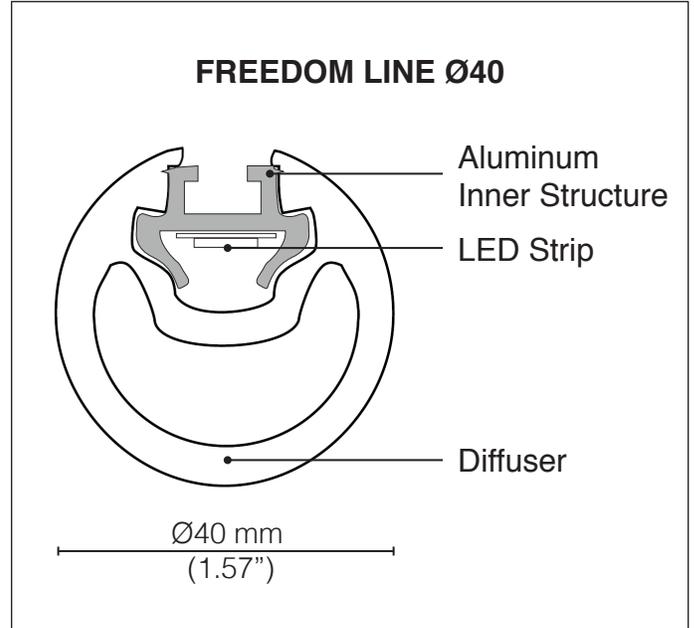



The Freedom Circle is circle ceiling LED luminaire. This circle shape is well-suited to provide lighting for both residential and hospitality settings.

Light Source: 36-136W LED

Lum. flux of light source: 4523-16964 lm

IP: 20

Material: Double-layered plastic profile with the outside layer from a material resistant to UV radiation

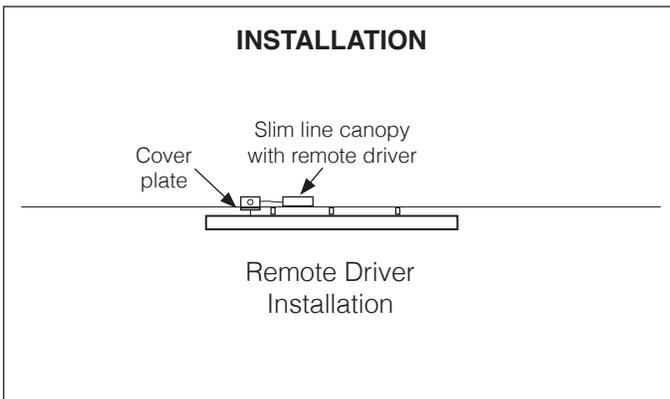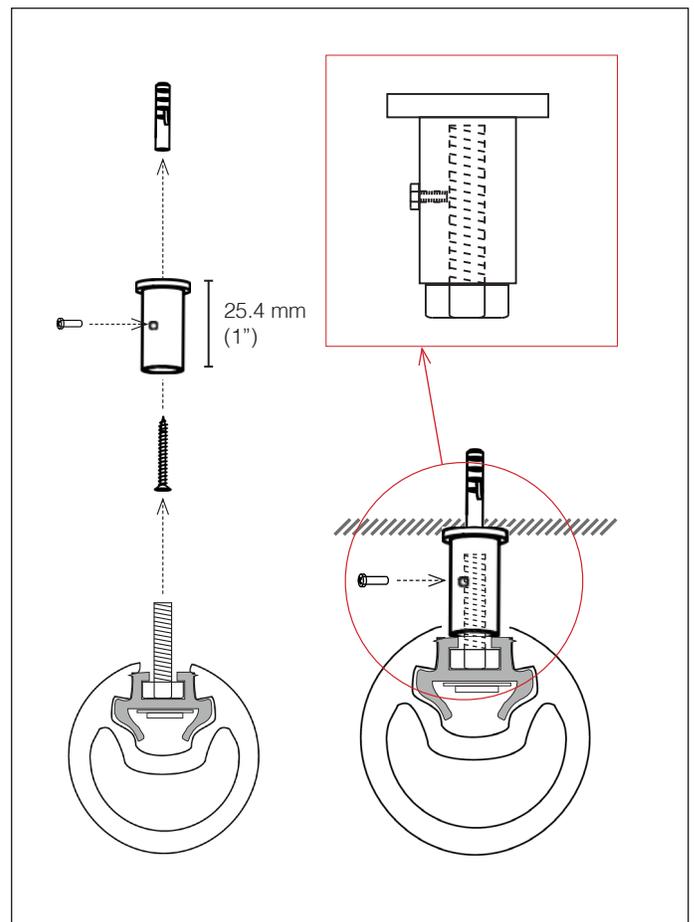

SPECIFICATION SHEET


FREEDOM CIRCLE™

CEILING

TYPE:


PROJECT NAME:

FREEDOM CIRCLE 80
L56CELRD80




800 mm
(31.49")

FREEDOM CIRCLE 120
L56CELRD120




1200 mm
(47.24")

FREEDOM CIRCLE 150
L56CELRD150

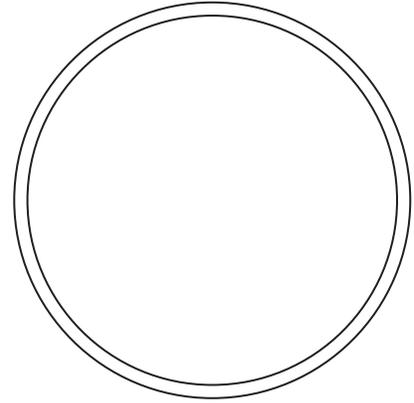


1500 mm
(59.05")

FREEDOM CIRCLE 200
L56CELRD200

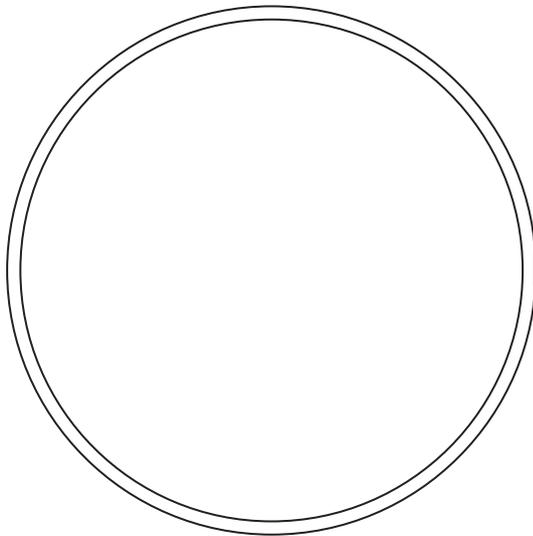

2000 mm
(78.74")

FREEDOM CIRCLE 250
L56CELRD250

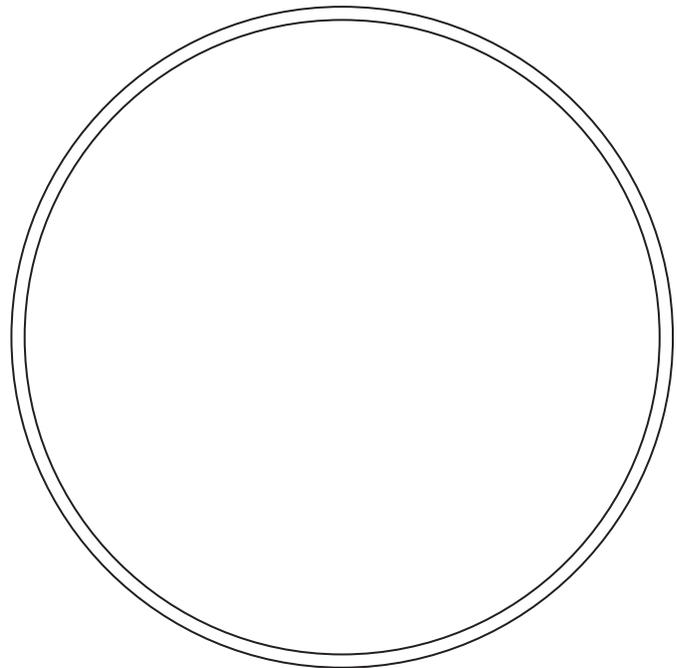

2500 mm
(98.42")

SPECIFICATION SHEET


FREEDOM CIRCLE™

CEILING

TYPE:

PROJECT NAME:

FREEDOM CIRCLE 300
L56CELRD300

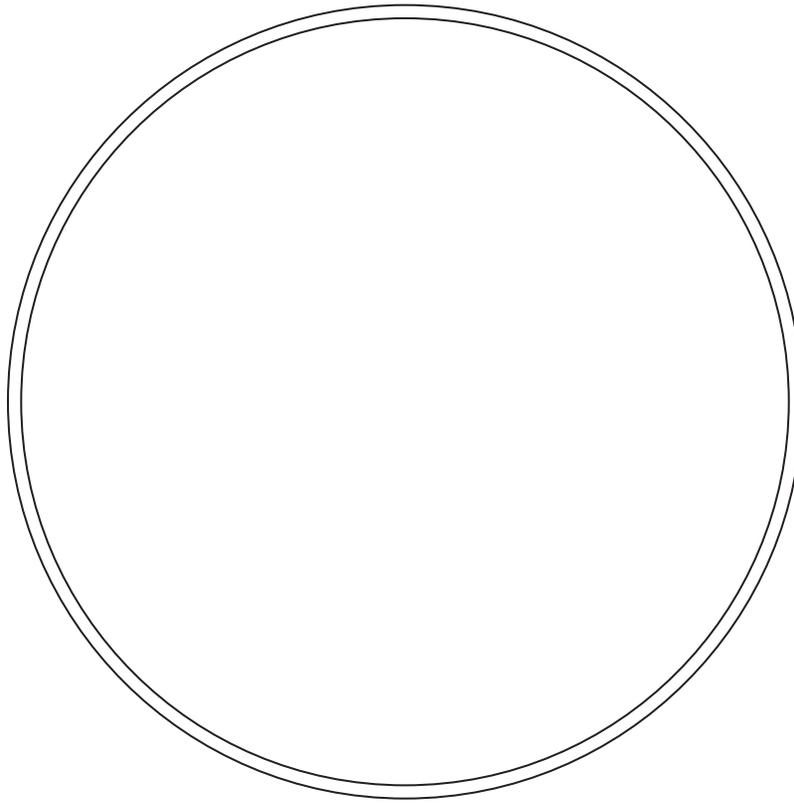

3000 mm
(118.11")

SPECIFICATION SHEET



FREEDOM CIRCLE™

CEILING

TYPE:

PROJECT NAME:



FREEDOM CIRCLE 80
L56CELRD80



Light Source: 36W LED

Lum. flux: 4523 lm



FREEDOM CIRCLE 120
L56CELRD120



Light Source: 54W LED

Lum. flux: 6785 lm

FREEDOM CIRCLE 150
L56CELRD150

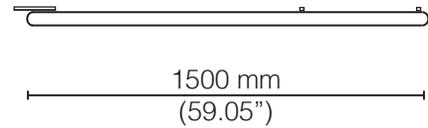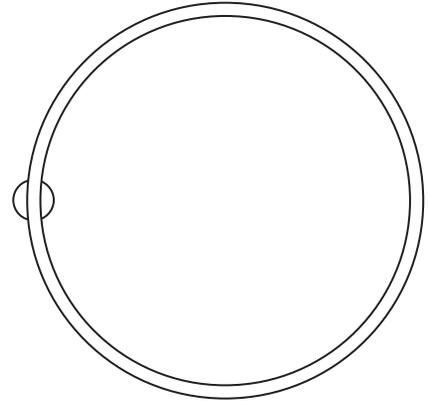

Light Source: 68W LED

Lum. flux: 8482 lm

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)

- L56CELRD80
- L56CELRD120
- L56CELRD150

Installation Options

- RM: Slim line canopy with remote driver
- IT: Surface mount canopy with integrated driver

LED

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

Driver Options

- 120V LTE
- 120V-277V 0-10V





FREEDOM CIRCLE™

CEILING

TYPE:

PROJECT NAME:



FREEDOM CIRCLE 200
L56CELRD200

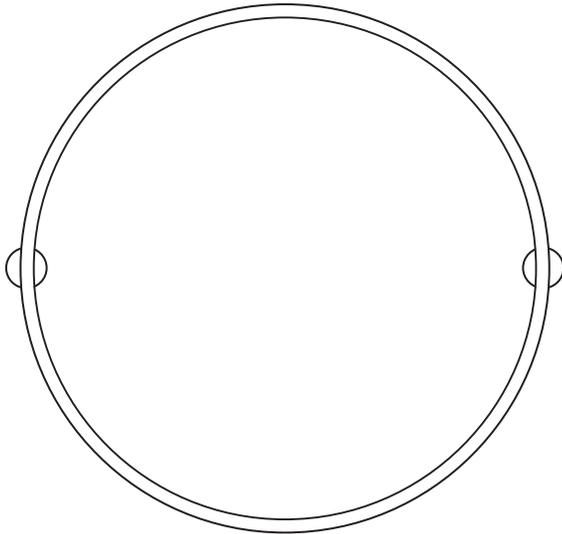

Light Source: 90W LED

Lum. flux of light source: 11309 lm

FREEDOM CIRCLE 250
L56CELRD250

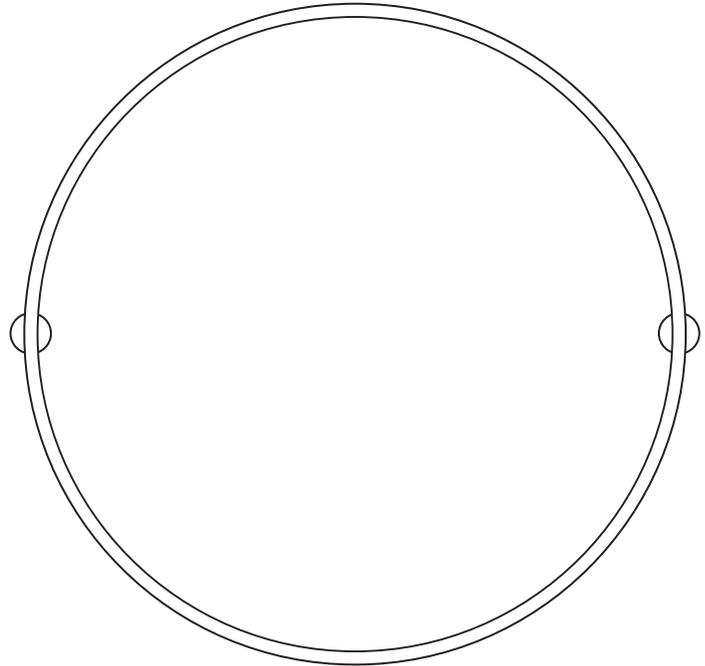

Light Source: 113W LED

Lum. flux of light source: 14137 lm

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Installation Options	LED	Driver Options
<input type="radio"/> L56CELRD200	<input type="radio"/> RM: Slim line canopy with remote driver	<input type="radio"/> 27: 2700K	<input type="radio"/> 120V LTE
<input type="radio"/> L56CELRD250	<input type="radio"/> IT: Surface mount canopy with integrated driver	<input type="radio"/> 30: 3000K	<input type="radio"/> 120V-277V 0-10V
		<input type="radio"/> 35: 3500K	
		<input type="radio"/> 40: 4000K	



FREEDOM CIRCLE™



CEILING

TYPE:

PROJECT NAME:

FREEDOM CIRCLE 300

L56CELRD300

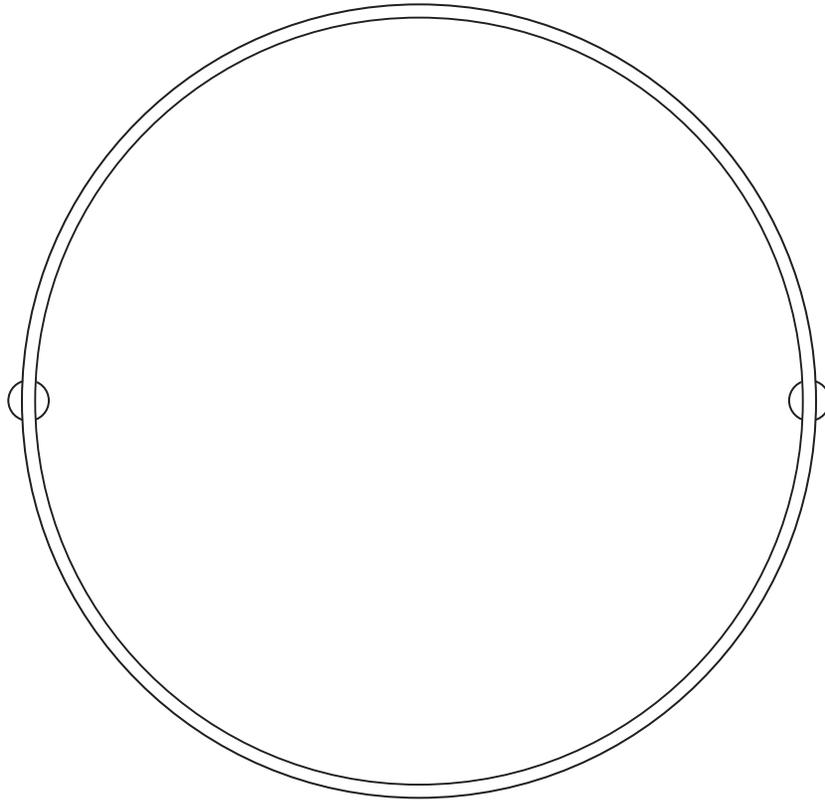

Light Source: 136W LED

Lum. flux of light source: 16964 lm

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Installation Options	LED	Driver Options
<input type="radio"/> L56CELRD300	<input type="radio"/> RM: Slim line canopy with remote driver <input type="radio"/> IT: Surface mount canopy with integrated driver	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 35: 3500K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V





FREEDOM CIRCLE™

CEILING

TYPE:

PROJECT NAME:

FREEDOM CIRCLE CUSTOM SIZE L56CELRDCUSTOM

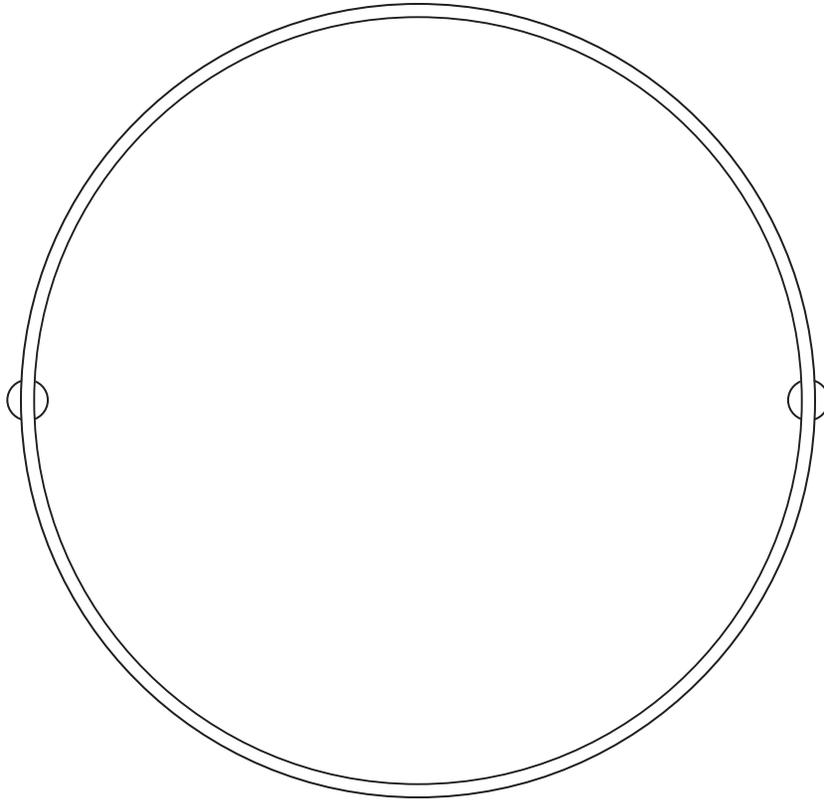

CUSTOM SIZE
ON REQUEST

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Installation Options	LED	Driver Options
<input type="radio"/> L56CELRDCUSTOM	<input type="radio"/> RM: Slim line canopy with remote driver <input type="radio"/> IT: Surface mount canopy with integrated driver	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 35: 3500K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V

