


MINILINE PLUS™

CEILING - CUSTOM CONFIGURATION

TYPE:

PROJECT NAME:

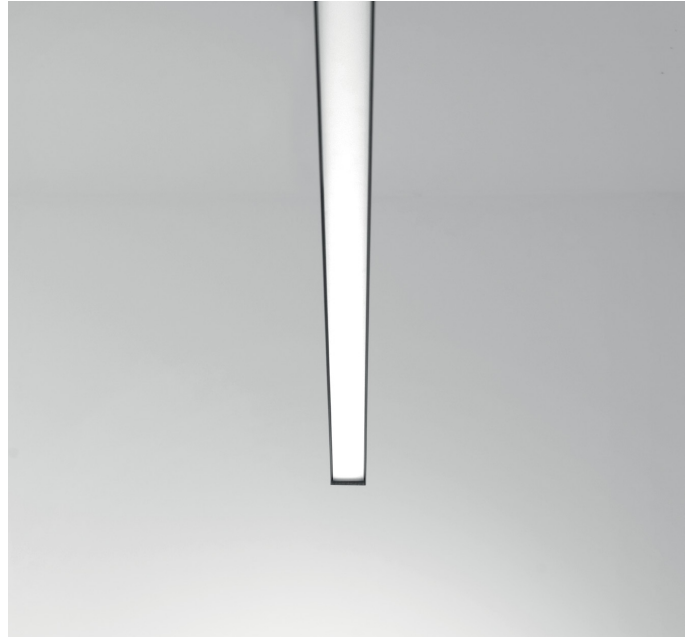

Profile with a refined and elegant Design. It is made of painted extruded aluminium and equipped with LED light source with high lighting performance and driver. A wide range of accessories makes it possible to create endless compositions according to the space to be illuminated, drawing a line of light that crosses the space illuminating it. The diffuser set back from the profile, together with the possibility of choosing the micro-prism screen that limits direct luminance make it an ideal product for workplaces, offices and desks with video terminals.

Light Source: 33-76W


CCT: 2700K / 3000K / 4000K

IP: 40

Finish:

				
06	08	55	57	60
Black	White	Bronze	Sienna	Titanium

INSTALLATION OPTION

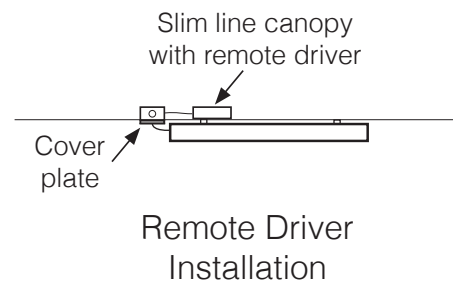


MINILINE PLUS™

CEILING - CUSTOM CONFIGURATION


TYPE:

PROJECT NAME:

INSTALLATION OPTION

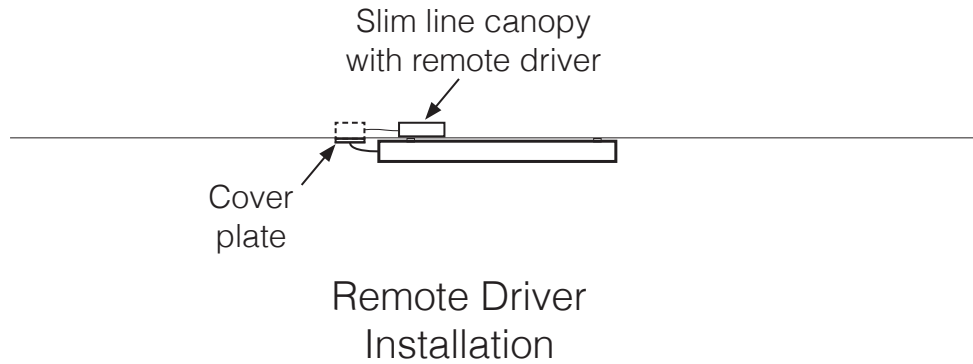


**SLIM LINE CANOPY
WITH REMOTE DRIVER**
L25MINILINED2 96W



D2 REMOTE DRIVER CANOPY

Ø120mm
(4.72")



**FRONT
VIEW**

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

MINILINE PLUS™


CEILING - CUSTOM CONFIGURATION

TYPE:

PROJECT NAME:



MINILINE PLUS

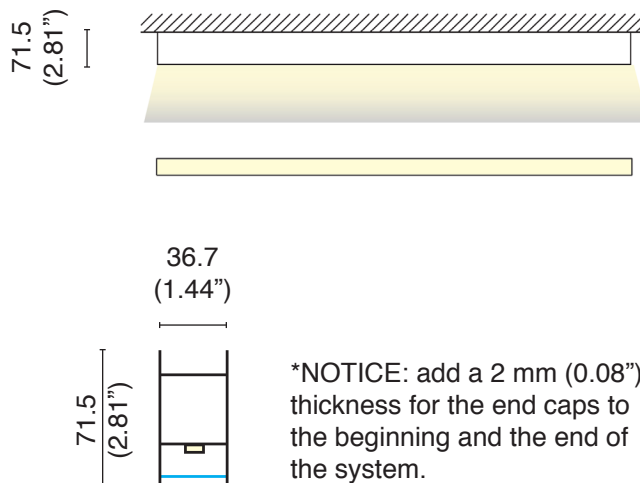

MINILINE PLUS - with power feed

Length [mm (inches)]	Light Source [W]	Lum. flux of light source [lm] (3000K)	Code
1103 mm (43.42")	33W	3300lm	L25A611.A33
1603 mm (63.11")	46W	4800lm	L25A611.A46
1903 mm (74.92")	54W	5700lm	L25A611.A54
2503 mm (98.54")	70W	7500lm	L25A611.A70
2803 mm (110.35")	76W	8400lm	L25A611.A76

MINILINE PLUS - without power feed

Length [mm (inches)]	Light Source [W]	Lum. flux of light source [lm] (3000K)	Code
1103 mm (43.42")	33W	3300lm	L25A611.33
1603 mm (63.11")	46W	4800lm	L25A611.46
1903 mm (74.92")	54W	5700lm	L25A611.54
2503 mm (98.54")	70W	7500lm	L25A611.70
2803 mm (110.35")	76W	8400lm	L25A611.76

SPECIFICATION SHEET

Luminart®



WWW.LUMINARTLIGHTING.COM

MINILINE PLUS™

CEILING - CUSTOM CONFIGURATION

TYPE:

PROJECT NAME:

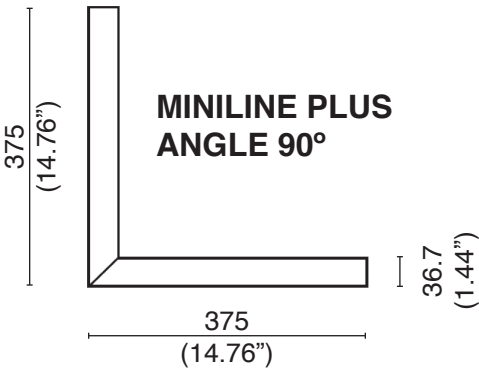

MINILINE PLUS ANGLE 90°

Length [mm (inches)]	Light Source [W]	Lum. flux of light source [lm] (3000K)	Code
375x375 mm (14.76"x14.76")	23W	2100lm	L25A6-053

MINILINE PLUS™

CEILING - CUSTOM CONFIGURATION


TYPE:
PROJECT NAME:

CEILING I JOINER
L25A6-050



I Joiner to connect the modules.

**MICRO-PRISMATIC POLYMETHIL
METHACRYLATE DIFFUSER**
L25A6-025/100 (code per metter)

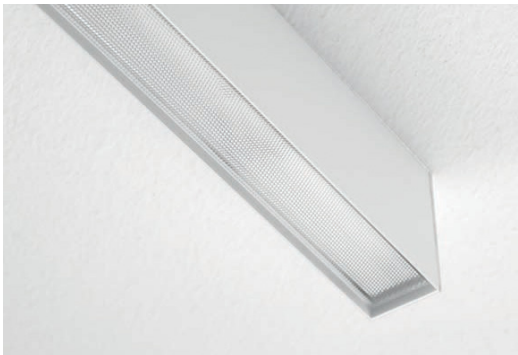

	Code
Ceiling I Joiner	L25A6-050
Micro-prismatic polymethyl methacrylate diffuser	L25A6-025/100 (code per metter)

MINILINE PLUS™


CEILING - CUSTOM CONFIGURATION

TYPE:

PROJECT NAME:

SYSTEM EXAMPLE

A new feed-drop is necessary every time power consumption exceeds the maximum power capacity (96W / driver) of the driver.

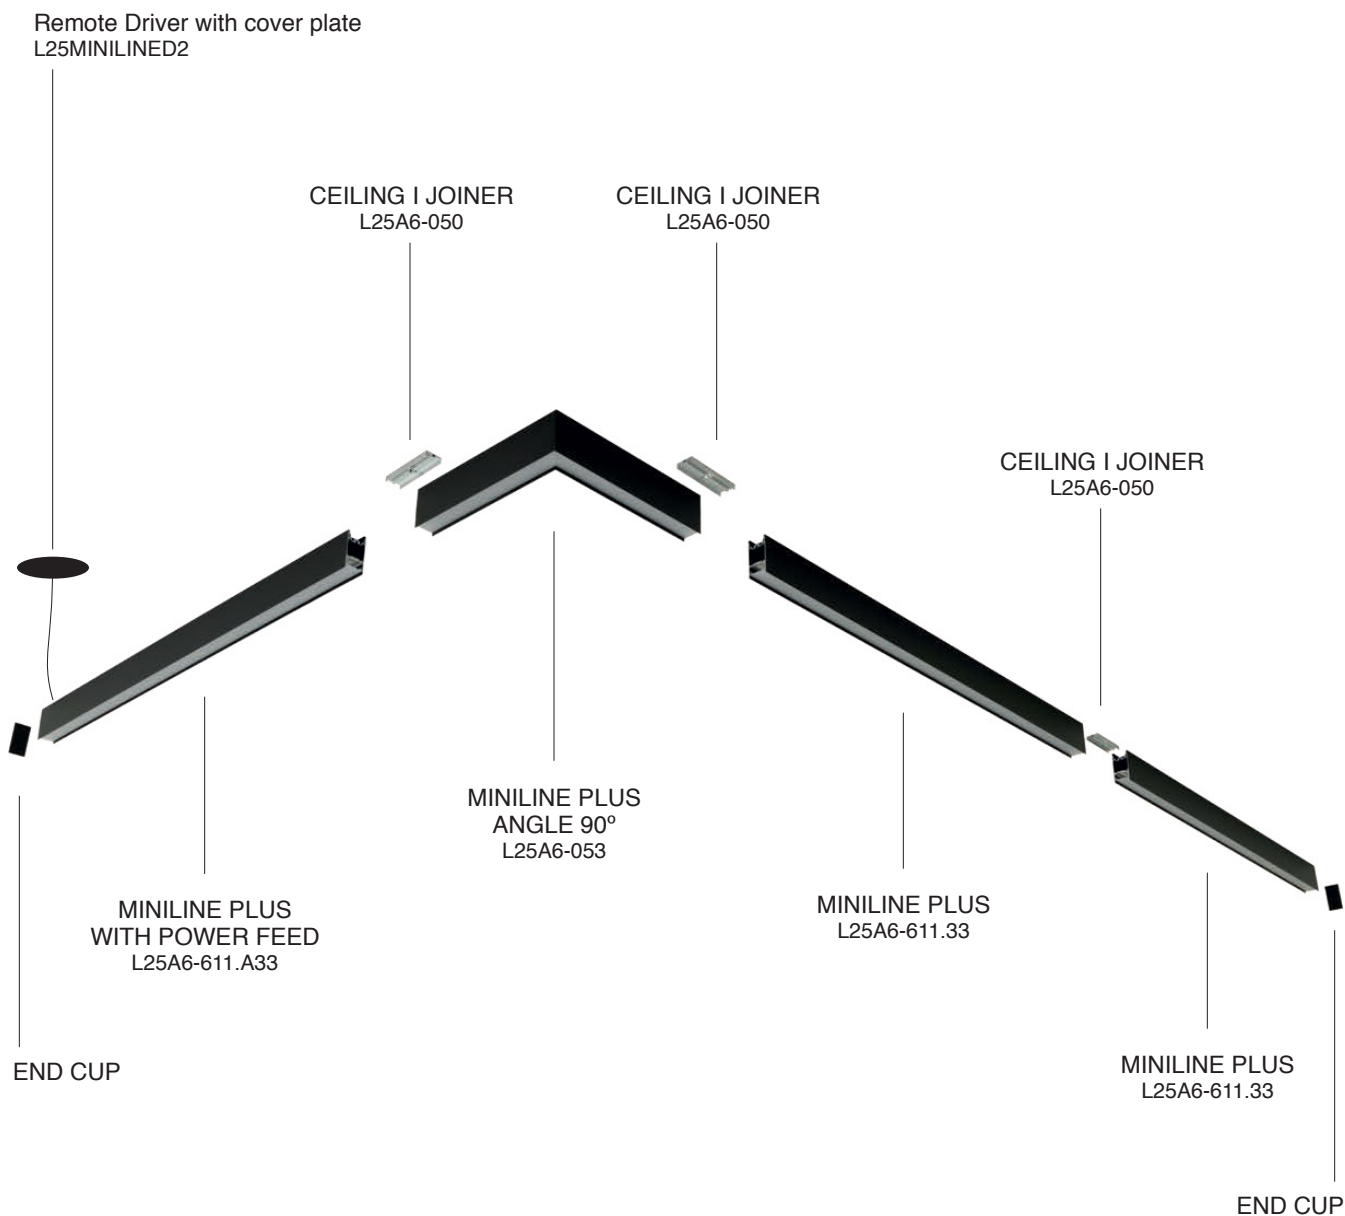

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

MINILINE PLUS™

CEILING - CUSTOM CONFIGURATION

TYPE:

PROJECT NAME:

CONFIGURATION SHEET

The Miniline Plus system can be designed in multiple configurations by using the different modules.
Please use the modules to create your own unique preliminary design, and submit to Luminart for engineering and quotation.

SPECIFICATION SHEET

MINILINE PLUS™

TYPE:

CEILING - CUSTOM CONFIGURATION

PROJECT NAME:

ORDERING INFO

LED

Dimming Options

☐ 27: 2700K

☐ 120V LTE

☐ 30: 3000K

○ 120-277V 0-10V

☐ 40: 4000K



Order Code

Finish

Quantity

SPECIFICATION SHEET

Luminart®

- WWW.LUMINARTLIGHTING.COM