

POP P39™

SUSPENSION

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 05/22/25

POP P39™ 80

SUSPENSION

TYPE:

PROJECT NAME:



Color rendering: CRI >95

Ingress protection: IP20


Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

☐ Frame

- 02  Matt Black
- 06  Matt White
- K  Ice Black
- W  Pearl White
- X  Light Brass
- Y  Light Copper
- Z  Light Bronze

Input [W] 8x6W

Lum. flux of light source [lm]	2700K	8x664 lm
	3000K	8x689 lm

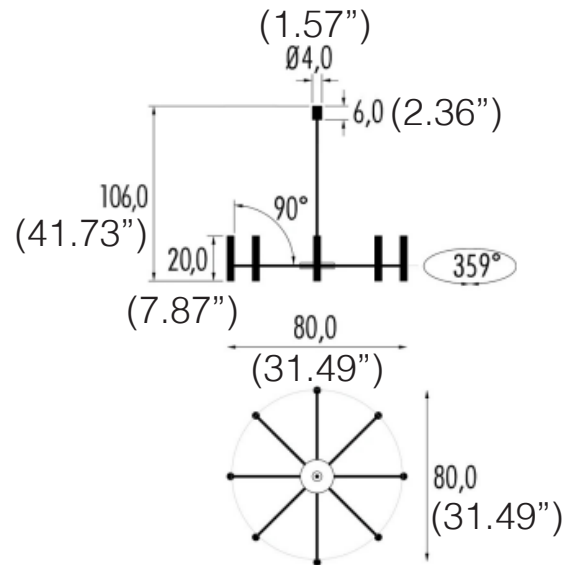

Installation Note:
Fixture comes with a 4" backplate that mounts to a standard junction box

ORDERING INFO

Model (Order Code)	Finish Options	Optic Options	LED	Driver Options
☐ L173P39A.0	☐ 02: Black ☐ 06: White ☐ K: Ice Black ☐ W: Pearl White ☐ X: Light Brass ☐ Y: Light Copper ☐ Z: Light Bronze	☐ S: 35°	☐ 27: 2700K ☐ 30: 3000K	☐ 120V LTE ☐ 120V-277V 0-10V



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 05/22/25

POP P39™ 120

SUSPENSION

TYPE:

PROJECT NAME:

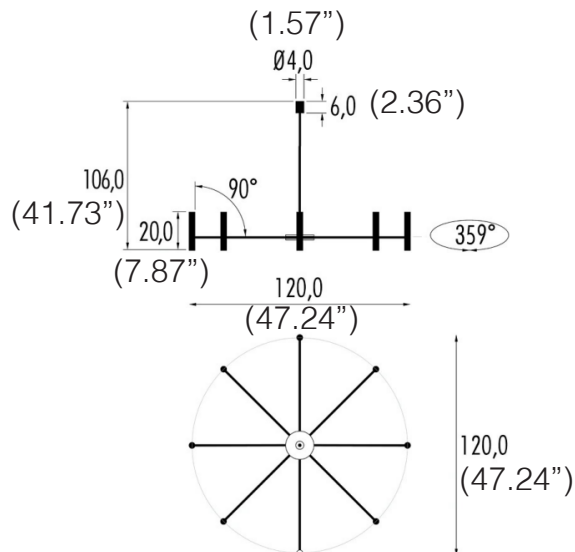

Color rendering: CRI >95

Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

☐ *Frame*

- 02 ● Matt Black
- 06 ○ Matt White
- K ● Ice Black
- W ○ Pearl White
- X ● Light Brass
- Y ● Light Copper
- Z ● Light Bronze

Input [W] 8x6W

Lum. flux of light source [lm]	2700K	8x664 lm
	3000K	8x689 lm

Installation Note:

Fixture comes with a 4" backplate that mounts to a standard junction box

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Finish Options	Optic Options	LED	Driver Options
○ L173P39B.0	○ 02: Black ○ 06: White ○ K: Ice Black ○ W: Pearl White ○ X: Light Brass ○ Y: Light Copper ○ Z: Light Bronze	○ S: 35°	○ 27: 2700K ○ 30: 3000K	○ 120V LTE ○ 120V-277V 0-10V



Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 05/22/25