

ANACONDA
SYSTEM

TYPE:

PROJECT NAME:




SPECIFICATION SHEET

ANACONDA

SYSTEM

TYPE:

PROJECT NAME:

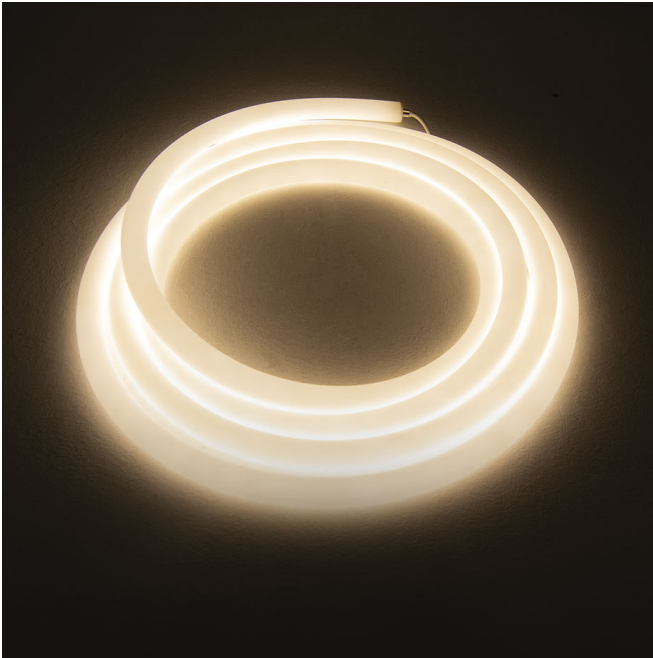

Description:

48V flexible silicone LED tube. CRI >90. IP 54.

Material:

Silicone

Light emission:


360°

Finishes:

01 White

Voltage:

48V DC

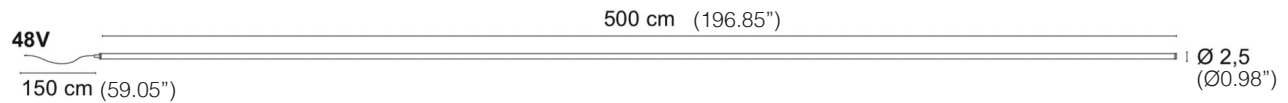

Code: L675565 (500cm / 196.85" / 16.4ft)

/W 62.5W 5500lm 48V 4000K CRI>90 48V DC

/WW 62.5W 5000lm 48V 3000K CRI>90 48V DC

/XW 62.5W 4500lm 48V 2700K CRI>90 48V DC

Net weight: 3.4 kg (7.5 lbs)


ANACONDA

SYSTEM

TYPE:

PROJECT NAME:

SYSTEM ELEMENTS



L-shaped starting element

L677530 0.2kg

- .01 White
- .02 Black
- .08 Yellow
- .09 Orange
- .10 Azure



Starting element

L677531 0.16kg


- .01 White
- .02 Black
- .08 Yellow
- .09 Orange
- .10 Azure



T-shaped starting element

L677532 0.2kg

- .01 White
- .02 Black
- .08 Yellow
- .09 Orange
- .10 Azure



Element for displacement

L677533 0.2kg

- .01 White
- .02 Black
- .08 Yellow
- .09 Orange
- .10 Azure



Anaconda end cap

L677536 0.03kg

- .01 White
- .02 Black
- .08 Yellow
- .09 Orange
- .10 Azure

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

ANACONDA

SYSTEM

TYPE:

PROJECT NAME:

SYSTEM ELEMENTS



Anaconda end cap with cable outlet

L677537 0.03kg

.01 White

.02 Black

.08 Yellow

.09 Orange

.10 Azure



Rigid methacrylate tube

L677540.100: 100cm (39.37")
L677540.200: 200cm (78.74")
L677540.300: 300cm (118.11")

L677540 0.01kg

.00 Transparent



pair of turnbuckles with 10-metre steel cable

L670965.31/10 0.52kg

.31 Chromed



Canopy

L670992 0.01kg

.01 White

.02 Black

ACCESSORIES



Suspension kit

L677534 0.02kg

.00 Transparent

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

ANACONDA

SYSTEM

TYPE:

PROJECT NAME:

ACCESSORIES



Ceiling/wall mounting clips

L677535 0.01kg
.00 Transparent




Fixing clip for cable system

L677538 0.01kg
.00 Transparent




Cable gland cap for ANACONDA

L677541 0.01kg
.01 White



End cap for ANACONDA

L677542 0.01kg
.01 White



SPECIFICATION SHEET



ANACONDA

SYSTEM

TYPE:

PROJECT NAME:

ANACONDA INSTALLATION EXAMPLE

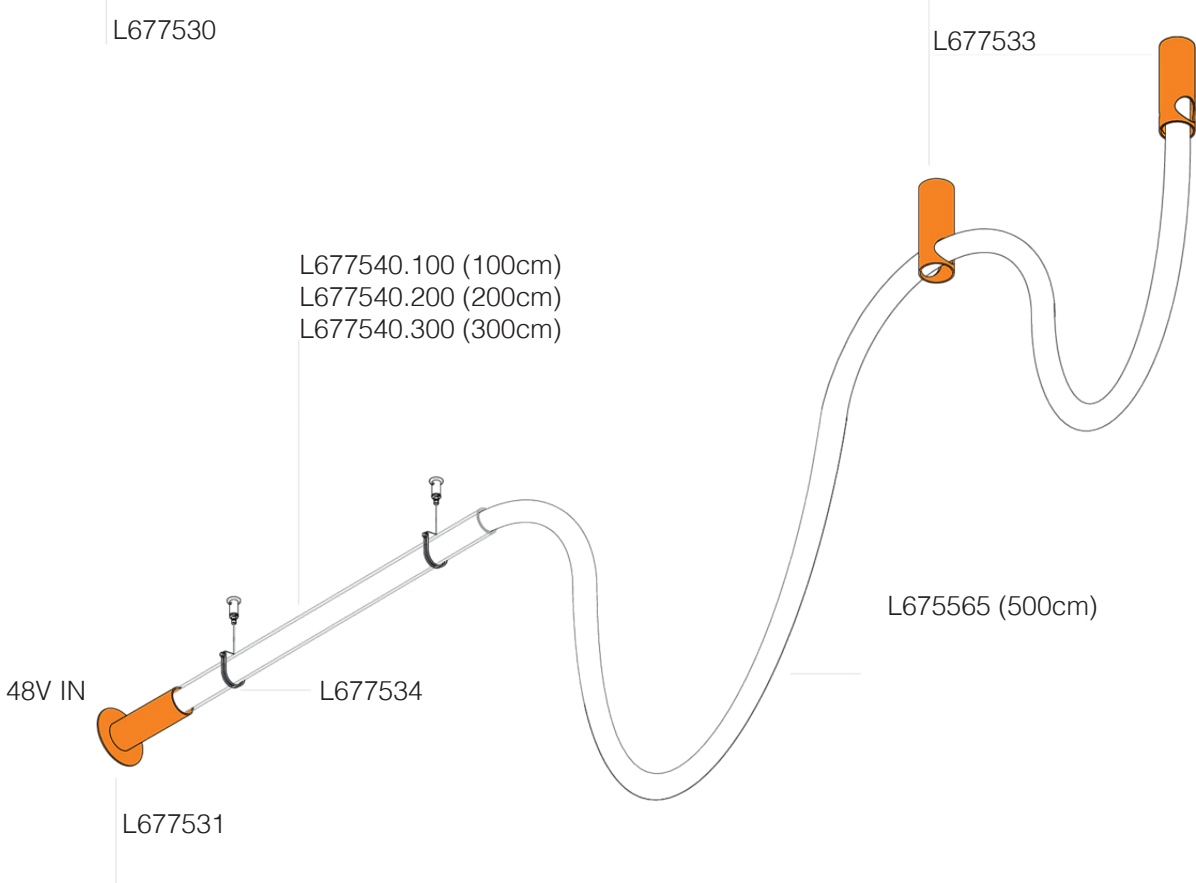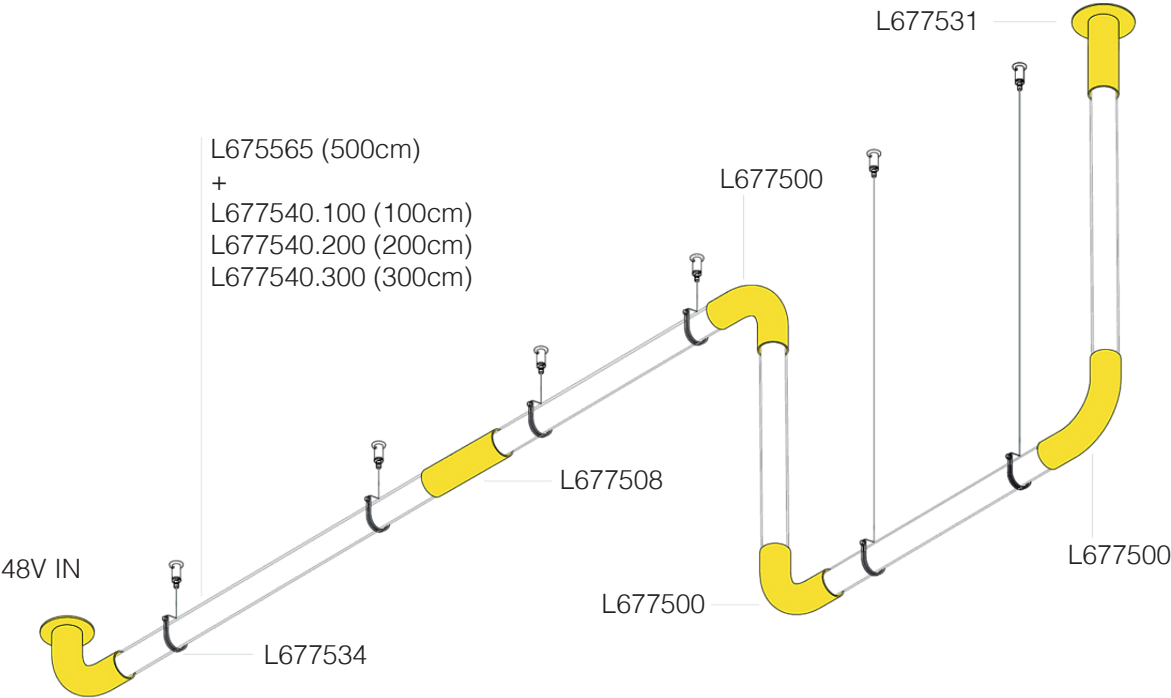

SPECIFICATION SHEET


ANACONDA

SYSTEM

TYPE:

PROJECT NAME:

ANACONDA INSTALLATION EXAMPLE

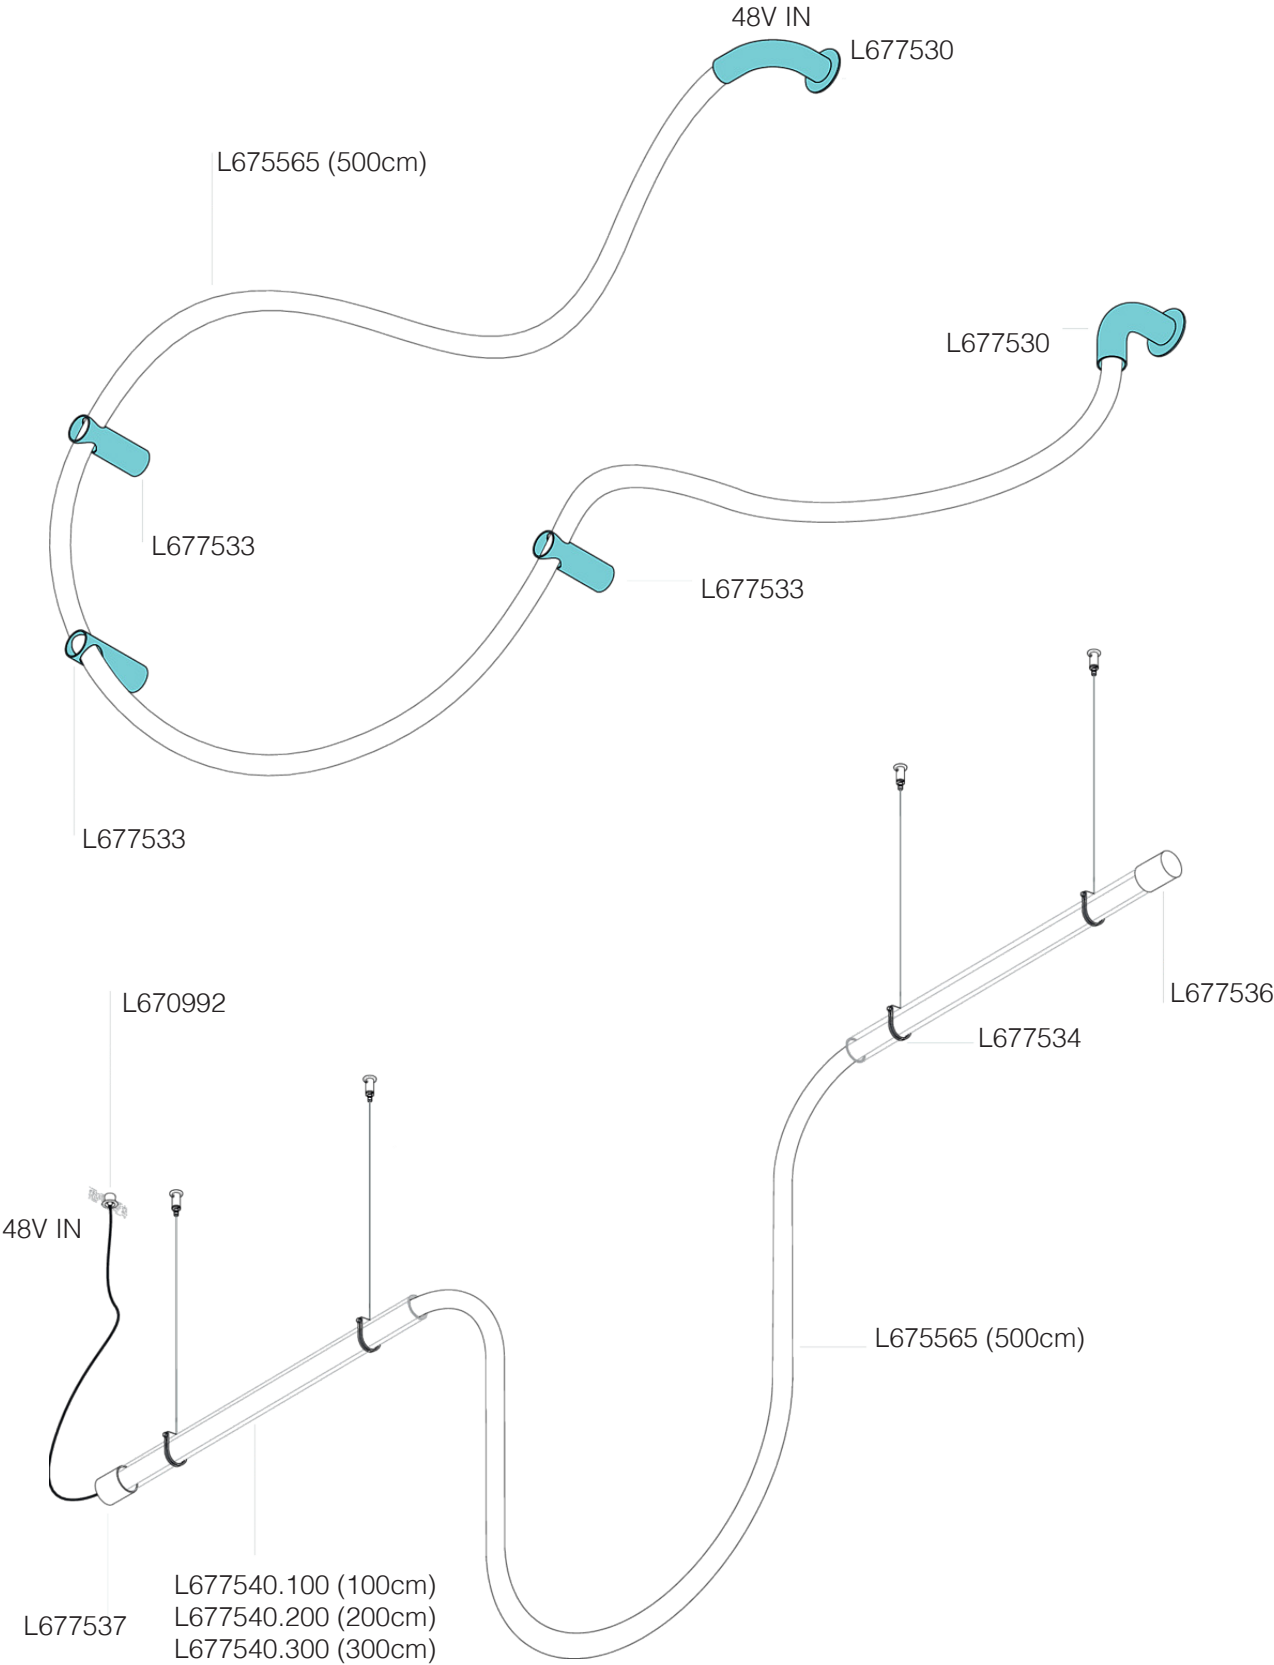

SPECIFICATION SHEET


ANACONDA

SYSTEM

TYPE:

PROJECT NAME:

ANACONDA INSTALLATION EXAMPLE

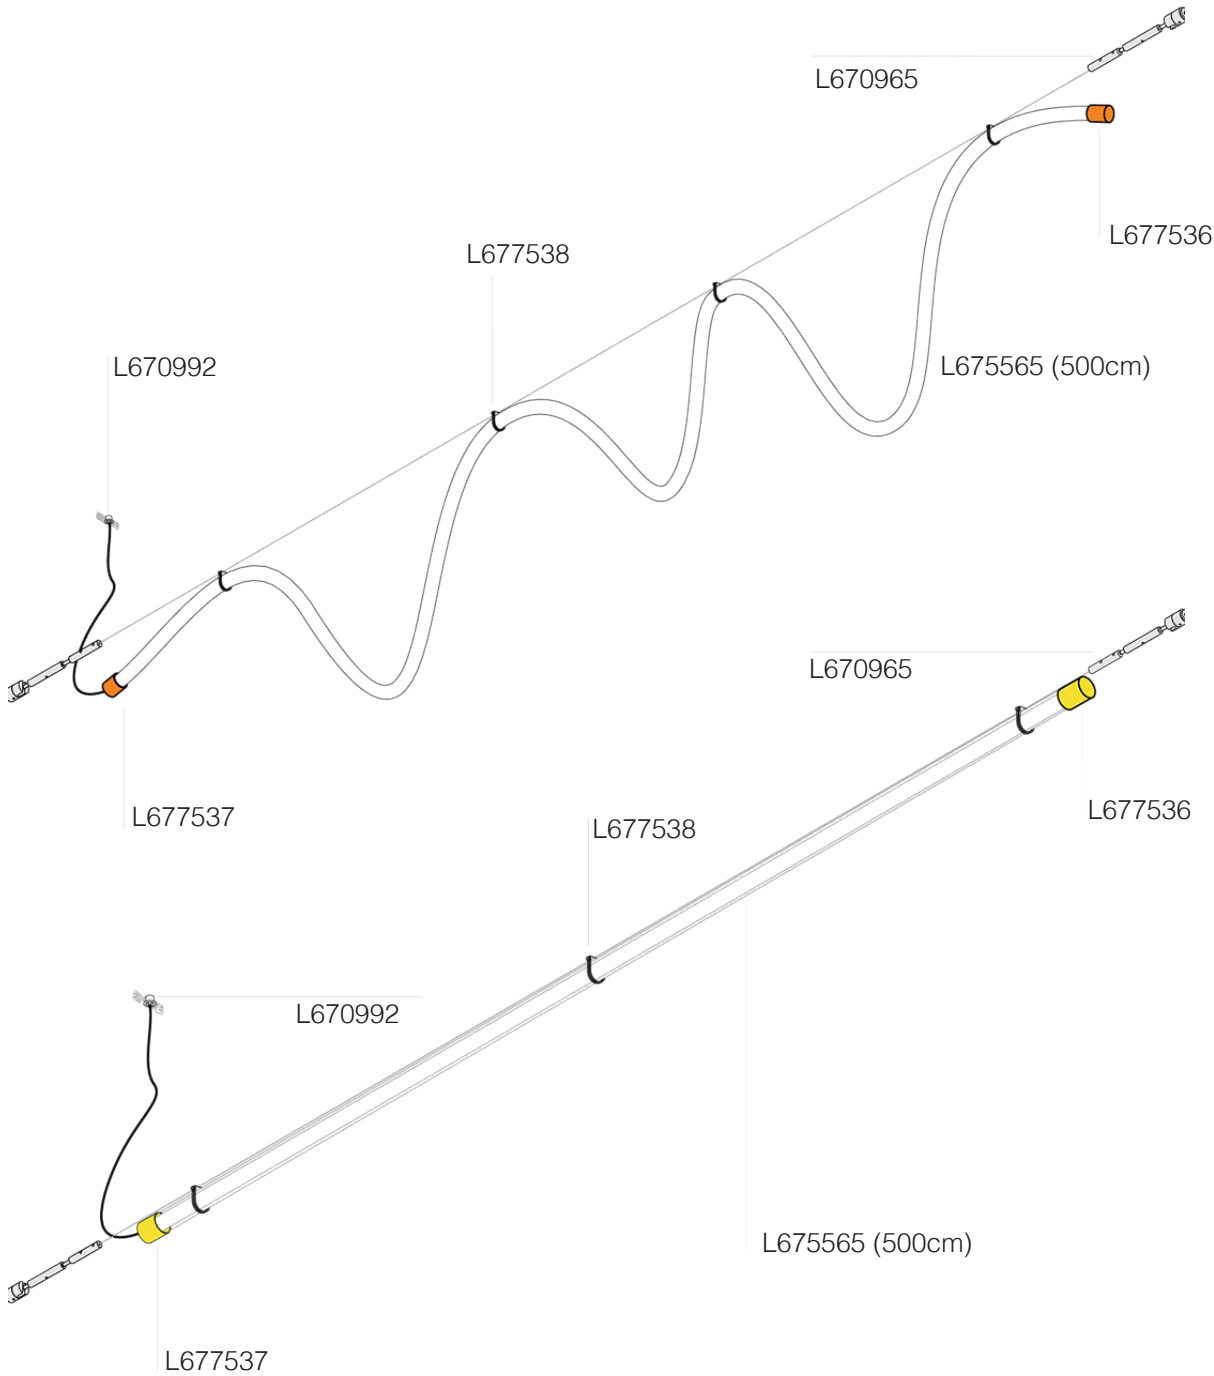

SPECIFICATION SHEET

SYSTEM

PROJECT NAME:

Intertek

Model (Order Code)	Finish	LED	Driver Options
☐ L675565	☐ 01 White	☐ /XW: 2700K ☐ /WW: 3000K ☐ /W: 4000K	☐ 120V Phase Dimming ☐ 120V 0-10V Dimming ☐ 277V 0-10V Dimming

[illegible]

SPECIFICATION SHEET