

DRIFT

SUSPENSION

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

DRIFT 800

SUSPENSION

TYPE:

PROJECT NAME:



Material:

PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B

Fixture:

1.3m transparent cable
3 metal wires with adjustable griplock
Black ceiling cap

Lighting properties:



Integrated LED
40W | 4202lm



Dimmable



3000K | 4000K



IP20

Acoustic properties:




1.75 m² of acoustic
absorption material of α_w
0.45



Diffusion due to the 'lamella' design

Dimensions:

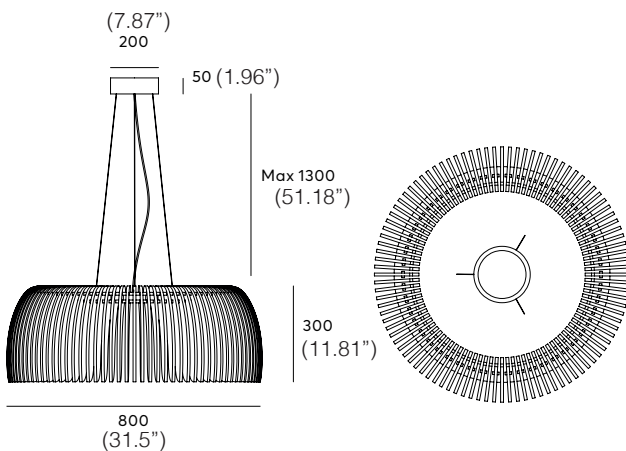

Mounting:



DRIFT 800

SUSPENSION

TYPE:

PROJECT NAME:


Colors:




13_Black



03_Charcoal



36_Dim Grey



11_Fog Grey



07_Ghost White




19_Midnight



26_Ocean



30_Cool Grey



41_Mint Pastel




17_Forest



40_Faded Jade



06_Olive



39_Warm Grey



04_Bisque



35_Ochre



45_Chilli



09_Lavender



31_Rosé

Light source specifications:

Based on calculations of Drift 800 in colour 26_Ocean | 3000K | Trailing edge



LED power:	40W
Connection voltage:	120V AC
Luminous Flux: 3000K/4000K	4202lm / 4421lm
Life time:	L80/B50 44.000h
Driver:	Included Integrated

Power factor: 3000K/4000K	105lm/W 110lm/W
Optics Beam of light:	prismatic diffuser 90°
CCT Color temperature:	3000K 4000K
CRI:	Ra >90
UGR:	<19
Operating temperature:	-20 ~ +45

Photometrics:

DRIFT 1000

SUSPENSION

TYPE:

PROJECT NAME:



Material:

PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B

Fixture:

5m transparent cable
3 metal wires with adjustable griplock
Black ceiling cap

Lighting properties:



Integrated LED
62W | 5883lm



Dimmable



3000K | 4000K



IP20

Acoustic properties:




3.45 m² of acoustic absorption
material of α_w 0.45



Diffusion due to the 'lamella' design

Dimensions:

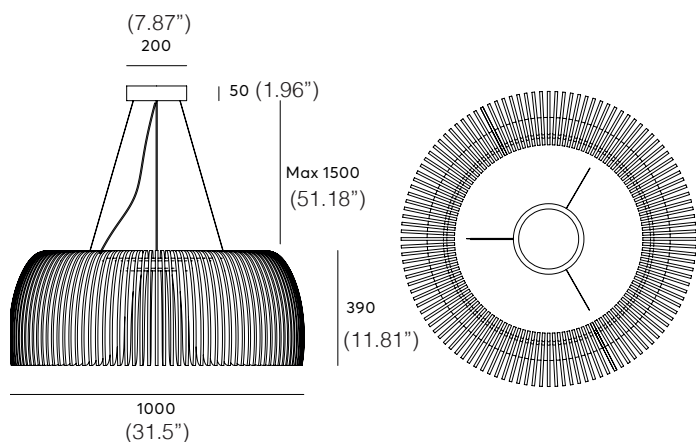

Mounting:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

DRIFT 1000

SUSPENSION

TYPE:

PROJECT NAME:


Colors:




13_Black



03_Charcoal



36_Dim Grey



11_Fog Grey



07_Ghost White




19_Midnight



26_Ocean



30_Cool Grey



41_Mint Pastel




17_Forest



40_Faded Jade



06_Olive



39_Warm Grey



04_Bisque



35_Ochre



45_Chilli



09_Lavender



31_Rosé

Light source specifications:

Based on calculations of Drift 800 in colour 26_Ocean | 3000K | Trailing edge



LED power:	62W
Connection voltage:	120V AC
Luminous Flux:	5883lm
Direct / Indirect lighting:	60% / 40%
Life time:	L80/B20 50.000h
Driver:	Included Integrated
Power factor:	95lm/W
Optics Beam of light:	Acrylic prismatic Lens 90°
CCT Color temperature:	3000K 4000K
CRI:	Ra >80
UGR:	<19
Operating temperature:	-20 ~ +45

Photometrics:

Lumen intensity distribution