

PARKWAY

FLOOR LAMP

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

PARKWAY

FLOOR LAMP

TYPE:

PROJECT NAME:



Material:

PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B

Fixture:

2 meter black PVC cable with floor switch and plug

Lighting properties:



E26
Lightbulb excluded



IP20

Acoustic properties:




5.67 m² of acoustic absorption
material of α_w 0.45



Diffusion by design

Dimensions:

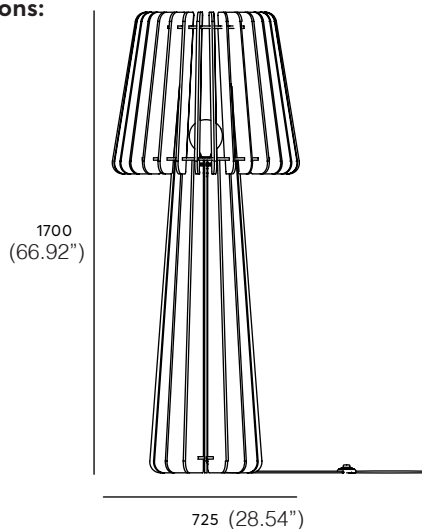

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

PARKWAY

FLOOR LAMP

TYPE:

PROJECT NAME:

Colors:



Acoustic specifications:


The acoustic design principle.

Parkway is an acoustic standing light designed for larger open spaces where soundwaves travel freely. It effectively reduces reverberation time, improving overall sound quality.

Ideal for placement in corners or near hard surfaces, Parkway also functions as an efficient bass absorber in noisy environments.

Calculated acoustic surface area: 5.67 m2

Suspended 9 mm PET Felt tested to ISO 354:2003.

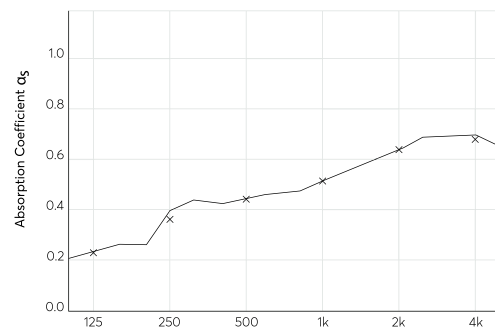

	Frequency (Hz)					
	0.16	0.21	0.38	0.43	0.55	0.65
1/3 oct.	0.19	0.35	0.40	0.47	0.59	0.65
	0.21	0.39	0.42	0.51	0.64	0.61
1/1 oct.	0.19	0.32	0.40	0.47	0.59	0.64

αw (ISO 11654) = 0.45

SAA (ASTM - C423) = 0.45

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Finish	Driver Options
<input type="radio"/> Parkway		<input type="radio"/> 120V Phase Dimming



Luminart®

WWW.LUMINARTLIGHTING.COM