

PET RING™

ACOUSTICAL SUSPENSION

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

PET RING™


ACOUSTICAL SUSPENSION

TYPE:


PROJECT NAME:

Quickinfo

	Pet Ring S	Pet Ring M	Pet Ring L
luminaire size	655 × 38mm	905 × 38mm	1205 × 38mm
system power	↑36W ↓24W	↑48W ↓32W	↑72W ↓48W
luminous flux	↑5900lm ↓3100lm	↑7800lm ↓4200lm	↑12000lm ↓6000lm



Technical information




light distribution - up	115°
light distribution - down	60°
luminous efficiency	150lm/W
electrical control	Dimmable
color temperature	3000K - 6000K
life time	L80 (B10) 50,000H
luminaire color	black 9005 white 9010
fabric color	ARCHI felt ecoPET color palette

S

M

L

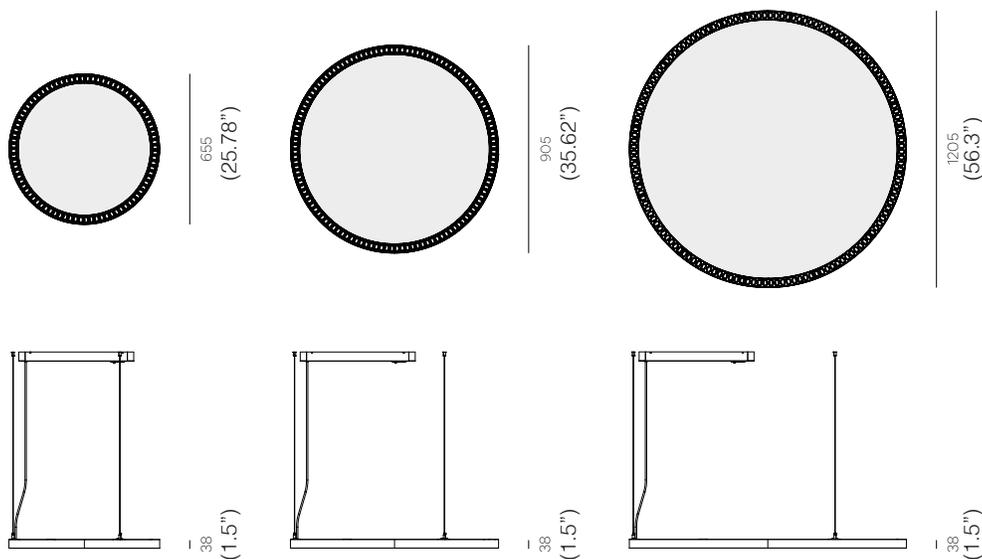

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Fabric Finish	LED	Power Options
<input type="radio"/> Pet Ring S	See next page	<input type="radio"/> 2700K	<input type="radio"/> 120V Phase Dimming
<input type="radio"/> Pet Ring M		<input type="radio"/> 3000K	<input type="radio"/> 120V 0-10V Dimming
<input type="radio"/> Pet Ring L		<input type="radio"/> 4000K	<input type="radio"/> 277V 0-10V Dimming



Luminart®

WWW.LUMINARTLIGHTING.COM

PET RING™


ACOUSTICAL SUSPENSION

TYPE:

PROJECT NAME:

ARCHI felt ecoPET 12 mm

EN The high-quality PET sound panels are robust, durable, and have a slightly textile surface that can be washed. They have excellent sound-absorbing properties, are flame-resistant and recyclable.

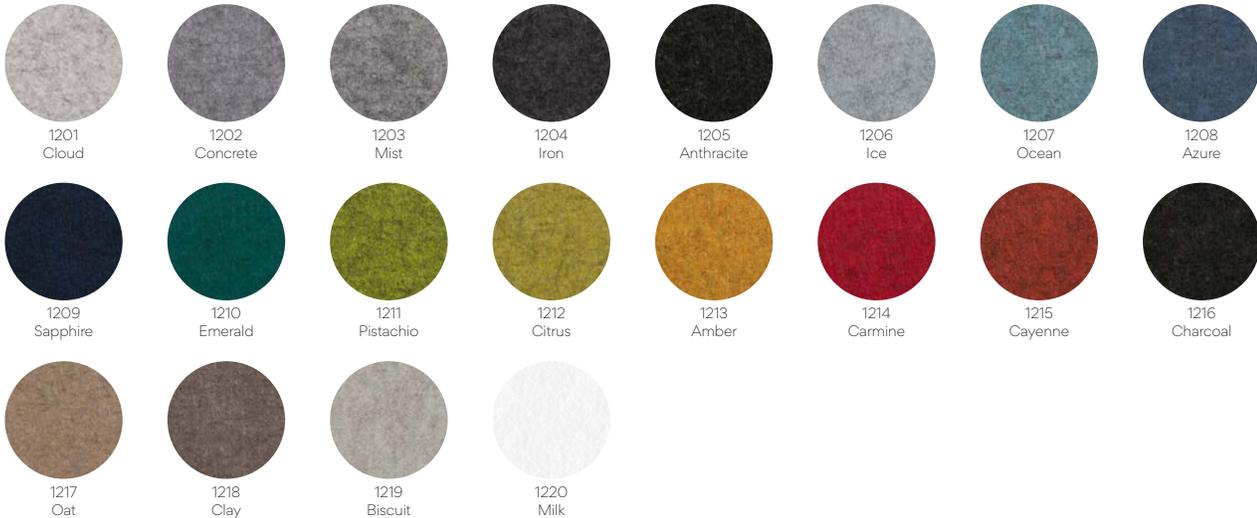

ARCHI felt ecoPET properties

Measurements

2800 mm × 1200 mm × 12 mm

gross size

Flammability Class

B-s1,d0

Acoustic values

Mounting method	Directly on the wall	50 mm cavity	50 mm cavity + 50 mm rockwool	100 mm cavity	100 mm cavity + 100 mm rockwool
NRC (100–5000Hz)	0.40	0.75	0.95	0.80	1.00
aw (100–5000Hz)	0.25	0.60	1.00	0.80	0.95
Acoustic Class	D	C	A	B	A

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM