

IPE

WALL

TYPE:

PROJECT NAME:

SPECIFICATION SHEET



Luminart®


WWW.LUMINARTLIGHTING.COM

IPE


WALL

TYPE:

PROJECT NAME:




up and down



Ipe L16W1

Light Source	LED
Power	16 Watt
Kelvin	2700, 3000
Lumen	1320
CRI	90




up and down




Ipe L16W2

Light Source	LED
Power	29 Watt
Kelvin	2700, 3000
Lumen	2650
CRI	90

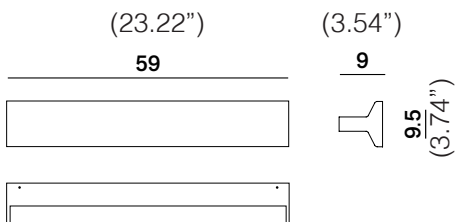


up and down




Ipe L16W3

Light Source	LED
Power	45 Watt
Kelvin	2700, 3000
Lumen	4250
CRI	90

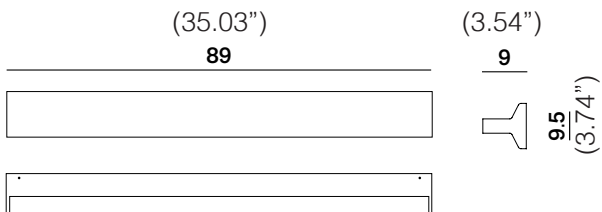

up and down



Ipe L16W4

Light Source	LED
Power	57 Watt
Kelvin	2700, 3000
Lumen	5380
CRI	90


SPECIFICATION SHEET

Luminart®





WWW.LUMINARTLIGHTING.COM

FINISH OPTIONS

Standard Matte Finish




Satin Finish (On Request)



Kerakoll Warm Finish (On Request)




Metallic Finish (On Request)



INSTALLATION OPTIONS


Standard J-Box Installation

Fixture uses an integral driver and installs onto a standard junction box with a 4" backplate.



Remote Driver Installation

Fixture uses a remote driver with no junction box or backplate.

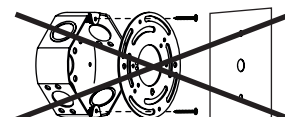

ORDERING INFO

Model (Order Code)	Finish	LED	Power Options	Installation Option
☐ L16W1		☐ 2700K	☐ 120V Phase Dimming	☐ Standard
☐ L16W2		☐ 3000K	☐ 120V 0-10V Dimming	☐ Remote
☐ L16W3			☐ 277V 0-10V Dimming	
☐ L16W4				

