
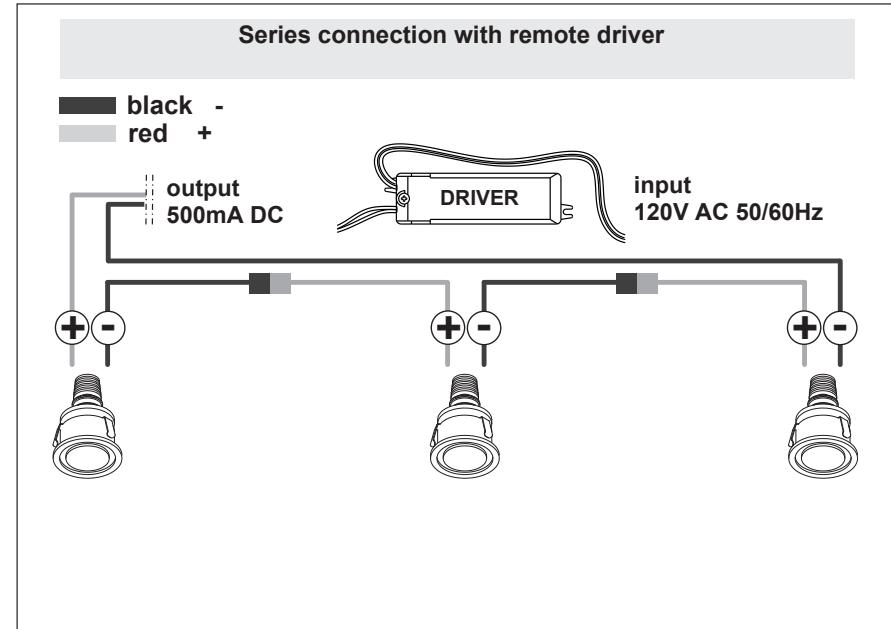


### Wallbox

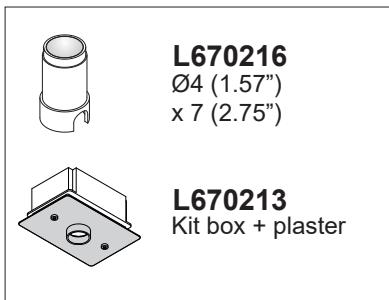

Before any operation on this equipment, disconnect the power supply. The fitting must not be covered with insulating material during the installation. An area clear of materials measuring up to 5 cm on the sides, must be kept around the light fixture. In order to grant a constant current, all leds must be connected in series, a parallel connection commonly used for halogen lamps destroys the leds in a short time. Too much current destroys the leds in few seconds while too little current decreases drastically its light efficiency. We advise against switch installation between driver and led. The leds must be installed in aerated rooms, far from heat sources. A situation of overworking or a lack of air circulation will not permit a natural dissipation of heat possibly leading to a dangerous rise of the temperature. The led drivers must be installed in aerated rooms far from heat sources. An eventual switching off of the led system after some working hours and the subsequent switching on again are caused by the intervention of the thermal protection of the driver, due to poor cooling caused by inadequate installation.