


POP 03 Ø6.0

RECESSED


TYPE:

PROJECT NAME:

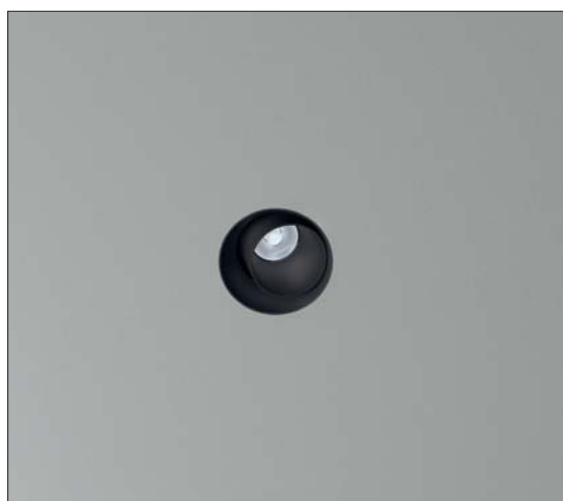

□ Frame

02 ● Black
06 ○ White




IP20

12V

L173P03.200.□ GU4 max 35W

L173KIT.201.050 max 50VA

Dimmable gear: 1GBT



IP40

350m/A

L173P03.2 S.□

■ Led color


Nominal lm

▲ Beam spread

2 = 2700K 1195

3 = 3000K 1257

4 = 4000K 1313



IP40

250m/A

L173N03.2 S.□

■ Led color

Nominal lm

▲ Beam spread

2 = 2700K 779

3 = 3000K 819

4 = 4000K 855

Housing for plasterboard Ø 7,6cm (2.99")

● L171Z00.060.01

ORDERING INFO

Model (Order Code)

Finish

LED

Remote Driver Options

○ 02 Black
○ 06 White

○ 2700K
○ 3000K
○ 4000K

○ 120V Phase Dimming
○ 120V 0-10V Dimming
○ 277V 0-10V Dimming



Luminart®

WWW.LUMINARTLIGHTING.COM