

ALPHA

SUSPENSION

TYPE:

PROJECT NAME:



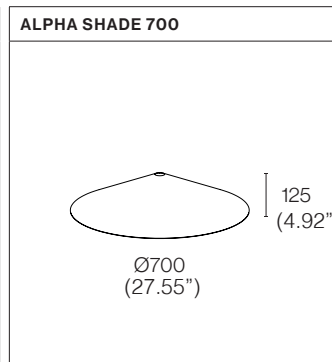
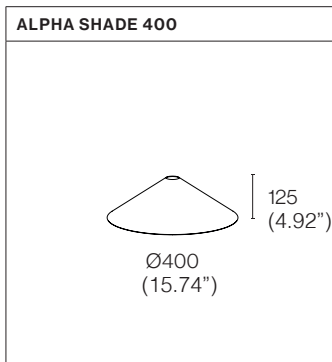
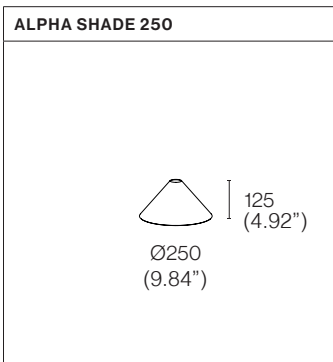
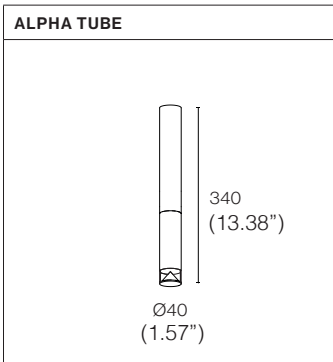
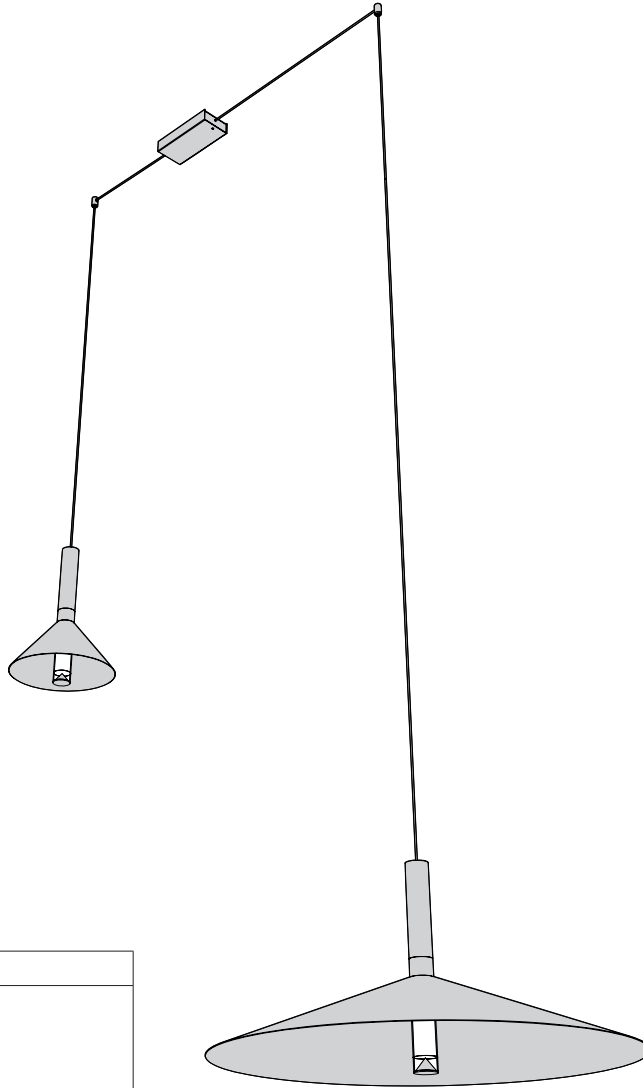
SPECIFICATION SHEET

ALPHA

SUSPENSION

TYPE:

PROJECT NAME:







SPECIFICATION SHEET

ALPHA

SUSPENSION

TYPE:

PROJECT NAME:

	<p>ALPHA TUBE</p>	<p>FINISH & ORDER CODE</p> <p>White L30T115H1DWL Brushed alu L30T115H1DAB Gunmetal L30T115H1DGM Metallic bronze L30T115H1DMB</p>	<p>LIGHT SPECS & ELECTRO</p> <p>Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 6W Voltage: 17.3V - 350mA Lumen: 800</p> <p>Beam angle: - CRI: 90</p>
	<p>EXCL. BASE & DRIVER</p>	<p>ADDITIONAL INFORMATION</p> <p>Custom RAL colours available on request Max. cable length 2500mm (98.42")</p>	
	<p>ALPHA 250</p>	<p>FINISH & ORDER CODE</p> <p>White L30T115H2DWL Brushed alu L30T115H2DAB Gunmetal L30T115H2DGM Metallic bronze L30T115H2DMB</p>	<p>LIGHT SPECS & ELECTRO</p> <p>Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 6W Voltage: 17.3V - 350mA Lumen: 800</p> <p>Beam angle: - CRI: 90</p>
	<p>EXCL. BASE & DRIVER</p>	<p>ADDITIONAL INFORMATION</p> <p>Custom RAL colours available on request Max. cable length 2500mm (98.42")</p>	
	<p>ALPHA 400</p>	<p>FINISH & ORDER CODE</p> <p>White L30T115H3DWL Brushed alu L30T115H3DAB Gunmetal L30T115H3DGM Metallic bronze L30T115H3DMB</p>	<p>LIGHT SPECS & ELECTRO</p> <p>Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 6W Voltage: 17.3V - 350mA Lumen: 800</p> <p>Beam angle: - CRI: 90</p>
	<p>EXCL. BASE & DRIVER</p>	<p>ADDITIONAL INFORMATION</p> <p>Custom RAL colours available on request Max. cable length 2500mm (98.42")</p>	
	<p>ALPHA 700</p>	<p>FINISH & ORDER CODE</p> <p>White L30T115H4DWL Brushed alu L30T115H4DAB Gunmetal L30T115H4DGM Metallic bronze L30T115H4DMB</p>	<p>LIGHT SPECS & ELECTRO</p> <p>Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 6W Voltage: 17.3V - 350mA Lumen: 800</p> <p>Beam angle: - CRI: 90</p>
	<p>EXCL. BASE & DRIVER</p>	<p>ADDITIONAL INFORMATION</p> <p>Custom RAL colours available on request Max. cable length 2500mm (98.42")</p>	




SPECIFICATION SHEET

ALPHA

SUSPENSION

TYPE:

PROJECT NAME:

 <p>Ø100 (3.93")</p>	<p>CEILING BASE SB100</p>	<p>FINISH & ORDER CODE</p> <table> <tr><td>Black</td><td>L30TB500T001ZL</td></tr> <tr><td>White</td><td>L30TB500T001WL</td></tr> <tr><td>Brushed alu</td><td>L30TB500T001AB</td></tr> <tr><td>Gunmetal</td><td>L30TB500T001GM</td></tr> <tr><td>Metallic bronze</td><td>L30TB500T001MB</td></tr> </table>	Black	L30TB500T001ZL	White	L30TB500T001WL	Brushed alu	L30TB500T001AB	Gunmetal	L30TB500T001GM	Metallic bronze	L30TB500T001MB
	Black	L30TB500T001ZL										
White	L30TB500T001WL											
Brushed alu	L30TB500T001AB											
Gunmetal	L30TB500T001GM											
Metallic bronze	L30TB500T001MB											
<p>ADDITIONAL INFORMATION</p> <p>Custom RAL colours available on request</p>												
 <p>Ø55 (2.16")</p>	<p>CEILING BASE SB55</p>	<p>FINISH & ORDER CODE</p> <table> <tr><td>Black</td><td>L30TBL011ZL</td></tr> <tr><td>White</td><td>L30TBL011WL</td></tr> <tr><td>Brushed alu</td><td>L30TBL011AB</td></tr> <tr><td>Gunmetal</td><td>L30TBL011GM</td></tr> <tr><td>Metallic bronze</td><td>L30TBL011MB</td></tr> </table>	Black	L30TBL011ZL	White	L30TBL011WL	Brushed alu	L30TBL011AB	Gunmetal	L30TBL011GM	Metallic bronze	L30TBL011MB
	Black	L30TBL011ZL										
White	L30TBL011WL											
Brushed alu	L30TBL011AB											
Gunmetal	L30TBL011GM											
Metallic bronze	L30TBL011MB											
<p>ADDITIONAL INFORMATION</p> <p>Custom RAL colours available on request</p>												
 <p>Ø10</p>	<p>COAX CABLE GUIDE</p>	<p>FINISH & ORDER CODE</p> <table> <tr><td>Black</td><td>L30TA001ZL</td></tr> <tr><td>White</td><td>L30TA001WL</td></tr> </table>	Black	L30TA001ZL	White	L30TA001WL						
	Black	L30TA001ZL										
White	L30TA001WL											
<p>ADDITIONAL INFORMATION</p> <p>Custom RAL colours available on request</p>												

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	LED	Power Options
	<input type="radio"/> 2700K	<input type="radio"/> 120V Phase Dimming
	<input type="radio"/> 3000K	<input type="radio"/> 120V 0-10V Dimming
	<input type="radio"/> 4000K	<input type="radio"/> 277V 0-10V Dimming

