

CNC.HC

CEILING RECESSED

TYPE:

PROJECT NAME:




SPECIFICATION SHEET


Luminart®

WWW.LUMINARTLIGHTING.COM


Lighting simulation:

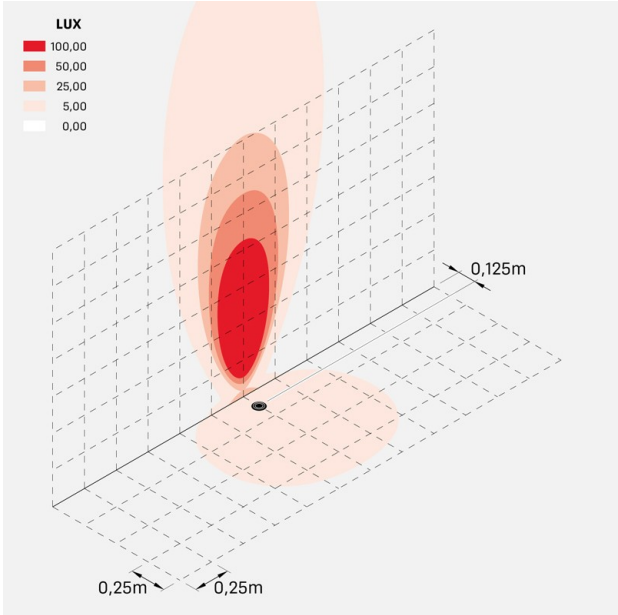

cnc_50t_20_honeycomb_optic_S

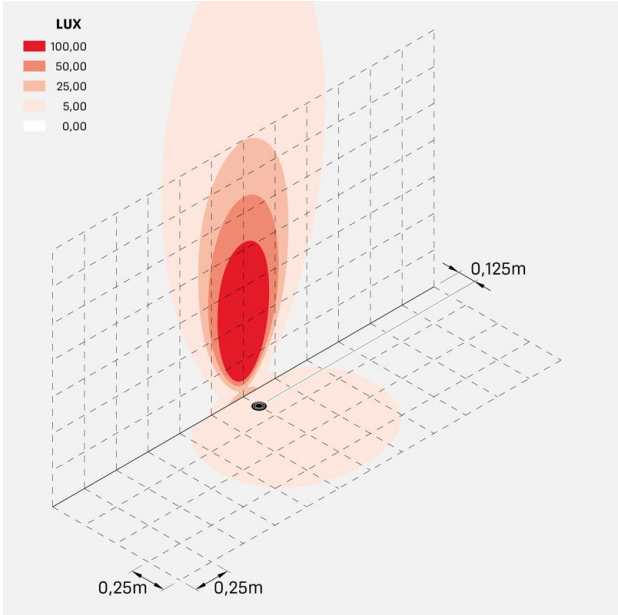


cnc_50t_20_honeycomb_optic_M

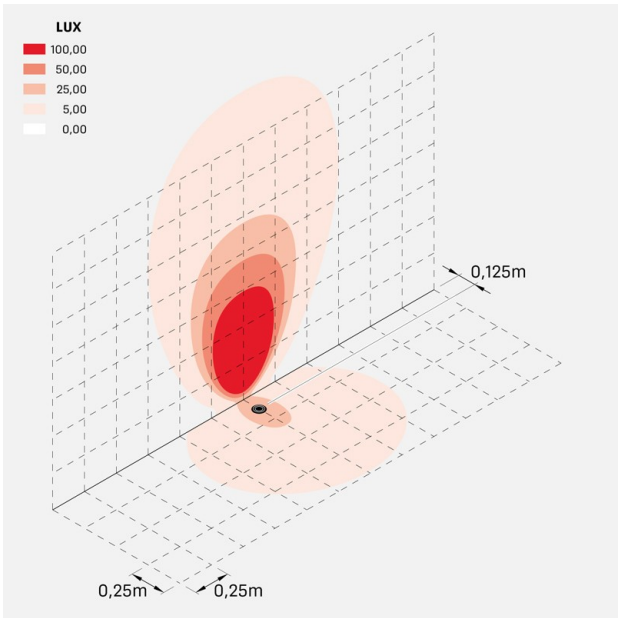

cnc_50t_20_honeycomb_optic_L



Installation images:





CNC.HC

CEILING RECESSED

TYPE:

PROJECT NAME:

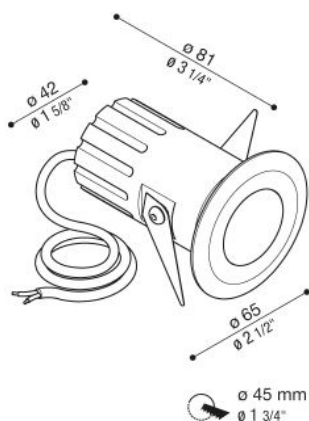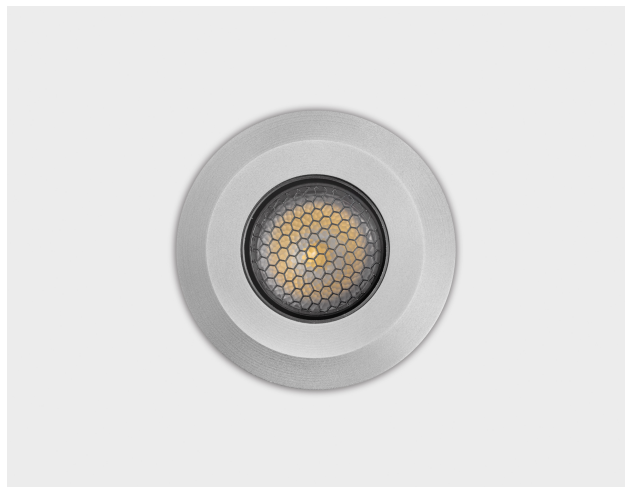

Technical information:

Installation:	Ground recess, Wall recess, Ceiling recess
Material:	Aluminium
Treatment:	Anodization
Diffuser type:	Transparent glass
Lamp type:	LED
Energy performance class:	G
CRI:	>90
LB Factor:	L80B20 - 100.000h
Step MacAdam:	3
Photobiological risk:	RG1
Power consumption (Watt):	6,5
Lumen:	694
Real Lumen:	392
LED:	24V
Version with:	 HONEYCOMB
Insulation class:	 CL.III
Power cable:	0.50 m H05RN-F 2x0.75
Cable:	H05RN-F 2x0.75 cable 4 5m
Type of protection:	IP 67
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK
Additional features:	 500^K Max Temp. max on diffuser 65°C

Optic D not available for Honeycomb version.

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Optics	Finish	LED	Remote Driver Option
CNC.HC L535020	☐ 25 degrees + honeycomb ☐ 30 degrees + honeycomb ☐ 50 degrees + honeycomb ☐ Diff (no honeycomb)	☐ Sandblasted Grey ☐ Grey Antracite ☐ Corten ☐ White ☐ Black	☐ 2300K ☐ 2700K ☐ 3000K ☐ 4000K	☐ 120V Phase Dimming ☐ 120V 0-10V Dimming ☐ 277V 0-10V Dimming



Luminart®

WWW.LUMINARTLIGHTING.COM