
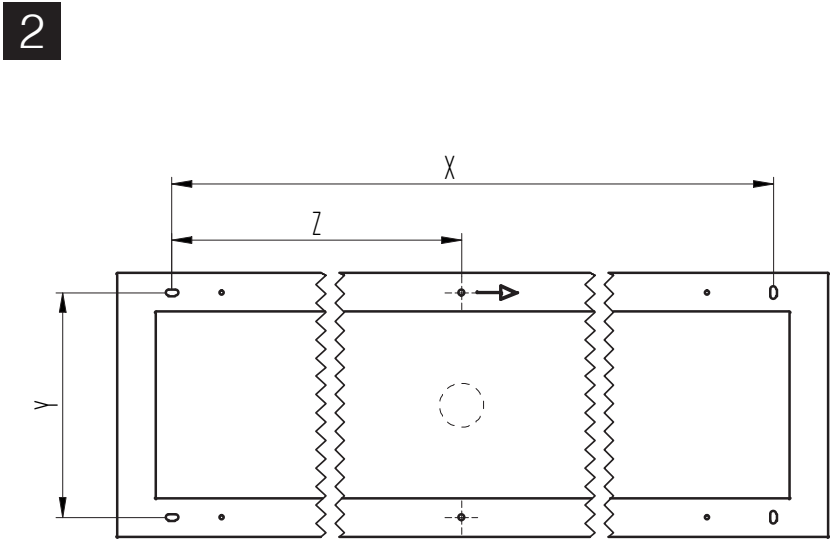


KASPER™ CEILING / WALL

INSTALLATION INSTRUCTIONS

TYPE:

PROJECT NAME:

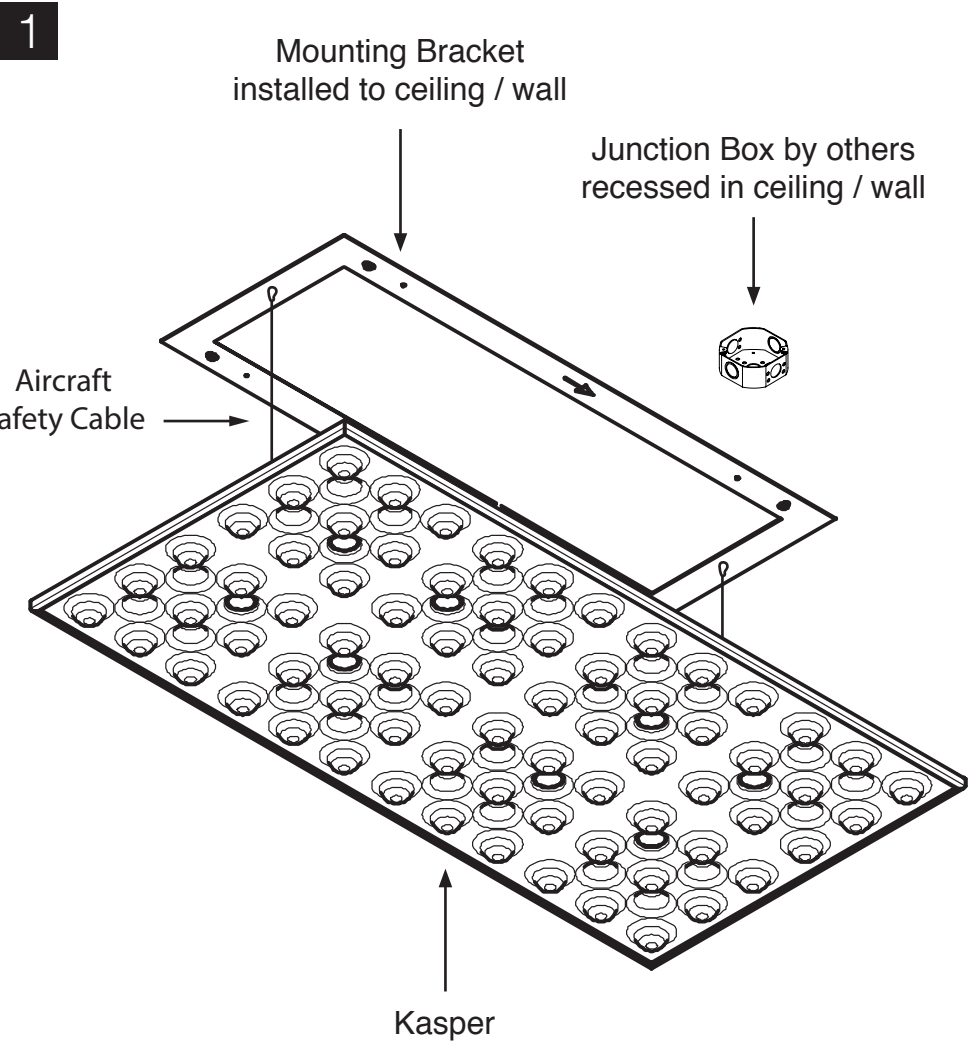

ATTENTION

Always position the mounting frame with the arrow to the right.

VERSION	X	Y	Z
4x8	21.25"	8.03"	-
4x16	52.75"	8.03"	26.37"
8x8	21.25"	23.77"	-
8x16	52.75"	23.77"	26.37"


KASPER™ CEILING / WALL

INSTALLATION INSTRUCTIONS

TYPE:


PROJECT NAME:

3 Drill the holes base on the measurement below.

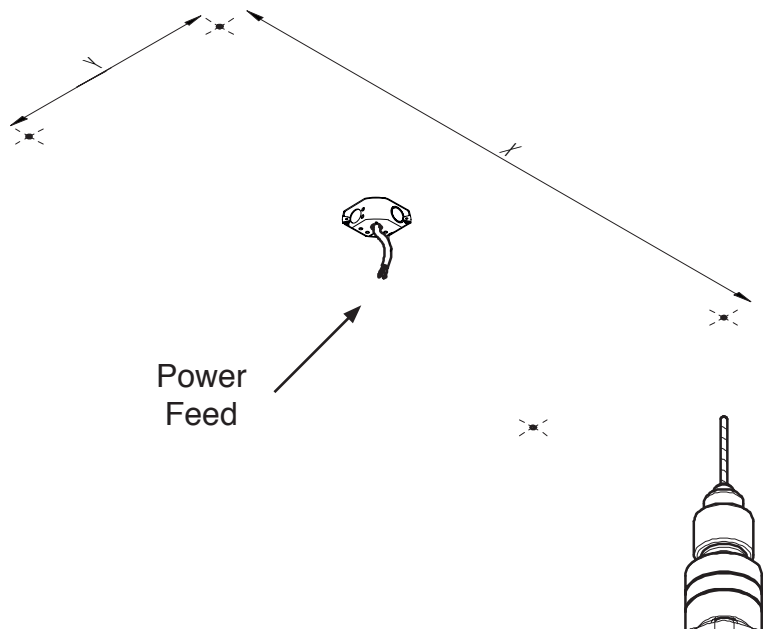

VERSION	X	Y	Z
4x8	21.25"	8.03"	-
4x16	52.75"	8.03"	26.37"
8x8	21.25"	23.77"	-
8x16	52.75"	23.77"	26.37"

4 Screw the mounting bracket to the wall.

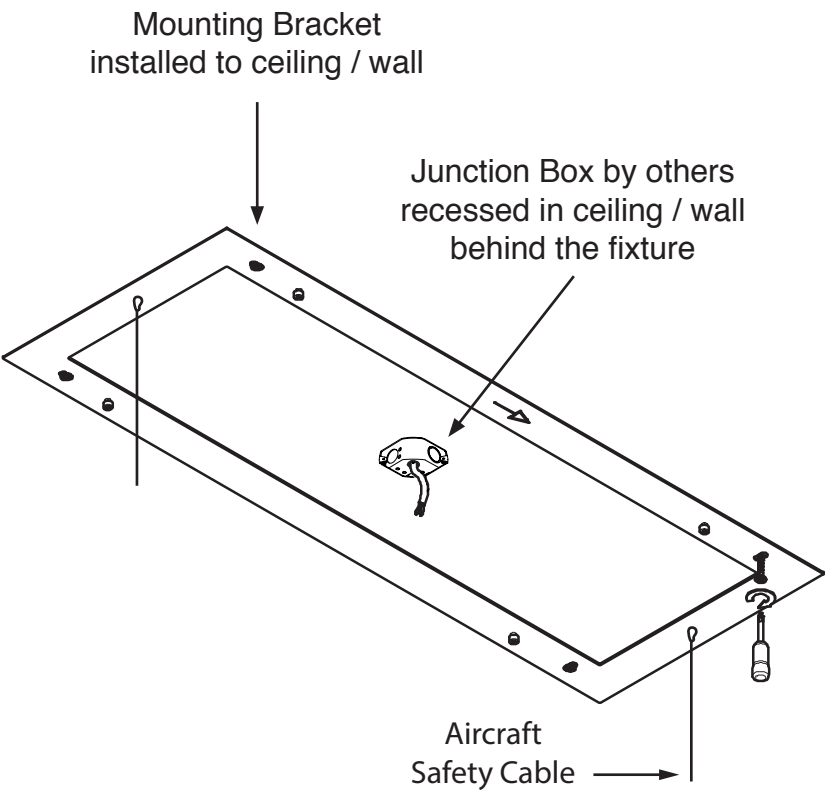


KASPER™ CEILING / WALL

INSTALLATION INSTRUCTIONS

TYPE:


PROJECT NAME:

- 5 Make the connections between fixture and the power feed.

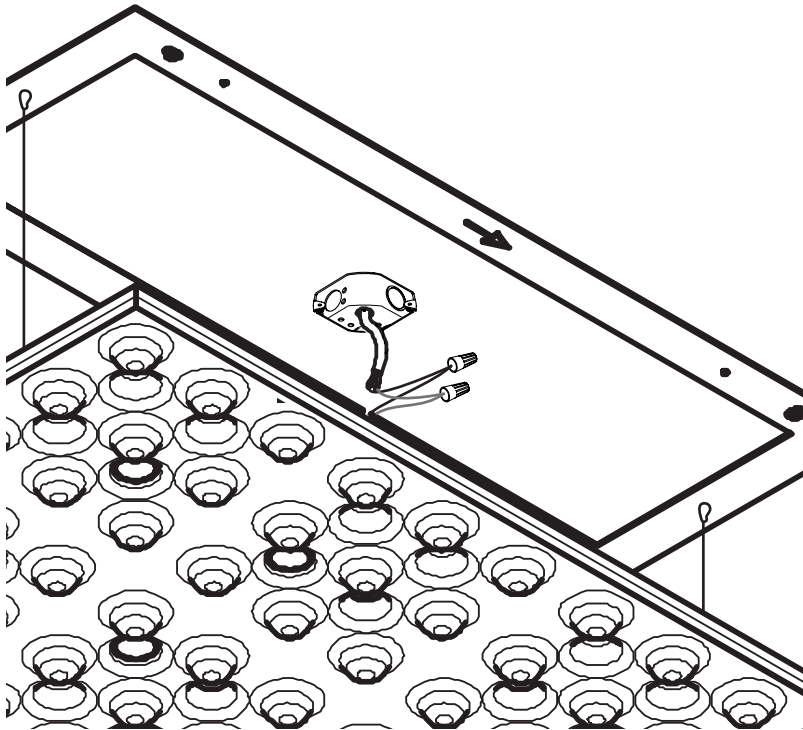

WIRING DIAGRAM


DIMMING 120V ONLY
TRIAC (LTE)

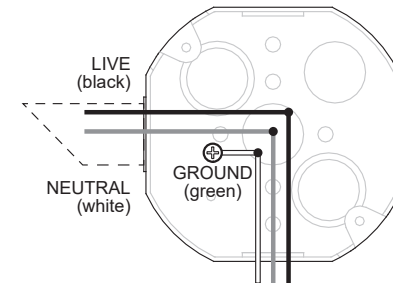

FIXTURE CABLES

WIRING DIAGRAM

DIMMING 120-277V
0-10V

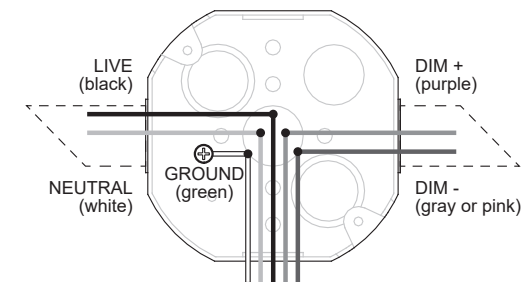

FIXTURE CABLES

*Junction box for reference only

KASPER™ CEILING / WALL

INSTALLATION INSTRUCTIONS

TYPE:

PROJECT NAME:

6 Lock the fixture to the mounting bracket by following the instructions A-B-C.

