

NOVA™

CEILING Ø350

TYPE:

PROJECT NAME:



Technical data

Light source	LED
Circuit structure	LED module vers.4
Light emission direction	direct
Power	21 W
Source lumens	3480 lm
Source efficacy	166 lm
Consumption	24 W
Delivered lumens	2210 lm
Luminaire efficacy	92 lm/W
Secondary	700mA
Colour temperature	3000K / 4000K
Colour rendering index	80 CRI
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°

Structure finish

gold

matte white


matte black



Technical drawing

Size

ref. image mm - inch

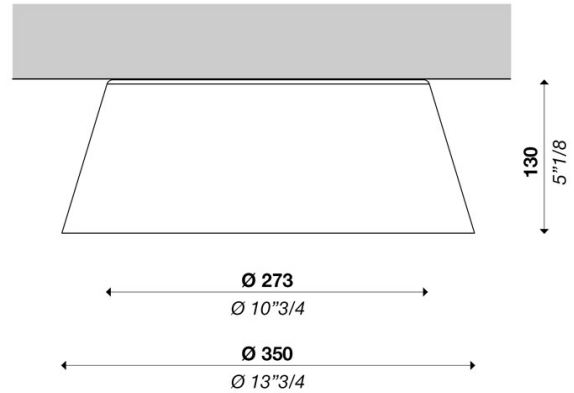

Structure

Material aluminum

Diffuser

Material pmma

Diffuser

opal

transparent
prismatic



SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Finish	Diffuser	LED	Driver Options
☐ L031690224U20000	☐ Matte Black ☐ Matte White ☐ Gold	☐ Opal ☐ Prismatic	☐ 3000K ☐ 4000K	☐ 120V Phase Dimming ☐ 120V 0-10V Dimming ☐ 277V 0-10V Dimming



Luminart®

WWW.LUMINARTLIGHTING.COM

NOVA™

CEILING Ø600

TYPE:

PROJECT NAME:




Technical data

Light source	LED
Circuit structure	LED module vers.4
Light emission direction	direct
Power	41 W
Source lumens	7000 lm
Source efficacy	171 lm
Consumption	44 W
Delivered lumens	4264 lm
Luminaire efficacy	97 lm/W
Secondary	1200mA
Colour temperature	3000K / 4000K
Colour rendering index	80 CRI
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°

Technical drawing

Size

ref. image mm - inch

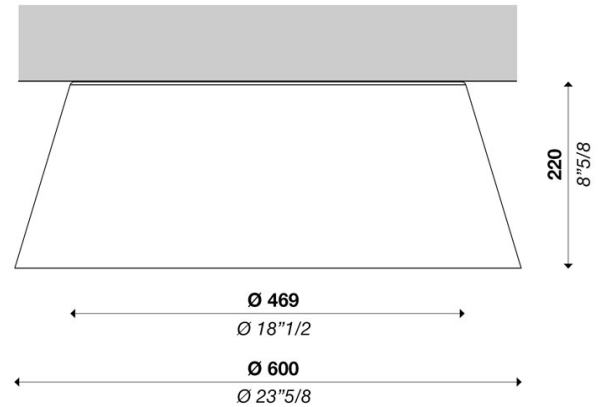

Structure

Material aluminum

Diffuser

Material pmma

Structure finish

gold

matte white

matte black



Diffuser

opal

transparent
prismatic



ORDERING INFO

Model (Order Code)	Finish	Diffuser	LED	Driver Options
☐ L031690225U20000	☐ Matte Black ☐ Matte White ☐ Gold	☐ Opal ☐ Prismatic	☐ 3000K ☐ 4000K	☐ 120V Phase Dimming ☐ 120V 0-10V Dimming ☐ 277V 0-10V Dimming



Luminart®

WWW.LUMINARTLIGHTING.COM

SPECIFICATION SHEET

NOVA™

CEILING Ø940

TYPE:

PROJECT NAME:




Technical data

Light source	LED
Circuit structure	LED module vers.3
Light emission direction	direct
Power	62 / 128 W
Source lumens	11760 / 22764 lm
Source efficacy	190 / 178 lm
Consumption	74 / 165 W
Delivered lumens	9407 / 17742 lm
Luminaire efficacy	127 / 108 lm/W
Secondary	550 / 1050 mA
Colour temperature	3000K / 4000K
Colour rendering index	80 CRI
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°

Technical drawing

Size ref. image mm - inch

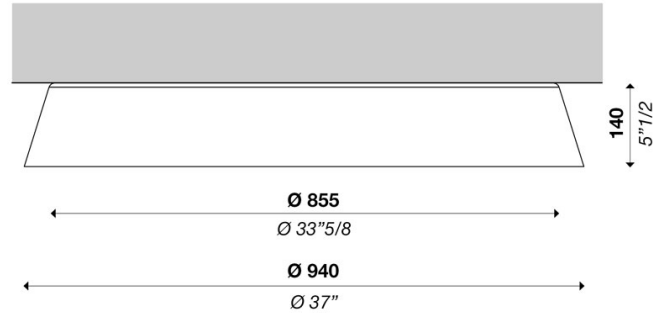

Structure

Material aluminum

Diffuser

Material pmma

Structure finish

gold

matte white

matte black



Diffuser

opal

transparent
prismatic



SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Finish	Diffuser	LED	Driver Options
☐ 62W: L031690226U20000	☐ Matte Black	☐ Opal	☐ 3000K	☐ 120V Phase Dimming
☐ 128W: L031690227U20000	☐ Matte White	☐ Prismatic	☐ 4000K	☐ 120V 0-10V Dimming
	☐ Gold			☐ 277V 0-10V Dimming



Luminart®

WWW.LUMINARTLIGHTING.COM