COTTON CEILING-WALL

INSTALLATION INSTRUCTIONS

TYPE:

PROJECT NAME:

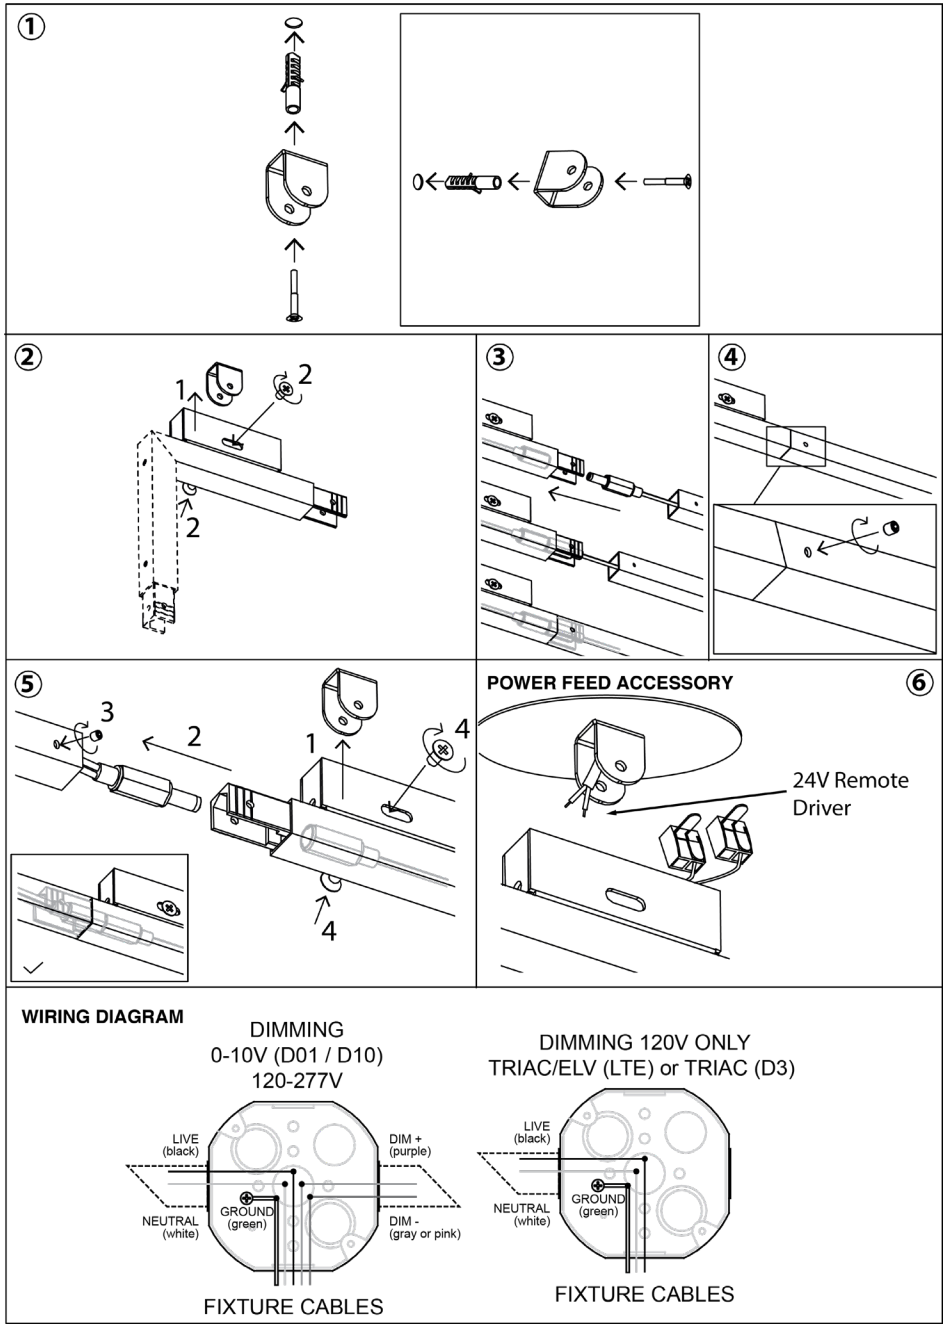

1. Assemble the mounting accessory.
Install the supplied fixing hardware onto the mounting bracket as shown.

2. Install the first accessory.
Position the first mounting accessory on the fixture and secure it using the supplied screws.

For 90° configurations (code A24-128), always begin assembly with this accessory.

3. Join fixture modules and accessories.
Align the connecting components and slide the modules together until fully engaged.

4. Secure the connection.
Align the fixing holes and tighten the supplied locking screw to secure the connection.

5. Install the connecting accessory.
Insert the accessory into the fixture profile and secure it using the supplied fixing hardware. Ensure all connections are properly tightened and the modules are securely joined.

6. Make connection to 24V Remote Driver.
Use wire connectors to connect fixture to 24V Remote Driver

INSTALLATION SHEET