

TRIM QUADRO™

WALL RECESSED - UPLIGHT & DOWNLIGHT

TYPE:

PROJECT NAME:



light sources:

/XW LED max 1,5W 500mA 199lm 2700K

/WW LED max 1,5W 500mA 210lm 3000K

/W LED max 1,5W 500mA 221lm 4000K

life:

> **50.000 h**

step MacAdam:

3

Color Rendering Index:

>**80**

IP grade:

40

net weight:

0,04 Kg

finishes:



.01 white

.45 anodized aluminum

symbols:



Dimensions

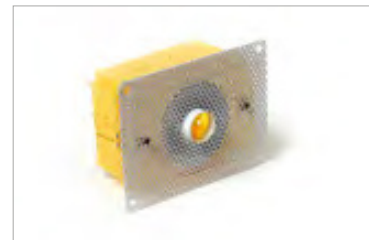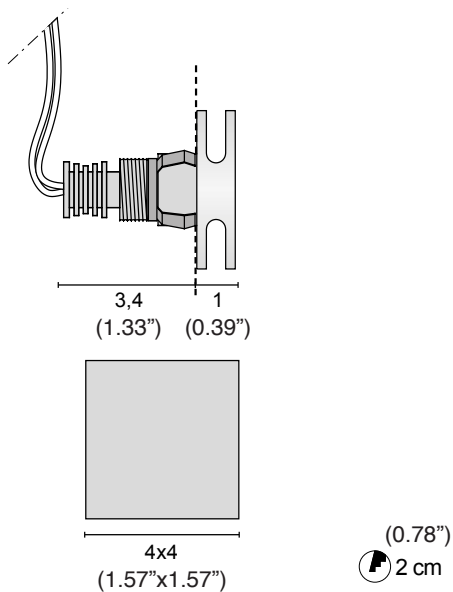

0212

KIT: box + perforated plaster



0215

Plastic box

ORDERING INFO

L676337

Model (Order Code)	Structure Finishes	LED	Accessories	Remote Driver Options
<input type="radio"/> L676337 1.5W	<input type="radio"/> 01: White <input type="radio"/> 45: Anodized Aluminum	<input type="radio"/> XW: 2700K <input type="radio"/> WW: 3000K <input type="radio"/> W: 4000K	<input type="radio"/> 0212: Kit box <input type="radio"/> 0215: Plastic box	<input type="radio"/> 120V LTE <input type="radio"/> 120-277V 0-10V



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 03/05/25

TRIM QUADRO™

WALL RECESSED - DOWNLIGHT

TYPE:

PROJECT NAME:





light sources:	/XW LED max 1,5W 500mA 199lm 2700K
	/WW LED max 1,5W 500mA 210lm 3000K
	/W LED max 1,5W 500mA 221lm 4000K

life:	> 50.000 h
step MacAdam:	3
Color Rendering Index:	> 80
IP grade:	40
net weight:	0,04 Kg
finishes:	.01 white .45 anodized aluminum

symbols:	  IP40 
----------	---

Dimensions

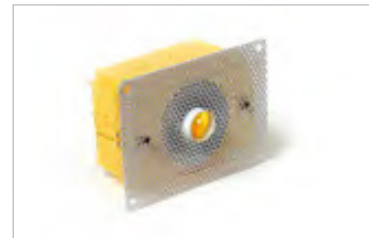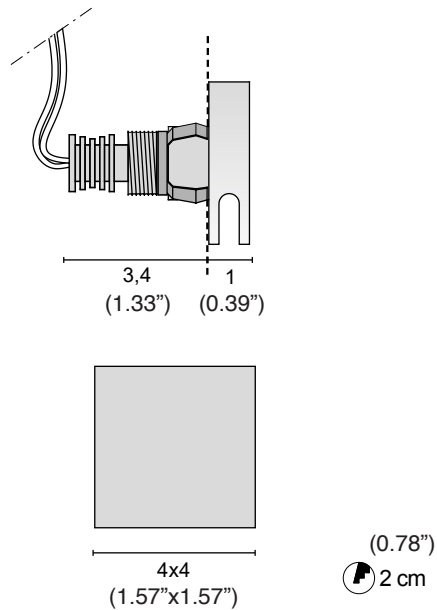

0212

KIT: box + perforated plaster



0215

Plastic box

ORDERING INFO

L676339

Model (Order Code)	Structure Finishes	LED	Accessories	Remote Driver Options
<input type="radio"/> L676339 1.5W	<input type="radio"/> 01: White <input type="radio"/> 45: Anodized Aluminum	<input type="radio"/> XW: 2700K <input type="radio"/> WW: 3000K <input type="radio"/> W: 4000K	<input type="radio"/> 0212: Kit box <input type="radio"/> 0215: Plastic box	<input type="radio"/> 120V LTE <input type="radio"/> 120-277V 0-10V

SPECIFICATION SHEET



Luminart®

WWW.LUMINARTLIGHTING.COM