
TYPE:

SAGITATM SUSPENSION

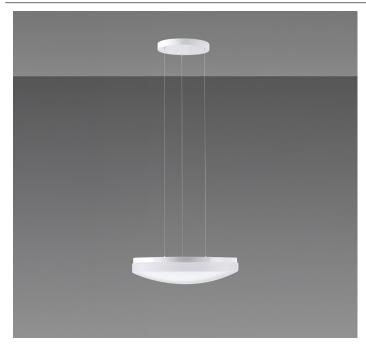

Round pendant light with shade diameter Ø400mm (15.74"). Product consists of cableless pendant and opal polycarbonate shade. Shade is fixed by two-step clamp holders. Suitable for indoor use.

Power input: 27W

Hanger: 3 wire with length 1000mm (39.37")

Mounting: Pendant

Shade: Opal polycarbonate

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V


Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White

Base material: Steel

. ш ш **ORDERING INFO** SH SPECIFICATION Model (Order Code) Structure Finish LED **Driver Options** OL74SAGITALE2 27W O 3000K O White Ral9003 ○ 120V Phase Dimming O 4000K O 120V 0-10V Dimming ○ 277V 0-10V Dimming Œ Intertek nar

PROJECT NAME:

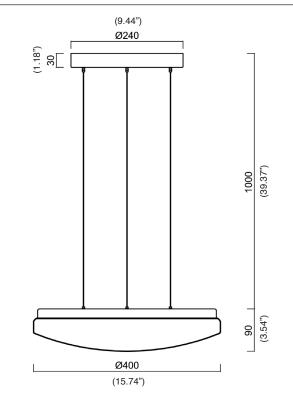

Source: LED module 3000K: 80CRI 4000K: 80CRI Lumen maintenance: >80% of initial lumens at 50,000h

Input [W]	Lum. flux of light source [Im]		Lum. flux of luminaire [Im]	
	3000K	4000K	3000K	4000K
27	3690	3890	2400	2530